

C-MOS QUAD SPST ANALOG SWITCH

■ GENERAL DESCRIPTION


The NJU201A is a quad break-before-make SPST analog switch protected up to 44V operating voltage.

All switches are controlled by TTL or C-MOS compatible input.


The low on-state resistance is about half compare with the NJU7301.

The NJU201A is functionally and pin-to-pin compatible with SILICONIX DG201A.

■ PACKAGE OUTLINE



NJU201AD




NJU201AM

■ FEATURES

- High Break Down Voltage -- 44V
- Low On-state Resistance
- Package Outline -- DIP/DMP 16
- C-MOS Technology


■ PIN CONFIGURATION



■ TRUTH TABLE

Logic (In)	Switch
0	ON
1	OFF

■ EQUIVALENT CIRCUIT

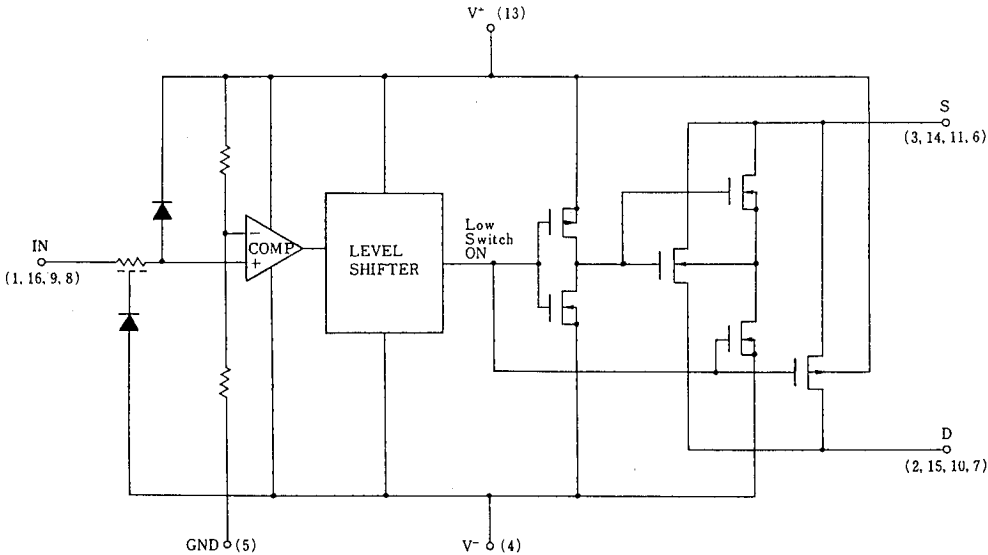

* Logic input threshold voltage V_{TH} is about $V^+ \times 0.128(V)$.
When the designing, enough margin is required.

■ TERMINAL DESCRIPTION

No.	SYMBOL	F U N C T I O N	No.	SYMBOL	F U N C T I O N
1	IN1	Control Signal Input	9	IN3	Control Signal Input
2	D1	Input/Output 1	10	D3	Input/Output 3
3	S1		11	S3	
4	V ⁻	Negative (V ⁻) Power Supply	12	NC	Non Connection
5	GND	Ground	13	V ⁺	Positive (V ⁺) Power Supply
6	S4	Input/Output 4	14	S2	Input/Output 2
7	D4		15	D2	
8	IN4	Control Signal Input	16	IN2	Control Signal Input

6

■ ABSOLUTE MAXIMUM RATINGS

(T_a=25°C)

P A R A M E T E R	SYMBOL	R A T I N G S	UNIT
Supply Voltage	V ⁺ - V ⁻	44	V
	V ⁺ - GND	19	
	GND - V ⁻	25	
Input Voltage	V _I , V _S , V _D	V ⁻ -0.5 ~ V ⁺ +0.5 *	V
Input Current	I _I	30	mA
	I _S , I _D Continuous	20	
	Peak Value (PW=1ms, Duty0.1)	70	
Power Dissipation	P _D	500 (DIP)/ 200 (DMP)	mW
Operating Temperature Range	T _{opr}	0 ~ + 70	°C
Storage Temperature Range	T _{stg}	- 65 ~ + 125	°C

* V⁺+0.5V must be 44V or less.

ELECTRICAL CHARACTERISTICS (DC CHARACTERISTICS)

($V^+=15V$, $V^-=-15V$, $GND=0V$)

P A R A M E T E R	S Y M B O L	C O N D I T I O N S		TYP	M A X			U N I T
				25℃	0℃	25℃	70℃	
Analog Signal Range	V _{ANALOG}			±15		±15	±15	V
On-state Resistance	R _{ON}	V _{IN} =0.8V I _S =-1mA	V _D =10V	50	100	100	125	Ω
			V _D =-10V	50	100	100	125	
Source-off Leakage Current	I _S (off)	V _I =2.4V	V _S =14V, V _D =-14V	0.01		5	100	nA
			V _S =-14V, V _D =14V	-0.02		- 5	-100	
Drain-off Leakage Current	I _D (off)	V _I =2.4V	V _D =14V, V _S =-14V	0.01		5	100	nA
			V _D =-14V, V _S =14V	-0.02		- 5	-100	
Drain-on Leakage Current	I _D (on)	V _I =0.8V	V _D =V _S =14V	0.1		5	200	nA
			V _D =V _S =-14V	-0.15		- 5	-200	
Input Current	I _{IH}	V _I =2.4V	-0.0004		- 1	- 10	μA	
		V _I =15V	0.003		1	10		
	I _{IL}	V _I =0V	-0.0004		- 1	- 10		
Quiescent Current	I ⁺	V _I =0 or 2.4V	0.9		2		mA	
	I ⁻		-0.3		- 1			

SWITCHING CHARACTERISTICS

($V^+=15V$, $V^-=-15V$, $GND=0V$)

PARAMETER	SYMBOL	CONDITIONS		TYP	MAX			UNIT
				25°C	0°C	25°C	70°C	
Turn-on Time	t _{on}	R _L =1kΩ, C _L =35pF		480		600		ns
Turn-off Time	t _{off}			370		450		
Charge Injection	Q	C _L =1000pF, V _{GEN} =0V, R _{GEN} =0Ω		20				pC
Source-Off Capacit.	C _S (off)	f=100kHz	V _S =0V, V _I =5V	5				pF
Drain-Off Capacit.	C _D (off)		V _D =0V, V _I =5V	5				
Channel-On Capacitance	C _D (on)		V _D =V _S =0V, V _I =0V	16				
	+C _S (on)							
Off Isolation	OIRR	V _S =2V _{P-P} , f=100kHz, R _L =75Ω		70				dB
Channel-to-channel Crosstalk	CCRR			90				

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.