



SBLB25L20CT THRU SBLB25L30CT

SCHOTTKY RECTIFIER

Reverse Voltage - 20 and 25 Volts **Forward Current - 25.0 Amperes**

TO-263AB

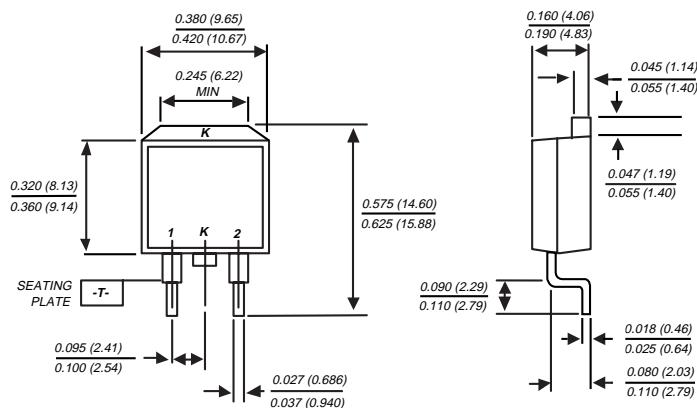

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High current capability
- ◆ Very low forward voltage drop
- ◆ High surge capability
- ◆ Guardring for overvoltage protection
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ High temperature soldering in accordance with CECC 802 / Reflow guaranteed



MECHANICAL DATA

Case: JEDEC TO-263AB molded plastic body

Terminals: Leads solderable per MIL-STD-750, Method 2026

Polarity: As marked

Weight: 0.08 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	SBLB25L20CT	SBLB25L25CT	SBLB25L30CT	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	25	30	Volts
Maximum RMS voltage	V _{RMS}	14	17	21	Volts
Maximum DC blocking voltage	V _{DC}	20	25	30	Volts
Maximum average forward rectified current at T _C =95°C	I _{F(AV)}		25.0		Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}		180.0		Amps
Maximum instantaneous forward voltage per leg at 12.5A (NOTE 1) T _C =125°C T _C =25°C	V _F		0.39 0.49		Volts
Maximum instantaneous reverse current at rated DC blocking voltage per leg (NOTE 1) T _C =25°C T _C =100°C T _C =125°C	I _R		1.0 50.0 100.0		mA
Typical thermal resistance per leg (NOTE 2)	R _{θJC}		1.5		°C/W
Operating junction and storage temperature range	T _J , T _{STG}		-40 to +125		°C

NOTES:

(1) Pulse test: 300μs pulse width, 1% duty cycle

(2) Thermal resistance from junction to case per leg

RATINGS AND CHARACTERISTIC CURVES SBLB25L20CT THRU SBLB25L30CT

