

PH100F24


SPECIFICATION


C101-01-01A

MODEL			PH100F	PH100F	PH100F	PH100F	PH100F	PH100F	PH100F		
ITEMS			24-2	24-3	24-5	24-12	24-15	24-24	24-48		
1	Nominal Output Voltage	V	2	3	5	12	15	24	28		
2	Maximum Output Current	A	20	20	20	8.4	6.7	4.2	3.6		
3	Nominal Output Power	W	40	60	100	100.8	100.5	100.8	100.8		
4	Efficiency (Typ.) (*1)	%	66	70	80	81	82	83	83		
5	Input Voltage Range	-	18 ~ 36VDC								
6	Input Current (Typ.) (*1)	A	2.53	3.57	5.21	5.19	5.11	5.06	5.06		
7	Output Voltage Accuracy (*1)	-	±1%								
8	Output Voltage Range (*10)	-	±20%		+20%, -60%						
9	Maximum Ripple & Noise (*9)	mV	100	100	100	150	150	240	280		
10	Maximum Line Regulation (*2)	mV	20	20	20	48	60	96	112		
11	Maximum Load Regulation (*3)	mV	40	40	40	96	120	192	224		
12	Over Current Protection (*4)	A	105% ~ 140%								
13	Over Voltage Protection (*5)	V	165% ~ 240%		125% ~ 145%						
14	Remote Sensing (*8)	-	Possible								
15	Remote ON/OFF Control (*8)	-	Possible (SHORT:ON OPEN:OFF)								
16	Parallel Operation (*8)	-	Possible								
17	Series Operation (*8)	-	Possible								
18	I.O.G. Signal (*8)	-	Possible (Open Collector Output)								
19	Operating Temperature (*6)	-	- 20℃ ~ + 85℃ (Base plate) Ambient Temperature MIN = - 20℃.								
20	Operating Humidity	-	30 - 95%RH (No Dewdrop)								
21	Storage Temperature	-	- 40℃ ~ + 85℃								
22	Storage Humidity	-	10 - 95%RH (No Dewdrop)								
23	Cooling (*7)	-	Conduction Cooled								
24	Temperature Coefficient (%)	-	0.02% / °C								
25	Withstand Voltage	-	Input-Baseplate : 2kVAC, Input-Output : 2kVAC(20mA) for 1min								
		-	Output-Baseplate : 500VDC(100mA) for 1min								
26	Isolation Resistance	-	More than 100Mohm at 25℃ and 70%RH Output-Baseplate...500VDC								
27	Vibration	-	At No Operating, 10-55Hz (Sweep for 1min)								
		-	Amplitude 0.825mm Constant (Maximum 49.0m/s ²) X,Y,Z 1h each								
28	Shock	-	196.1m/s ² (In package)								
29	Weight (Typ.)	-	180g								
30	Size (W x H x D)	mm	83 x 12.7 x 86 (Refer to Outline Drawing)								

=NOTES=

- *1. At 24VDC and Maximum Output Current.
- *2. 18 ~ 36VDC, Constant Load.
- *3. No load ~ Full load, Constant input voltage.
- *4. Constant current limiting with automatic recovery.
- *5. Inverter shutdown method, Manual Reset.
- *6. Ratings - Refer to Derating Curve on the Right.
- Load(%) is Percent of Maximum Output Current.
- *7. Heatsink has to be Chosen According to Instruction Manual.
- *8. Refer to Instruction Manual.
- *9 External Components are Needed for Operation.
(Refer to Basical Connection and Instruction Manual)
- *10 At 24VDC Input.(Refer to Instruction Manual.)

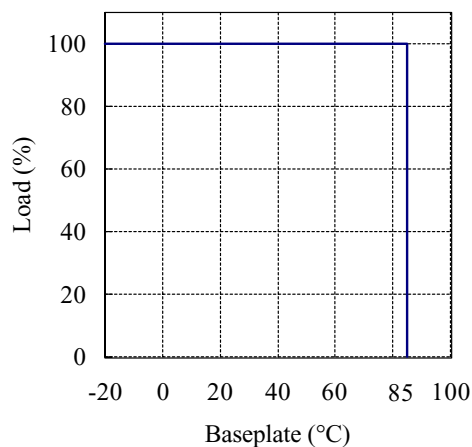DERATING CURVE

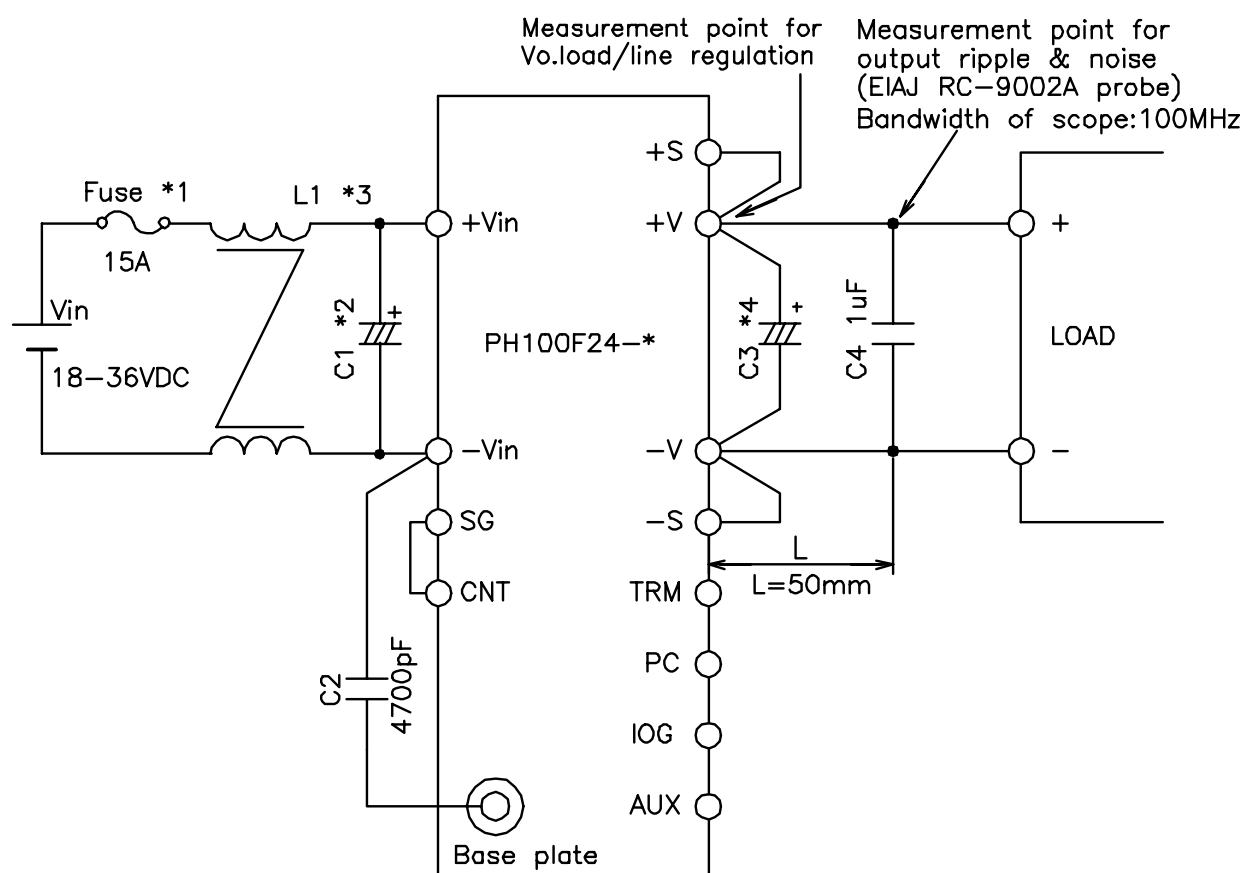


==NOTE==

- *1. Use an external fuse of fast blow type, for each unit.
- *2. When the input line impedance is high, insert input capacitor, C1, more than 470uF. (Refer to instruction manual)
- *3 Put an input common mode choke coil, L1, more than 1mH.
- *4. Put an output capacitor. (2,3V: more than 2,200uF, 5V: more than 1,000uF, 12V,15V: more than 470uF, 24V,28V: more than 220uF)
- *5. Refer to instruction manual for further details.

(unit : mm)	
MODEL NAME	PH100F24
	

C101-01-02

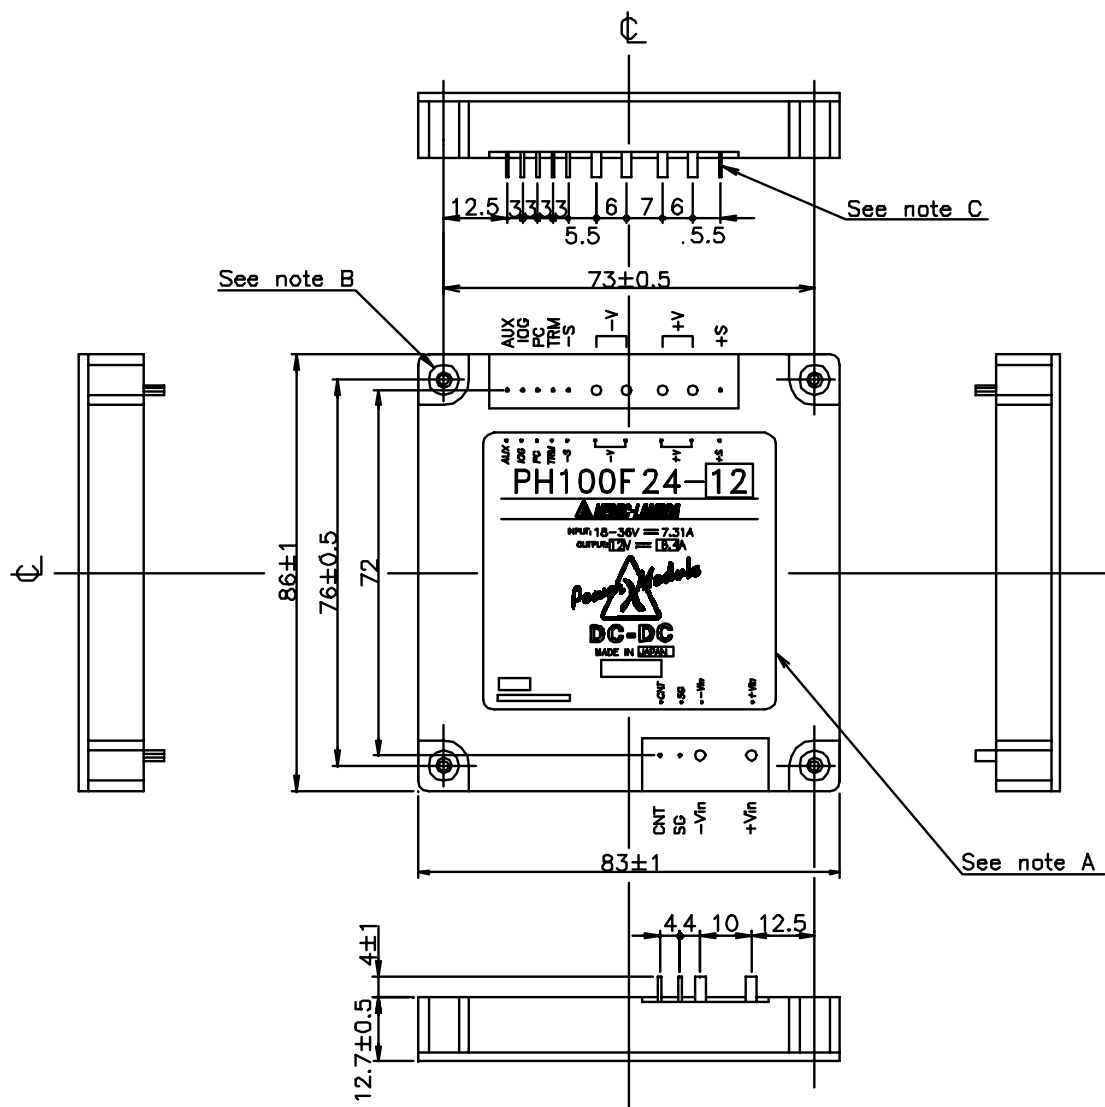

Notes

A: Model name, input voltage range, nominal output voltage, maximum output current and country of manufacture are shown here in accordance with the specifications.

B: M3 tapped holes 4 for customer chassis mounting (FG). Screws must not protrude into power module by more than 12.7mm. (Back side for heat sink.)

C: Input and output terminal... (6- $\phi 2$
8- $\phi 0.6$)

(unit : mm)

MODEL NAME	PH100F24-*

C101-02-01A