

UTC TA7738P LINEAR INTEGRATED CIRCUIT


AMPLIFIER SYSTEM FOR CASSETTE TAPE RECORDER

DESCRIPTION


The UTC TA7738P is an amplifier system, designed for a stereo set and a radio cassette tape recorder.

FEATURES

- *Recorder play balk for pre-amplifier
- *Buffer amplifier(recorder amplifier)
- *Power amplifier
- *Wide operating voltage range(3.5V to 9V)

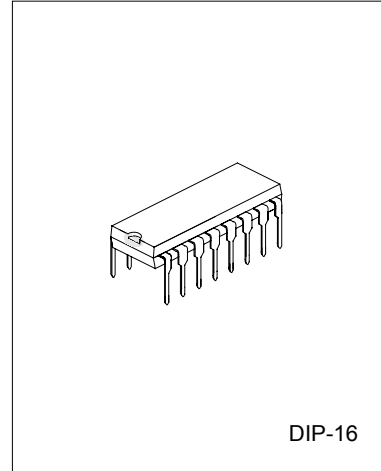

BLOCK DIAGRAM

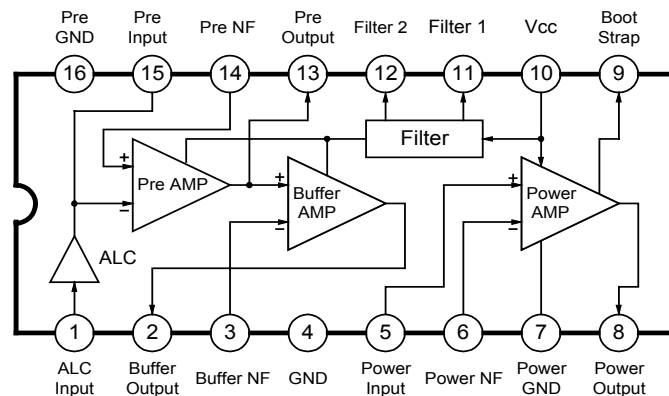

ABSOLUTE MAXIMUM RATING(Ta=25°C)

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	VCC	14	V
Output Current	I O(peak)	1.5	A
Power Dissipation*	PD	1200	mW
Operating Temperature	TOPR	-25~75	°C
Storage Temperature	TSTG	-55~150	°C

*Note: De-rated above Ta=25°C in proportion of 9.6mW/°C


UTC TA7738P LINEAR INTEGRATED CIRCUIT

ELECTRONIC CHARACTERISTICS (Ta=25°C, Vcc=6V, f=1kHz, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Total						
Quiescent Current	IccQ1	VCC=3.5V	7.5			mA
	IccQ2	VCC=6V	11		35	
Pre-amplifier						
Open Loop Voltage Gain	GvO1		55	70		dB
Closed Loop Voltage Gain	Gv1			40		dB
Maximum Output Voltage	VOUT1	THD<1%		0.7		Vrms
Input Impedance	RIN1	VOUT=0.5Vrms		30		kΩ
Equivalent Input Noise Voltage	VNI	Rg=0		1.4	2.5	μΩVrms
Pre-amplifier + Buffer amplifier						
Closed Loop Voltage Gain	Gv2	Pre-AMP GV=40dB Buff-AMP GV=20dB		60		dB
Maximum Output Voltage	VOUT2	THD=3%	1.5	1.7		Vrms
Equivalent Input Noise Voltage	VNO2	Rg=0, GV2=60dB		1.2	2.5	mVrms
ALC Effect	ALC1	VIN= -60dBm~ -20dBm		2		dB
ALC Range	ALC2	THD<1%		60		dB
Power amplifier						
Open Loop Voltage Gain	GvO1		60	70		dB
Closed Loop Voltage Gain	Gv1			40		dB
Maximum Output Power	POM	RL=4Ω, THD=10%	0.8	0.96		W
		VCC=9V, RLΩ, THD=10%		2		
Output Noise Voltage	VNO3	Rg=0, GV=40dB		0.3	1	mVrms

UTC TA7738P LINEAR INTEGRATED CIRCUIT

TEST CIRCUIT

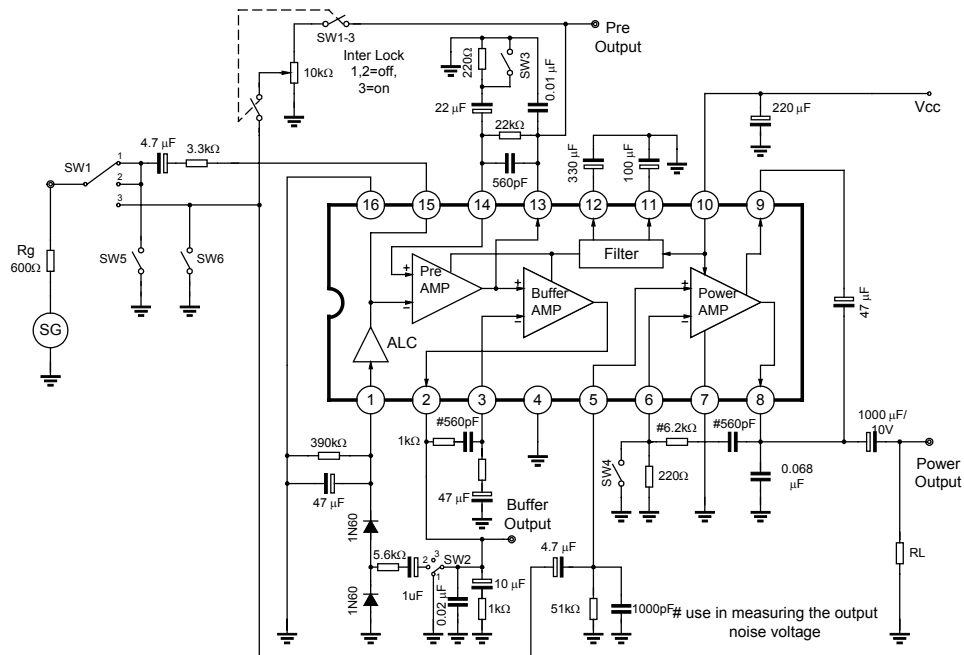


SWITCH MODE

TEST ITEM	SW1	SW2	SW3	SW4	SW5	SW6
GVO1	1	1	ON	OFF	OFF	OFF
GV1	1	1	OFF	OFF	OFF	OFF
VOUT1	1	1	OFF	OFF	OFF	OFF
GV2	1	3	OFF	OFF	OFF	OFF
VOUT2	1	3	OFF	OFF	OFF	OFF
VNO2	1	3	OFF	OFF	ON	OFF
ALC	1	2	OFF	OFF	OFF	OFF
GVO3	2	1	OFF	ON	OFF	OFF
GV3	2	1	OFF	OFF	OFF	OFF
PO	2	1	OFF	OFF	OFF	OFF
VNO3	2	1	OFF	OFF	OFF	ON

UTC TA7738P LINEAR INTEGRATED CIRCUIT

TYPICAL PERFORMANCE CHARACTERISTICS

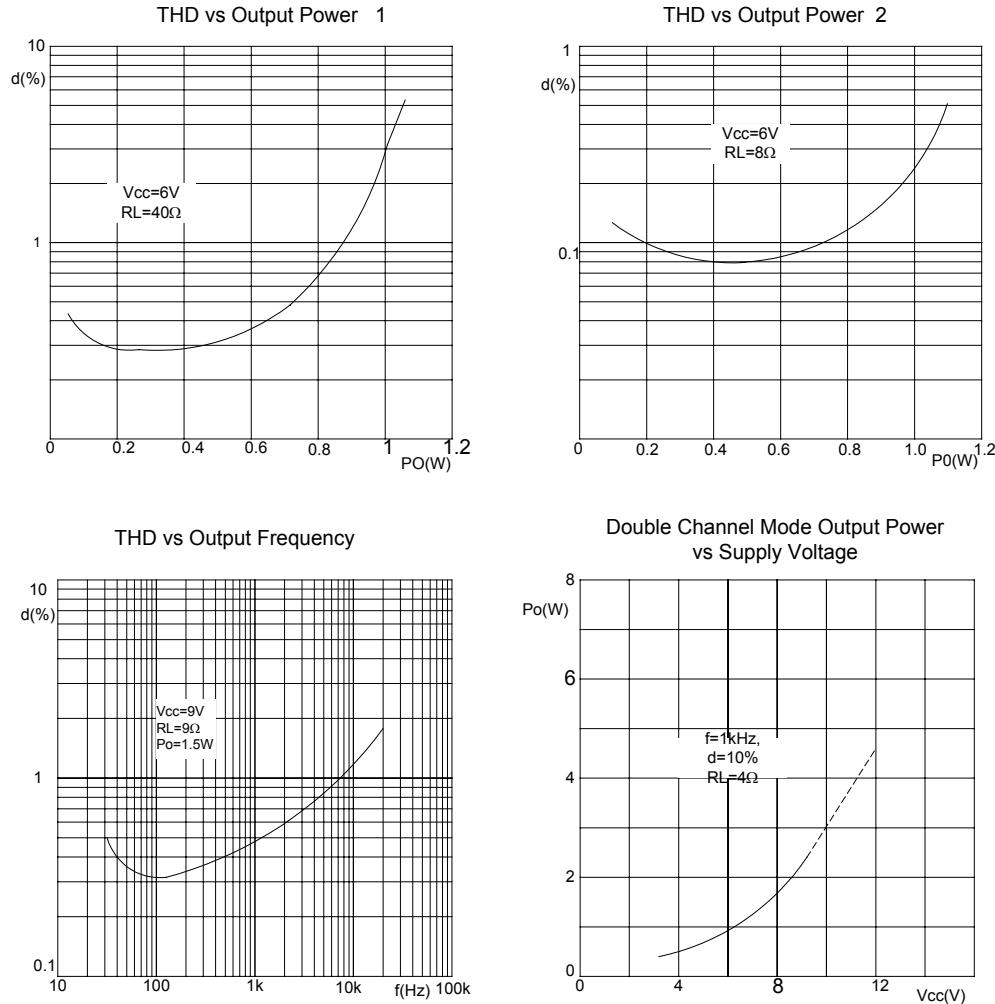

UTC TA7738P LINEAR INTEGRATED CIRCUIT

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.