


Series 850

PCB connectors 1.27 mm

Single row / double row / triple row

Solder tail

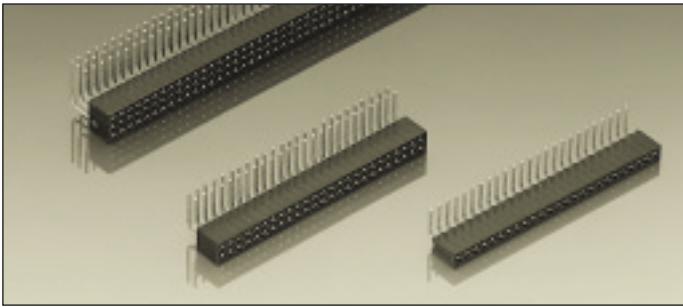


Ultraminiature PCB receptacles, solder tail


Grid spacing 1.27×1.27 mm

Receptacle for pins

Ø 0.35–0.45 mm

For corresponding pin connectors see pages 13, 14 and 15




Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	

Ordering information

Replace **xxx** with the number of poles, e.g. 853-91-**xxx**-20-001 for a double row version with 8 pins per row becomes:

853-91-**016**-20-001

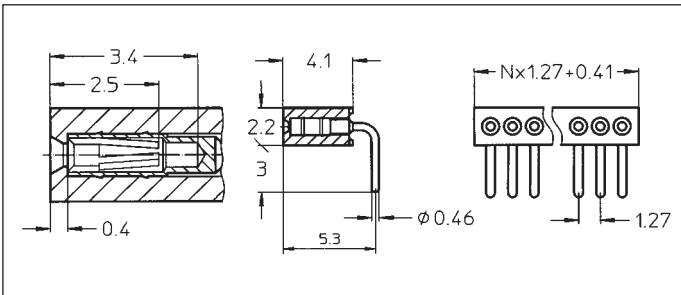


851-91-xxx-20-001

851-93-xxx-20-001

851-99-xxx-20-001

Right angle receptacle: solder tail, single row

Availability from: 1 to 50 contacts
Standard number of contacts 25 and 50

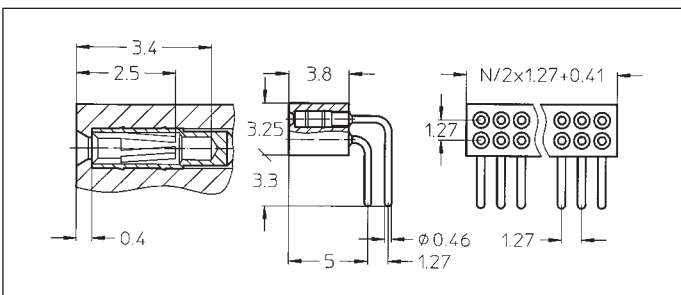


853-91-xxx-20-001

853-93-xxx-20-001

853-99-xxx-20-001

Right angle receptacle: solder tail, double row

Availability from: 4 to 100 contacts
Standard number of contacts 50 and 100

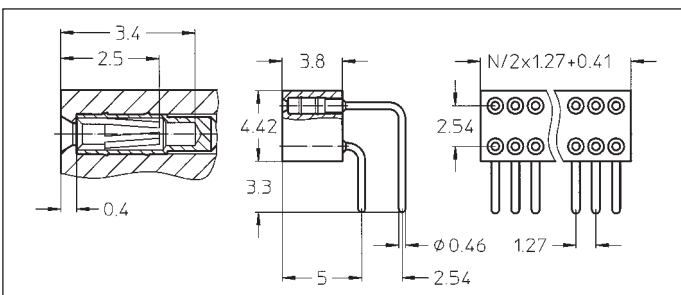


853-91-xxx-20-002

853-93-xxx-20-002

853-99-xxx-20-002

Right angle receptacle: solder tail, double row with 2.54 mm row to row distance

Availability from: 4 to 100 contacts
Standard number of contacts 100

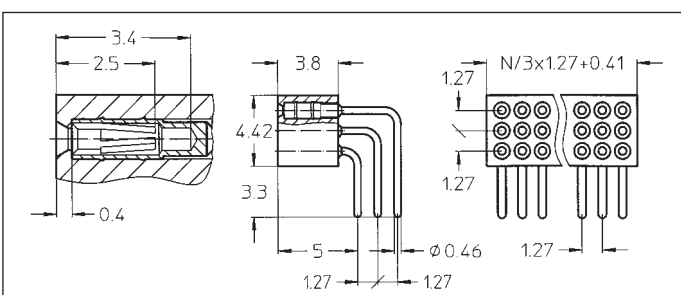

855-91-xxx-20-001

855-93-xxx-20-001

855-99-xxx-20-001

Right angle receptacle: solder tail, triple row

Availability from: 6 to 150 contacts
Standard number of contacts 150