


Series 800

PCB connectors 2.54 mm

Single row / double row


Solder tail

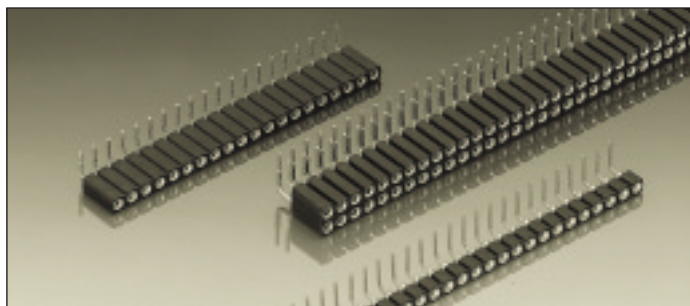


Right angle receptacles, solder tail

Receptacles accept square pins $\square$ 0.635 mm and round pins $\varnothing$ 0.70–0.80 mm

For corresponding receptacle connectors see pages 30 to 35




Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

Ordering information

Replace **xxx** with the number of poles, e.g. 803-91-**xxx**-20-001 for a double row version with 8 pins per row becomes:
803-91-**016**-20-001

Option:

Triple row right angle receptacles on request

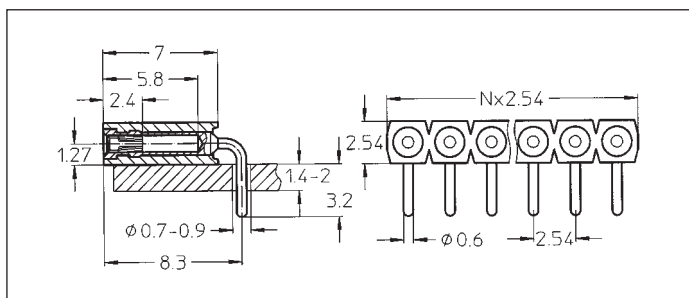


801-91-xxx-20-001

801-93-xxx-20-001

801-99-xxx-20-001

Right angle receptacle: solder tail, single row

Availability from: 1 to 50 contacts
Standard number of contacts 24, 28, 29, 30, 36, 42, 48, 50

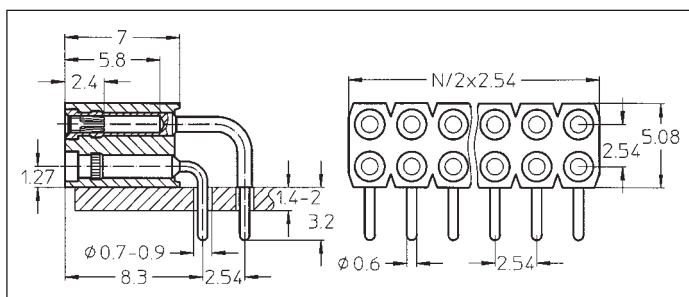


803-91-xxx-20-001

803-93-xxx-20-001

803-99-xxx-20-001

Right angle receptacle: solder tail, double row

Availability from: 4 to 100 contacts
Standard number of contacts 72 and 100

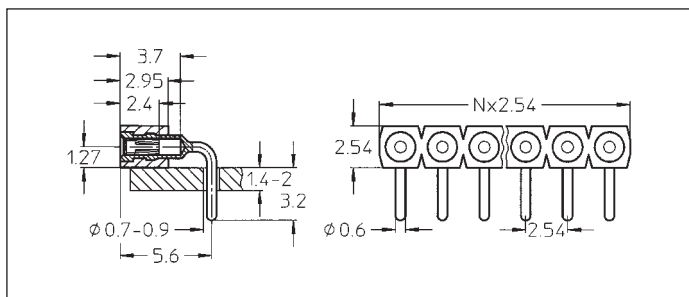

801-91-xxx-20-002

801-93-xxx-20-002

801-99-xxx-20-002

Right angle short receptacle: solder tail, single row

Availability from: 1 to 64 contacts
Standard number of contacts: 64

Right angle short receptacle: solder tail, double row available on request
Please consult