


Series 800

PCB connectors 2.54 mm

Single row / double row

Solder tail

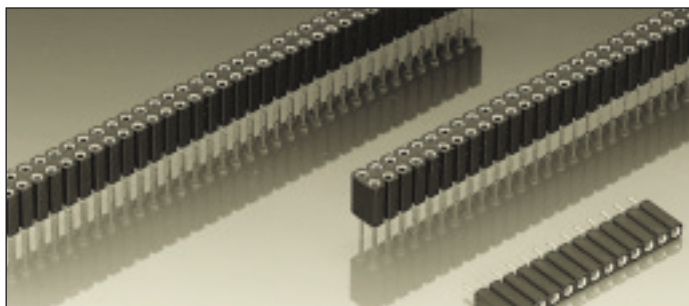

Receptacles, solder tail

Accept square pins $\square$ 0.635 mm
and round pins $\varnothing$ 0.70–0.80 mm




For corresponding pin connectors see pages 30 to 35


Ordering information

Replace **xxx** with the number of poles, e.g. 803-91-**xxx**-10-003
for a double row version with 8 pins per row becomes:
803-91-**016**-10-003

Option:

Triple row on request

Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

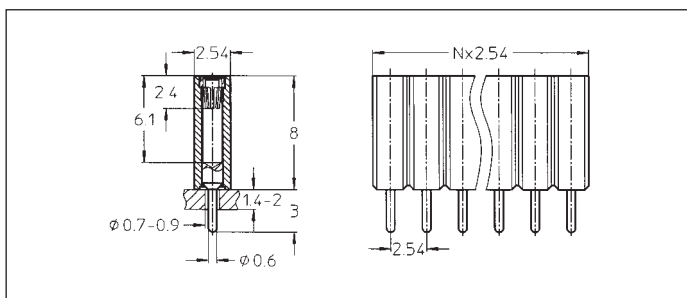


801-91-xxx-10-003

801-93-xxx-10-003

801-99-xxx-10-003

Straight receptacle height 8 mm:
solder tail, single row

Availability from: 1 to 36 contacts
Standard number of contacts 36

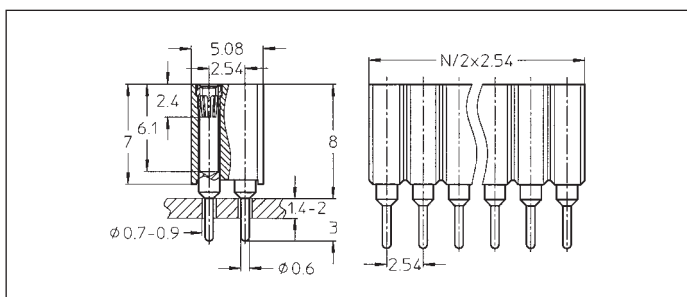


803-91-xxx-10-003

803-93-xxx-10-003

803-99-xxx-10-003

Straight receptacle height 8 mm:
solder tail, double row

Availability from: 4 to 100
contacts
Standard number of contacts 72
and 100

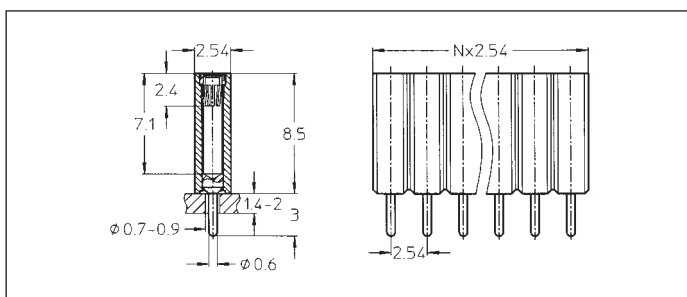


801-91-xxx-10-005

801-93-xxx-10-005

801-99-xxx-10-005

Straight receptacle height
8.5 mm: solder tail, single row

Availability from: 1 to 36 contacts
Standard number of contacts 36

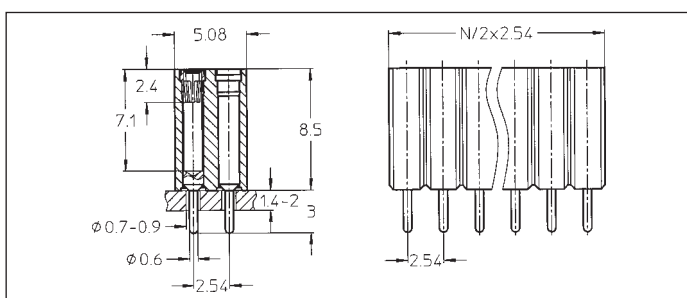

803-91-xxx-10-005

803-93-xxx-10-005

803-99-xxx-10-005

Straight receptacle height
8.5 mm: solder tail, double row

Availability from: 4 to 100
contacts
Standard number of contacts 100