


Series 800

PCB connectors 2.54 mm


Single row / double row

Solder tail

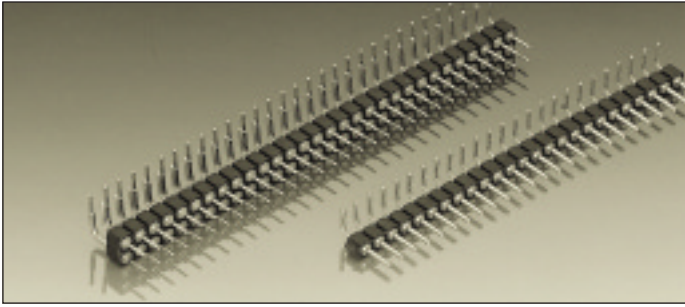

Right angle pin connectors, solder tail

Screw-machined pins $\varnothing$ 0.76 mm



For corresponding receptacles see pages 22 to 29

New:


Pin connectors with selective plated precision screw machined pin, plating code Z1.

Connecting side 1: gold plated
soldering/PCB side 2: tin plated

Ordering information

Replace **xx** with the number of poles, e.g. 802-10-**0xx**-20-001
for a double row version with 8 pins per row becomes:
802-10-**016**-20-001

Platings	Sleeve 	Clip 	Pin 
10 90 Z1			0.25 μ m Au 5 μ m Sn Pb 1: 0.25 μ m Au 2: 5 μ m Sn Pb

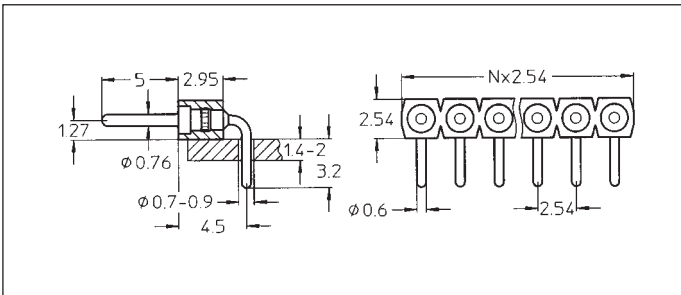


800-10-0xx-20-001

800-90-0xx-20-001

800-Z1-0xx-20-001

Right angle pin connector: solder tail, single row

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

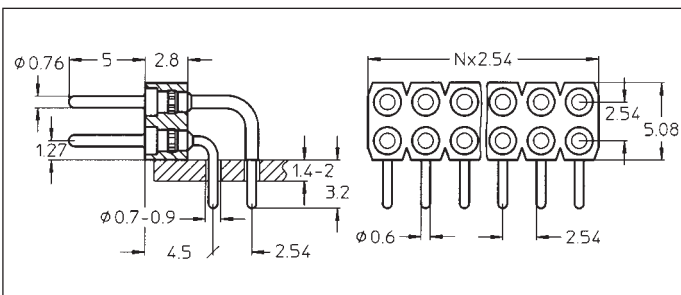

802-10-0xx-20-001

802-90-0xx-20-001

802-Z1-0xx-20-001

Right angle pin connector: solder tail, double row

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72