

**UZ1085****LINEAR INTEGRATED CIRCUIT****3A ADJUSTABLE/FIXED LOW
DROPOUT LINEAR
REGULATOR****DESCRIPTION**

The UTC **UZ1085-xx** series are low dropout three-terminal regulators with 3A output current capability. These devices have been optimized for low voltage applications including VTT bus termination, where transient response and minimum input voltage are critical.

Current limit is trimmed to ensure specified output current and controlled short-circuit current. On-chip thermal limiting provides protection against any combination of overload and ambient temperature that would create excessive junction temperatures.

FEATURES


- *Fast transient response
- *Low dropout voltage at up to 3A
- *Load regulation:0.05% typical
- *Trimmed current limit
- *On-chip thermal limiting


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UZ1085L-xx-TA3-T	UZ1085G-xx-TA3-T	TO-220	A/G	O	I	Tube
UZ1085L-xx-TN3-R	UZ1085G-xx-TN3-R	TO-252	A/G	O	I	Tape Reel
UZ1085L-xx-TQ2-R	UZ1085G-xx-TQ2-R	TO-263	A/G	O	I	Tape Reel
UZ1085L-xx-TQ2-T	UZ1085G-xx-TQ2-T	TO-263	A/G	O	I	Tube
UZ1085L-xx-TQ3-R	UZ1085G-xx-TQ3-R	TO-263-3	A/G	O	I	Tape Reel
UZ1085L-xx-TQ3-T	UZ1085G-xx-TQ3-T	TO-263-3	A/G	O	I	Tube


Note: 1. xx: Output Voltage, refer to Marking Information.

2. A: ADJ (for adjustable regulator), G: GND (for fixed regulator), O: V_{OUT} , I: V_{IN}



	(1) R: Tape Reel, T: Tube
	(2) TA3: TO-220, TN3: TO-252, TQ2: TO-263, TQ3: TO-263-3
	(3) xx: refer to Marking Information
	(4) G: Halogen Free, L: Lead Free

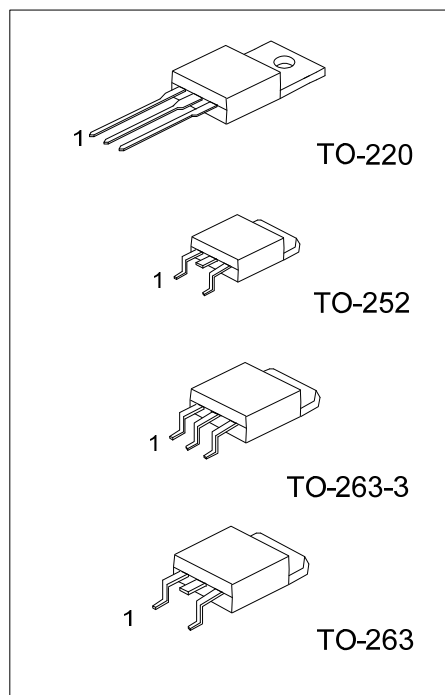

MARKING INFORMATION

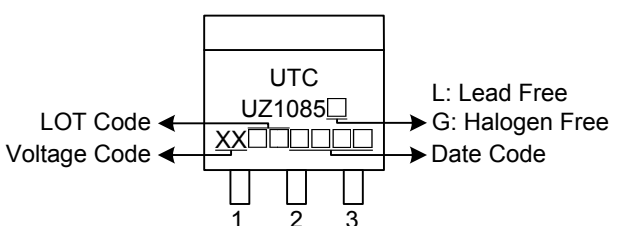PACKAGE	VOLTAGE CODE	MARKING
TO-220 TO-252 TO-263 TO-263-3	15 :1.5V 18 :1.8V 25 :2.5V 33 :3.3V 50 :5.0V AD:ADJ	 UTC UZ1085 XX □ □ □ □ □ □ 1 2 3 LOT Code ← Voltage Code → L: Lead Free G: Halogen Free Date Code

BLOCK DIAGRAM

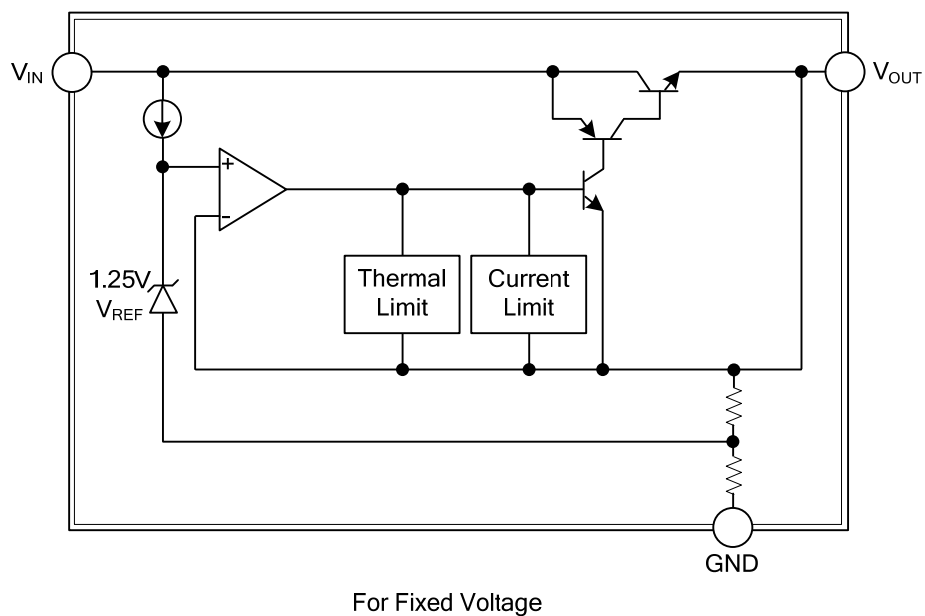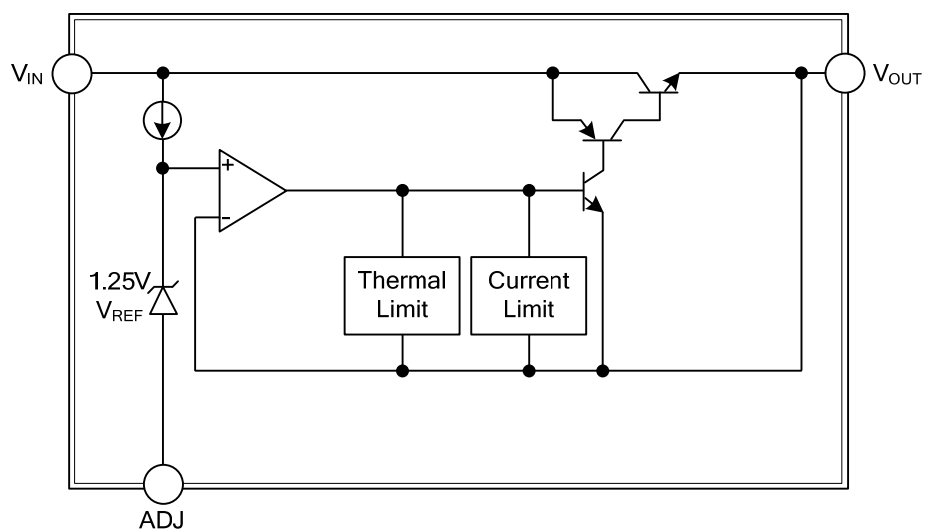

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	18	V
$(V_{IN} - V_{OUT}) \times I_{OUT}$		See Fig.1	
Junction Temperature	T_J	+125	°C
Operating Temperature	T_{OPR}	-40 ~ +85	°C
Storage Temperature	T_{STG}	-40 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-252	θ_{JA}	118	°C/W
	TO-220/ TO-263		62	°C/W
Junction to Case	TO-252	θ_{JC}	12	°C/W
	TO-220/ TO-263		4	°C/W

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, $C_{OUT}=22\mu\text{F}$, unless otherwise specified.)



For UZ1085-ADJ (Adjustable)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference Voltage	V_{REF}	$1.5V \leq (V_{IN} - V_{OUT}) \leq 8.25V, 10mA \leq I_{OUT} \leq 3A$	1.225	1.25	1.275	V
Line Regulation	ΔV_{OUT}	$(V_{OUT} + 1.5V) \leq V_{IN} \leq 12V, I_{OUT}=10mA$		0.005	0.2	%
Load Regulation	ΔV_{OUT}	$(V_{IN} - V_{OUT})=3V, 10mA \leq I_{OUT} \leq 3A$		0.05	0.5	%
Dropout Voltage	V_D	$\Delta V_{REF}\%=1\%, I_{OUT}=3A$		1.30	1.40	V
Current Limit	I_{LIMIT}	$(V_{IN}-V_{OUT})=2V$	3.1	4		A
Adjust Pin Current	I_{ADJ}			35	120	μA
Adjust Pin Current Change	ΔI_{ADJ}	$1.5V \leq (V_{IN} - V_{OUT}) \leq 12V, 10mA \leq I_{OUT} \leq 3A$		0.2	5	μA
Minimum Load Current	$I_{O(MIN)}$	$1.5V \leq (V_{IN}-V_{OUT}) \leq 12V$			10	mA
Quiescent Current	I_Q	$V_{IN}=12V$		4	13	mA
Ripple Rejection	RR	$f=120\text{Hz}$, Tantalum, $(V_{IN}-V_{OUT})=3V, I_{OUT}=3A$	60	72		dB
Thermal Regulation		$T_A=25^\circ\text{C}$, 30ms pulse		0.004	0.02	%/W
Temperature Stability	ΔV_{OUT}			0.5		%
Long-Term Stability	ΔV_{OUT}	$T_A=125^\circ\text{C}$, 1000hr		0.03	1.0	%
Output Noise(% of V_{OUT})	eN	$T_A=25^\circ\text{C}$, $10\text{Hz} \leq f \leq 10\text{kHz}$		0.003		%
Thermal Shutdown				150		°C







For UZ1085-xx (Fixed Voltage)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	UZ1085-15	V _{OUT}	3.0V≤V _{IN} ≤8.5V, 10mA≤I _{OUT} ≤3A	1.470	1.5	1.530	V
	UZ1085-18		3.3V≤V _{IN} ≤8.8V, 10mA≤I _{OUT} ≤3A	1.764	1.8	1.830	V
	UZ1085-25		4.0V≤V _{IN} ≤9.5V, 10mA≤I _{OUT} ≤3A	2.450	2.5	2.550	V
	UZ1085-33		4.8V≤V _{IN} ≤10.3V, 10mA≤I _{OUT} ≤3A	3.234	3.3	3.366	V
	UZ1085-50		6.5V≤V _{IN} ≤12V, 10mA≤I _{OUT} ≤3A	4.900	5.0	5.100	V
Line Regulation		ΔV _{OUT}	(V _{OUT} +1.5V) ≤V _{IN} ≤12V,I _{OUT} =10mA		0.005	0.2	%
Load Regulation		ΔV _{OUT}	(V _{IN} – V _{OUT})=3V, 10mA ≤ I _{OUT} ≤3A		0.05	0.5	%
Dropout Voltage		V _D	ΔV _{REF} %=1%, I _{OUT} =3A		1.30	1.40	V
Current Limit		I _{LIMIT}	(V _{IN} -V _{OUT})=2V	3.1	4		A
Minimum Load Current		I _{O(MIN)}	1.5V≤ (V _{IN} -V _{OUT}) ≤12V			10	mA
Quiescent Current		I _Q	V _{IN} =12V		4	13	mA
Ripple Rejection		RR	f=120Hz, Tantalum, (V _{IN} -V _{OUT})=3V,I _{OUT} =3A	60	72		dB
Thermal Regulation			T _A =25°C,30ms pulse		0.004	0.02	%/W
Temperature Stability		ΔV _{OUT}	T _A =125°C, 1000hr		0.5		%
Long-Term Stability		ΔV _{OUT}			0.03	1.0	%
Output Noise(% of V _{OUT})		eN	T _A =25°C,10Hz≤f≤10kHz		0.003		%
Thermal shutdown					150		°C




■ TYPICAL APPLICATION CIRCUIT

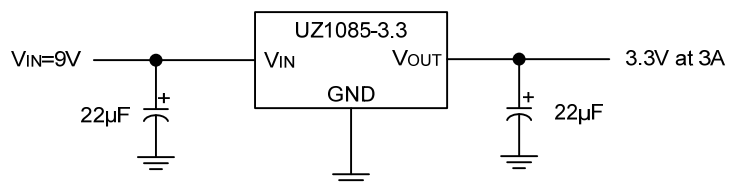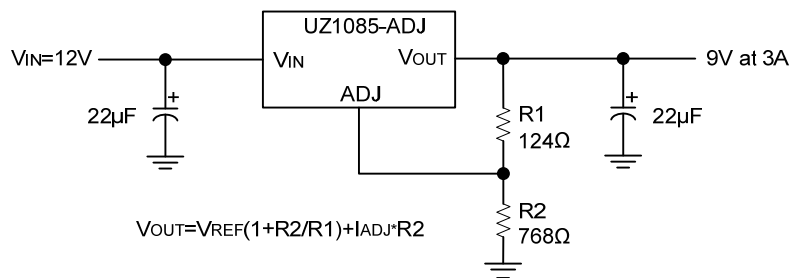

TYPICAL CHARACTERISTICS

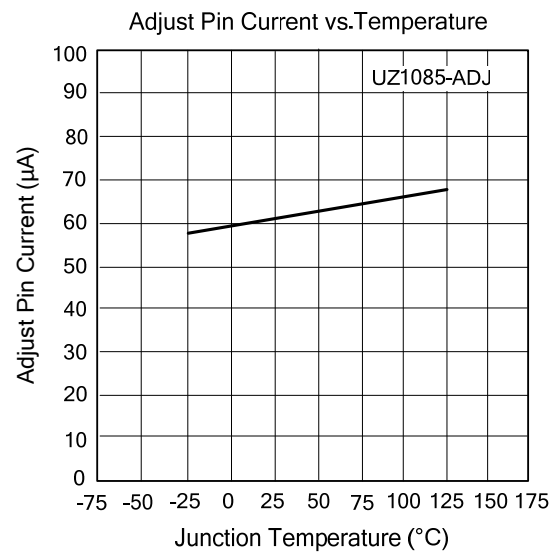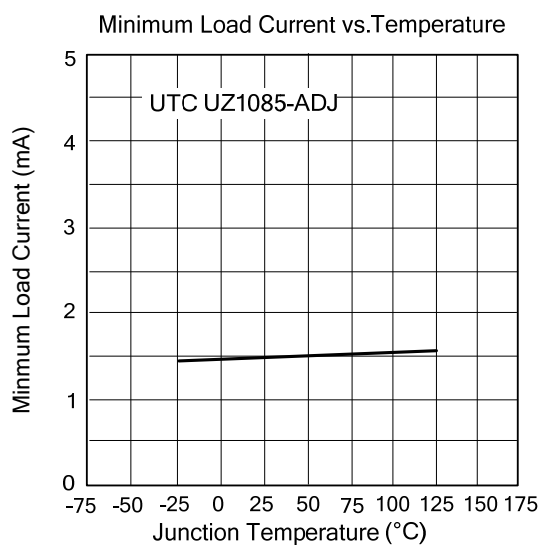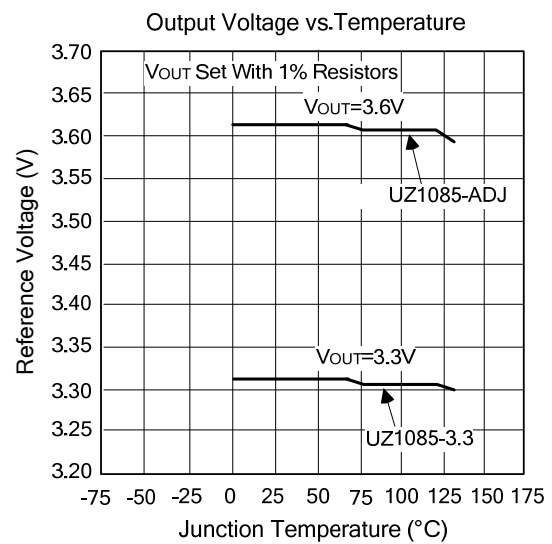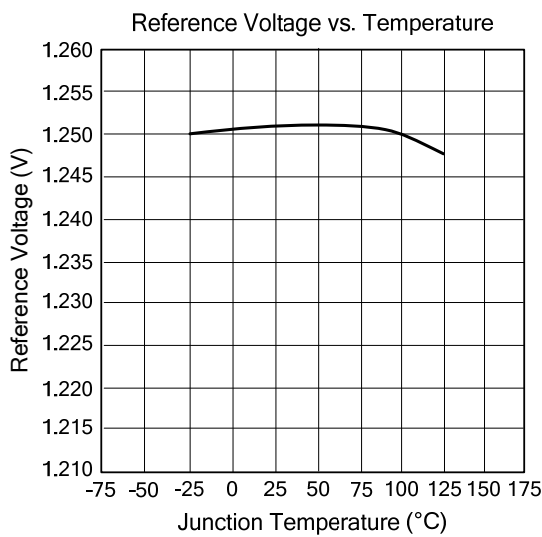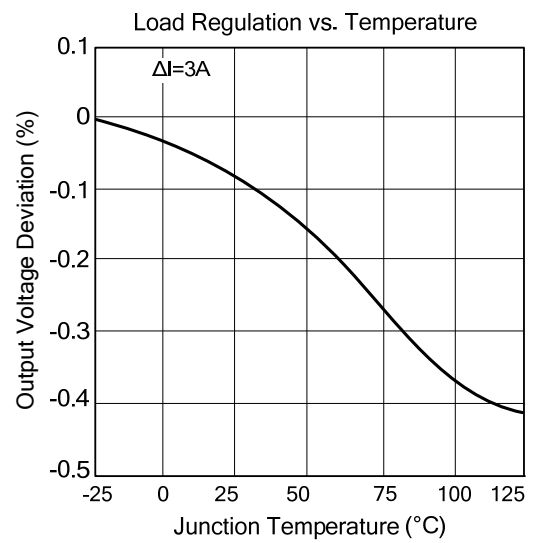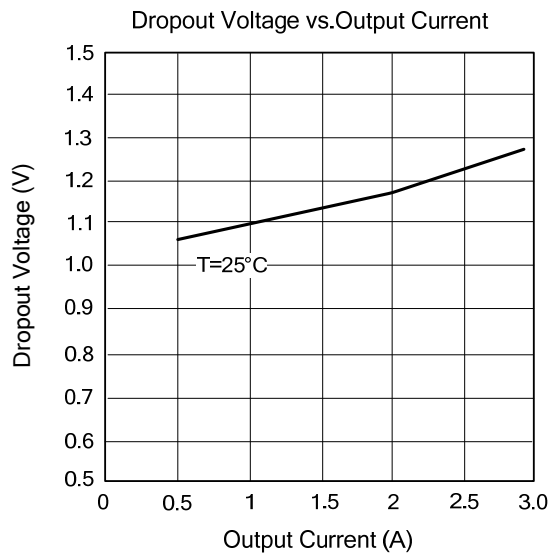

■ TYPICAL CHARACTERISTICS(Cont.)

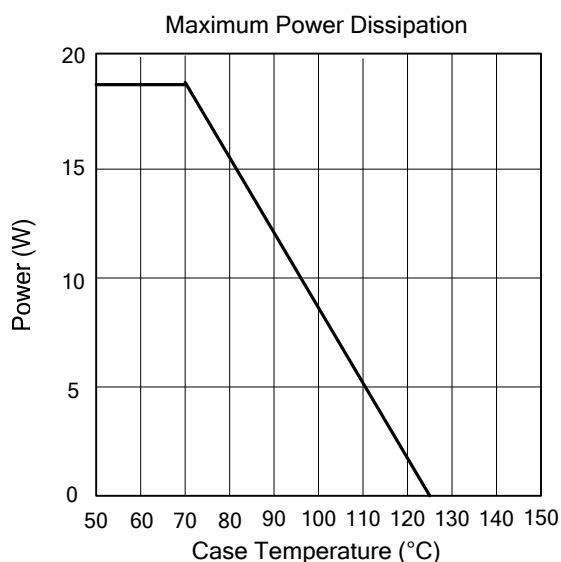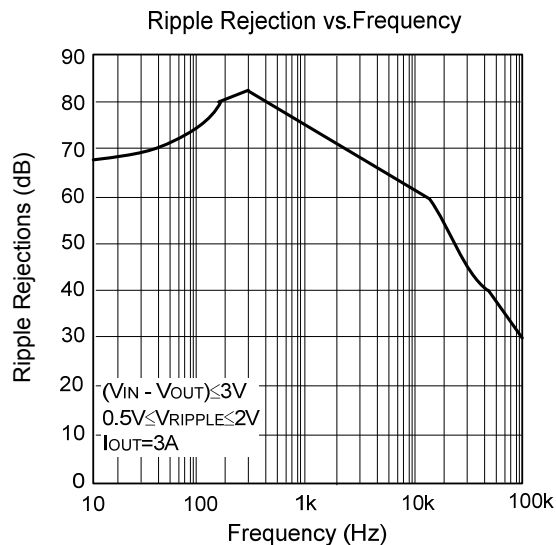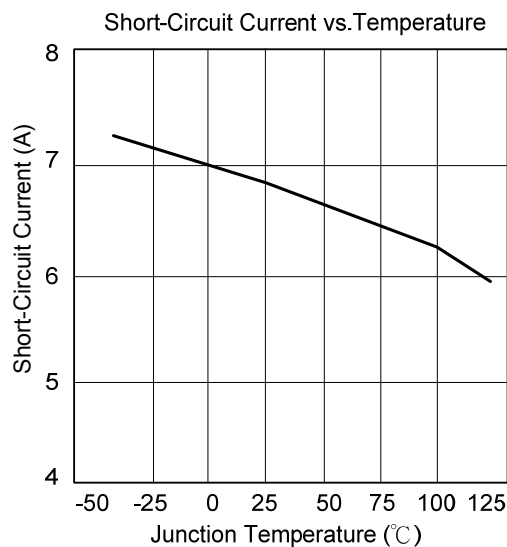

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.