



SR4020PT THRU SR4060PT

40.0 AMPS. Schottky Barrier Rectifiers



Voltage Range
20 to 60 Volts
Current
40.0 Amperes


Features

- ◇ Dual rectifier construction, positive center-tap
- ◇ Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- ◇ Metal silicon junction, majority carrier conduction
- ◇ Low power loss, high efficiency
- ◇ High current capability, low VF
- ◇ High surge capability
- ◇ Epitaxial construction
- ◇ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◇ High temperature soldering guaranteed:
260°C/ 10 seconds, 0.17"(4.3mm)lead lengths at 5 lbs., (2.3kg) tension

Mechanical Data

- ◇ Cases: JEDEC TO-3P/TO-247AD molded plastic
- ◇ Terminals: Leads solderable per MIL-STD-750, Method 2026
- ◇ Polarity: As marked
- ◇ Mounting position: Any
- ◇ Weight: 0.2 ounce, 5.6 grams

TO-3P/TO-247AD

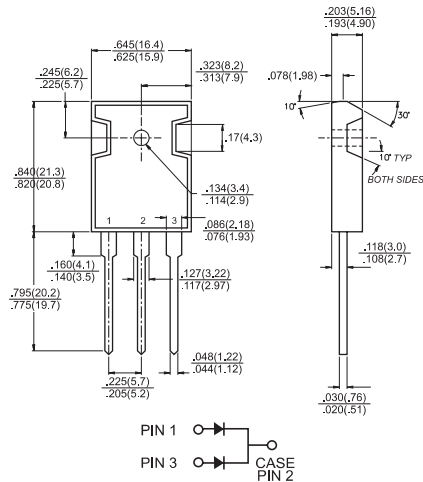

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SR 4020PT	SR 4030PT	SR 4040PT	SR 4050PT	SR 4060PT	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	V
Maximum Average Forward Rectified Current at Tc=100℃	I _(AV)	40					A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	400					A
Maximum Instantaneous Forward Voltage 20.0A (Note 3)	V _F	0.55			0.70		V
Maximum D.C. Reverse Current @ Tc=25℃ at Rated DC Blocking Voltage @ Tc=100℃	I _R	1.0 75					mA mA
Typical Thermal Resistance Per Leg (Note 1)	Rθ _{JC}	1.2					℃/W
Typical Junction Capacitance (Note 2)	C _j	1100			600		pF
Operating Junction Temperature Range	T _J	-65 to +125			-65 to +150		℃
Storage Temperature Range	T _{STG}	-65 to +150					℃

Notes: 1. Thermal Resistance from Junction to Case Per Leg, with Heatsink size (4" x 6" x 0.25") Al-Plate.

2. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.

3. 300 us Pulse Width, 2% Duty Cycle

RATINGS AND CHARACTERISTIC CURVES (SR4020PT THRU SR4060PT)

FIG.1- FORWARD CURRENT DERATING CURVE

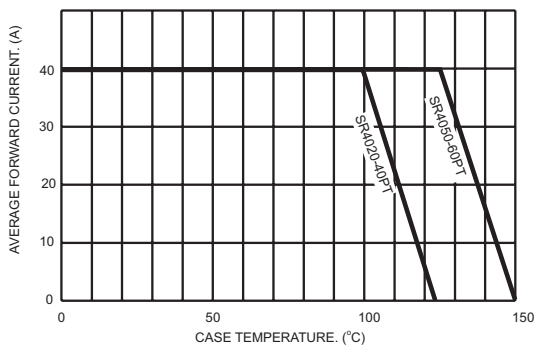


FIG.3- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

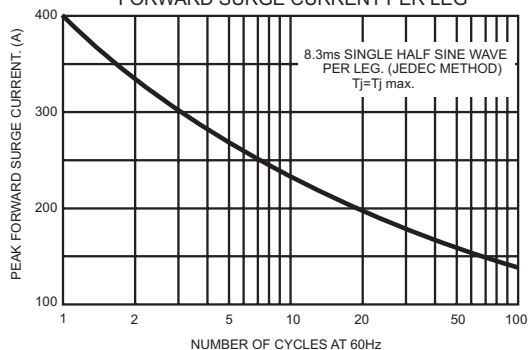


FIG.2- TYPICAL REVERSE CHARACTERISTICS PER LEG

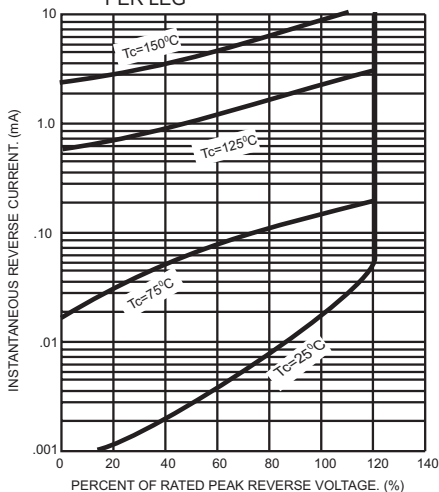


FIG.4- TYPICAL FORWARD CHARACTERISTICS PER LEG

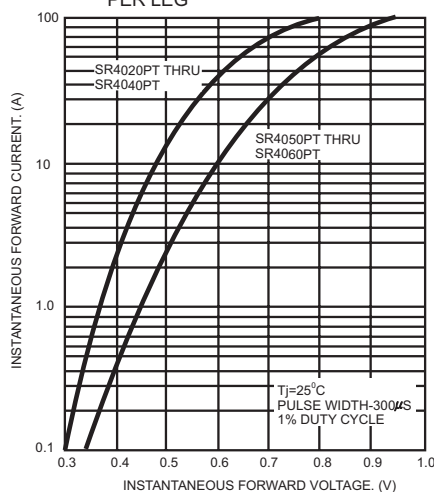


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

