

## APPLICATIONS

- Rectification
- Freewheel Diode
- DC Motor Control
- Power Supplies
- Welding
- Battery Chargers

## FEATURES

- High Surge Capability

## VOLTAGE RATINGS

| Type Number       | Repetitive Peak Reverse Voltage<br>$V_{RRM}$<br>V | Conditions                 |
|-------------------|---------------------------------------------------|----------------------------|
| SV20 20 M or K(R) | 2000                                              | $V_{RSM} = V_{RRM} + 100V$ |
| SV20 14 M or K(R) | 1400                                              |                            |
| SV20 10 M or K(R) | 1000                                              |                            |
| SV20 06 M or K(R) | 600                                               |                            |


Lower voltage grades available.

M for M12 thread. K for 1/2" - 20UNF thread, R for reverse polarity.

Add C to type number for DO8C package.

## KEY PARAMETERS

|             |              |
|-------------|--------------|
| $V_{RRM}$   | <b>2000V</b> |
| $I_{F(AV)}$ | <b>220A</b>  |
| $I_{FSM}$   | <b>4000A</b> |

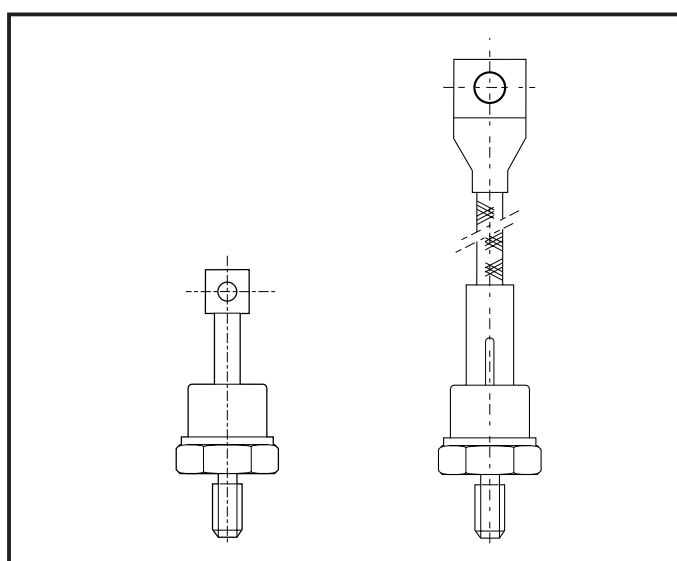

**Outline type codes: DO8C and DO8**  
See Package Details for further information.

## CURRENT RATINGS

| Symbol                    | Parameter                           | Conditions                                          | Max. | Units |
|---------------------------|-------------------------------------|-----------------------------------------------------|------|-------|
| <b>Single Side Cooled</b> |                                     |                                                     |      |       |
| $I_{F(AV)}$               | Mean forward current                | Half wave resistive load, $T_{case} = 100^{\circ}C$ | 220  | A     |
| $I_{F(RMS)}$              | RMS value                           | $T_{case} = 100^{\circ}C$                           | 350  | A     |
| $I_F$                     | Continuous (direct) forward current | $T_{case} = 100^{\circ}C$                           | 297  | A     |

SURGE RATINGS

| Symbol    | Parameter                              | Conditions                                                                   | Max.               | Units            |
|-----------|----------------------------------------|------------------------------------------------------------------------------|--------------------|------------------|
| $I_{FSM}$ | Surge (non-repetitive) forward current | 10ms half sine; $T_{case} = 175^{\circ}C$<br>$V_R = 50\% V_{RRM} - 1/4$ sine | 3.2                | kA               |
| $I^2t$    | $I^2t$ for fusing                      |                                                                              | $51.2 \times 10^3$ | A <sup>2</sup> s |
| $I_{FSM}$ | Surge (non-repetitive) forward current | 10ms half sine; $T_{case} = 175^{\circ}C$<br>$V_R = 0$                       | 4.0                | kA               |
| $I^2t$    | $I^2t$ for fusing                      |                                                                              | $80.0 \times 10^3$ | A <sup>2</sup> s |

THERMAL AND MECHANICAL DATA

| Symbol        | Parameter                             | Conditions                                    | Min. | Max. | Units         |
|---------------|---------------------------------------|-----------------------------------------------|------|------|---------------|
| $R_{th(j-c)}$ | Thermal resistance - junction to case | dc                                            | -    | 0.23 | $^{\circ}C/W$ |
| $R_{th(c-h)}$ | Thermal resistance - case to heatsink | Mounting torque 15.0Nm with mounting compound | -    | 0.08 | $^{\circ}C/W$ |
| $T_{vj}$      | Virtual junction temperature          | Forward (conducting)                          | -    | 175  | $^{\circ}C$   |
|               |                                       | Reverse (blocking)                            | -    | 175  | $^{\circ}C$   |
| $T_{stg}$     | Storage temperature range             |                                               | -55  | 200  | $^{\circ}C$   |
| -             | Mounting Torque                       |                                               | 12.0 | 15.0 | Nm            |

CHARACTERISTICS

| Symbol    | Parameter             | Conditions                                                         | Typ. | Max. | Units      |
|-----------|-----------------------|--------------------------------------------------------------------|------|------|------------|
| $V_{FM}$  | Forward voltage       | At 600A peak, $T_{case} = 25^{\circ}C$                             | -    | 1.4  | V          |
| $I_{RRM}$ | Peak reverse current  | At $V_{RRM}$ , $T_{case} = 175^{\circ}C$                           | -    | 20   | mA         |
| $Q_S$     | Total stored charge   | $I_F = 100A$ , $di_{RR}/dt = 20A/\mu s$ , $T_{case} = 25^{\circ}C$ | 200* | -    | $\mu C$    |
| $I_{RM}$  | Peak recovery current |                                                                    | 70*  | -    | A          |
| $t_{rr}$  | reverse recovery time |                                                                    | 5.5* | -    | $\mu s$    |
| $V_{TO}$  | Threshold voltage     | At $T_{vj} = 175^{\circ}C$                                         | -    | 0.8  | V          |
| $r_T$     | Slope resistance      | At $T_{vj} = 175^{\circ}C$                                         | -    | 1.0  | m $\Omega$ |

\*Typical values.

CURVES

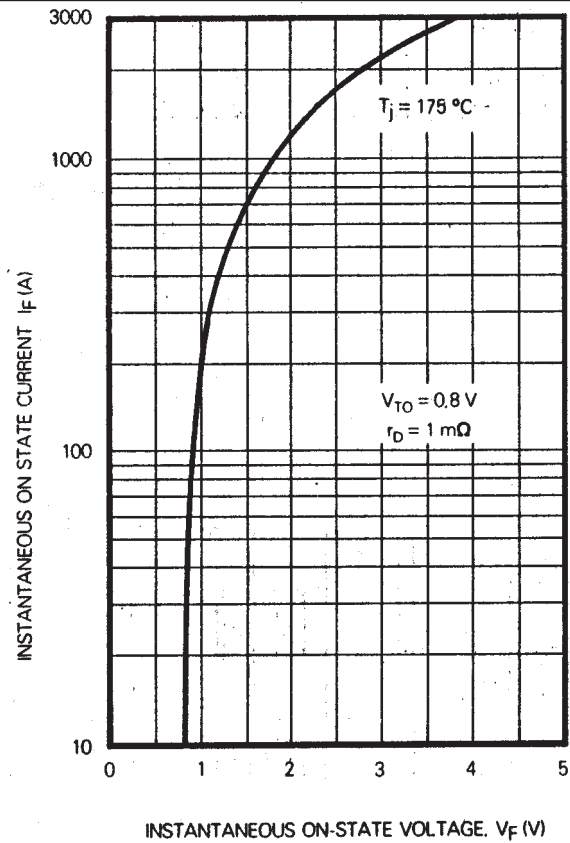


FIG. 1 MAXIMUM (LIMIT) FORWARD CONDUCTION CHARACTERISTIC

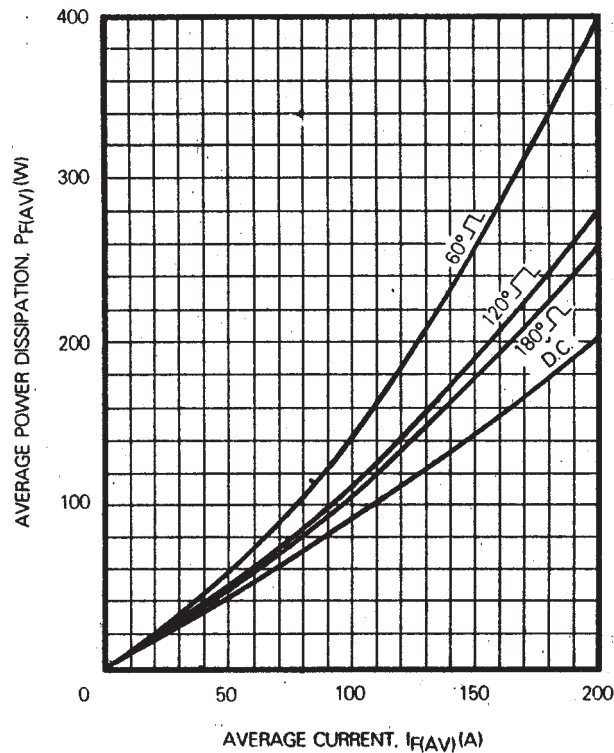


FIG. 2 MAXIMUM FORWARD POWER DISSIPATION

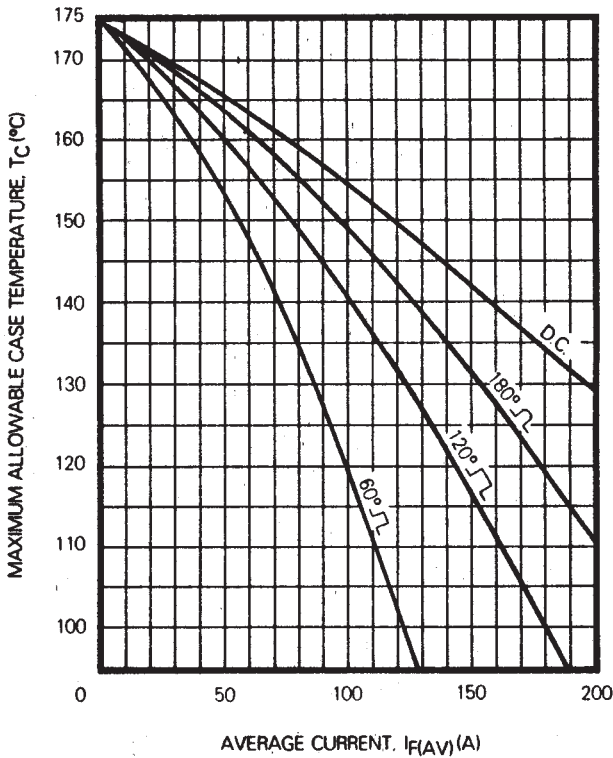


FIG. 3 MAXIMUM ALLOWABLE CASE TEMPERATURE

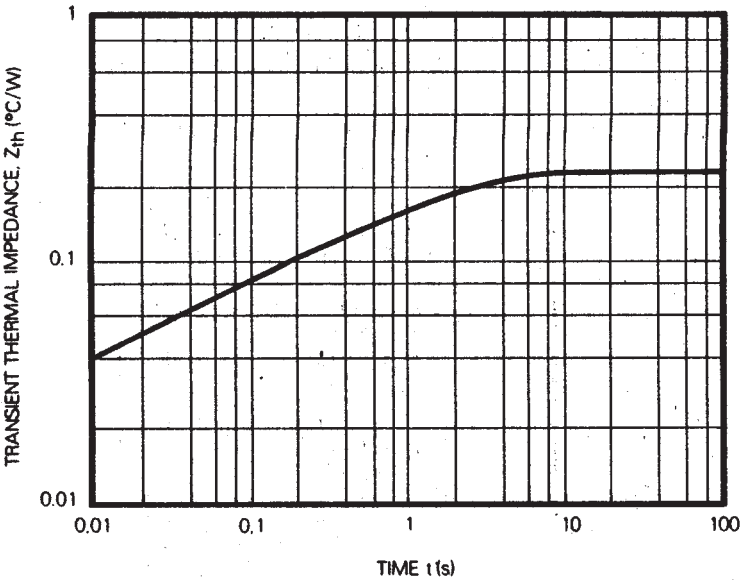


FIG. 4 TRANSIENT THERMAL IMPEDANCE - JUNCTION TO CASE

| Conduction angle | Effective thermal Resistance ( $^{\circ}\text{C/W}$ )<br>Junction to case |             |
|------------------|---------------------------------------------------------------------------|-------------|
|                  | Sinusoidal                                                                | Rectangular |
| $180^{\circ}$    | 0.248                                                                     | 0.276       |
| $120^{\circ}$    | 0.258                                                                     | 0.311       |
| $60^{\circ}$     | 0.299                                                                     | 0.391       |

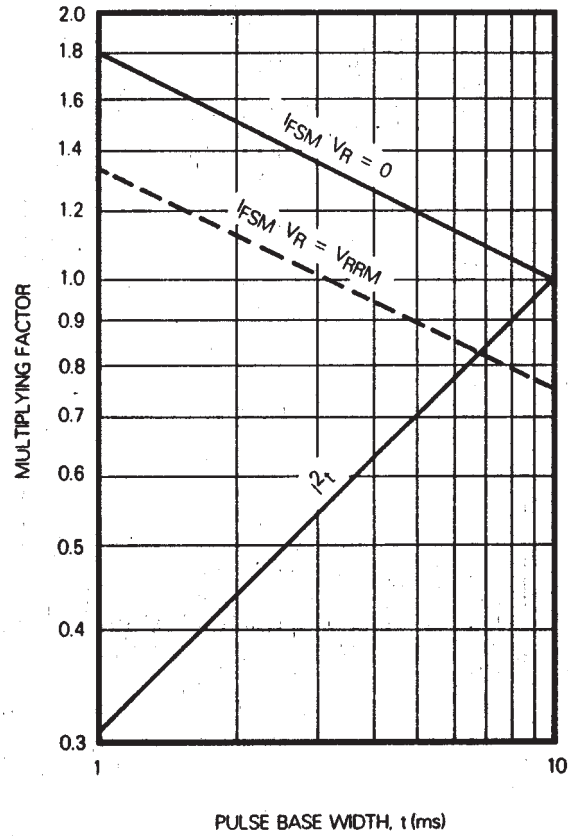


FIG. 5 MULTIPLYING FACTOR FOR  
NON-REPETITIVE SUB-CYCLE FORWARD  
CURRENT AND  $I^2t$  RATING


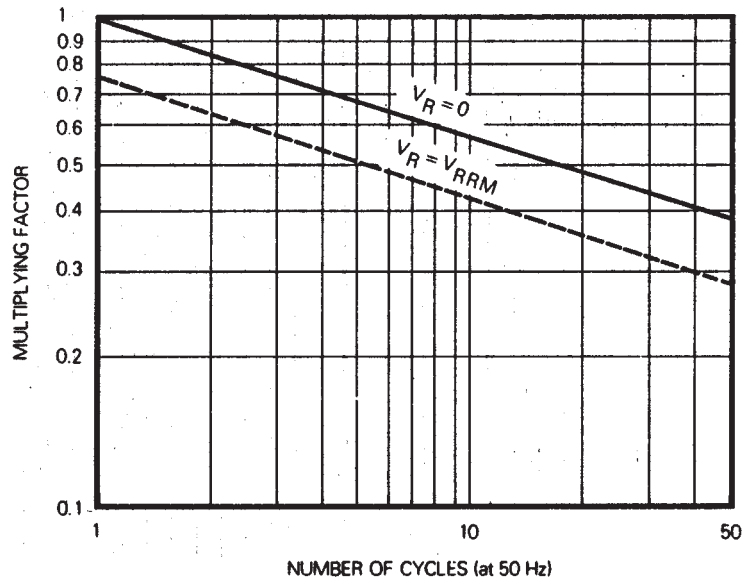


FIG. 6 MULTIPLYING FACTOR FOR NON-REPETITIVE  
FORWARD CURRENT

SV20

PACKAGE DETAILS

For further package information, please contact your local Customer Service Centre. All dimensions in mm, unless stated otherwise. DO NOT SCALE.

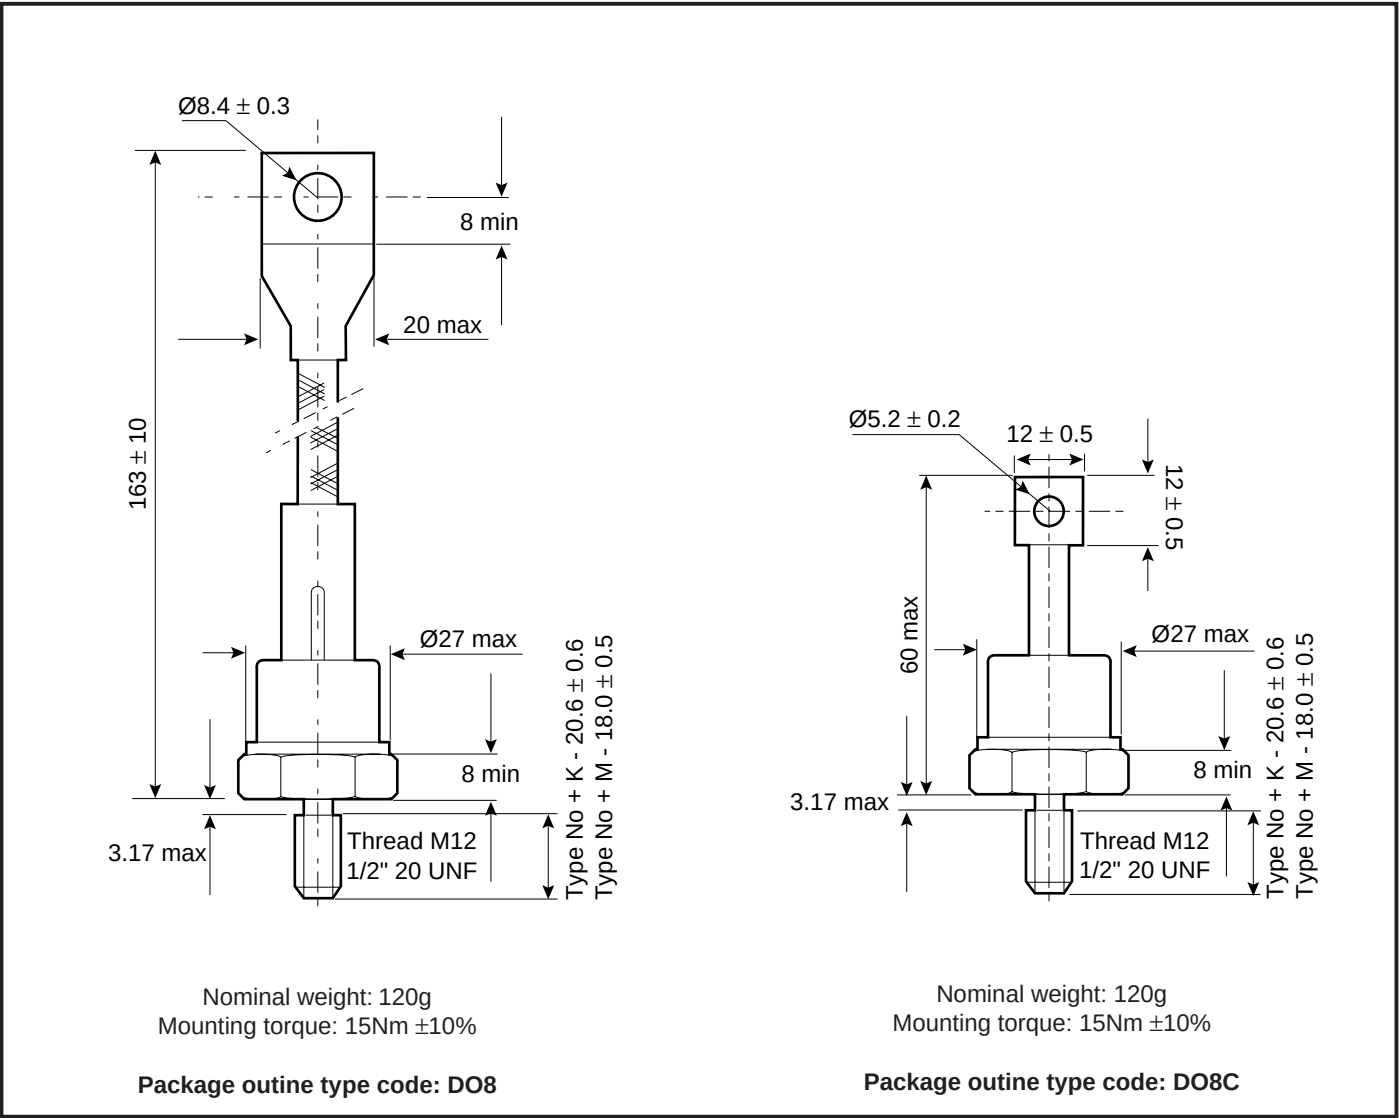

ASSOCIATED PUBLICATIONS

| Title                                                        | Application Note |
|--------------------------------------------------------------|------------------|
|                                                              | Number           |
| Calculating the junction temperature or power semiconductors | AN4506           |
| Thyristor and diode measurement with a multi-meter           | AN4853           |
| Use of $V_{TO}$ , $r_T$ on-state characteristic              | AN5001           |

## POWER ASSEMBLY CAPABILITY

The Power Assembly group was set up to provide a support service for those customers requiring more than the basic semiconductor, and has developed a flexible range of heatsink / clamping systems in line with advances in device types and the voltage and current capability of our semiconductors.

We offer an extensive range of air and liquid cooled assemblies covering the full range of circuit designs in general use today. The Assembly group continues to offer high quality engineering support dedicated to designing new units to satisfy the growing needs of our customers.

Using the up to date CAD methods our team of design and applications engineers aim to provide the Power Assembly Complete solution (PACs).

## HEATSINKS

Power Assembly has its own proprietary range of extruded aluminium heatsinks. They have been designed to optimise the performance of our semiconductors. Data with respect to air natural, forced air and liquid cooling (with flow rates) is available on request.

For further information on device clamps, heatsinks and assemblies, please contact your nearest Sales Representative or the factory.



<http://www.dynexsemi.com>

e-mail: [power\\_solutions@dynexsemi.com](mailto:power_solutions@dynexsemi.com)

**HEADQUARTERS OPERATIONS**  
**DYNEX SEMICONDUCTOR LTD**  
 Doddington Road, Lincoln.  
 Lincolnshire. LN6 3LF. United Kingdom.  
 Tel: 00-44-(0)1522-500500  
 Fax: 00-44-(0)1522-500550

**DYNEX POWER INC.**  
 Unit 7 - 58 Antares Drive,  
 Nepean, Ontario, Canada K2E 7W6.  
 Tel: 613.723.7035  
 Fax: 613.723.1518  
 Toll Free: 1.888.33.DYNEX (39639)

**CUSTOMER SERVICE CENTRES**  
**France, Benelux, Italy and Spain** Tel: +33 (0)1 69 18 90 00. Fax: +33 (0)1 64 46 54 50  
**North America** Tel: 011-800-5554-5554. Fax: 011-800-5444-5444  
**UK, Germany, Scandinavia & Rest Of World** Tel: +44 (0)1522 500500. Fax: +44 (0)1522 500020

**SALES OFFICES**  
**France, Benelux, Italy and Spain** Tel: +33 (0)1 69 18 90 00. Fax: +33 (0)1 64 46 54 50  
**Germany** Tel: 07351 827723  
**North America** Tel: (613) 723-7035. Fax: (613) 723-1518. Toll Free: 1.888.33.DYNEX (39639) /  
 Tel: (831) 440-1988. Fax: (831) 440-1989 / Tel: (949) 733-3005. Fax: (949) 733-2986.  
**UK, Germany, Scandinavia & Rest Of World** Tel: +44 (0)1522 500500. Fax: +44 (0)1522 500020  
 These offices are supported by Representatives and Distributors in many countries world-wide.  
 © Dynex Semiconductor 2000 Publication No. DS4085-3 Issue No. 3.0 January 2000  
 TECHNICAL DOCUMENTATION – NOT FOR RESALE. PRINTED IN UNITED KINGDOM

### Datasheet Annotations:

Dynex Semiconductor annotate datasheets in the top right hand corner of the front page, to indicate product status. The annotations are as follows:-

**Target Information:** This is the most tentative form of information and represents a very preliminary specification. No actual design work on the product has been started.

**Preliminary Information:** The product is in design and development. The datasheet represents the product as it is understood but details may change.

**Advance Information:** The product design is complete and final characterisation for volume production is well in hand.

**No Annotation:** The product parameters are fixed and the product is available to datasheet specification.

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.

All brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.