


FEATURES

- Max. propagation delay of 900ps
- IEE min. of -92mA
- Industry standard 100K ECL levels
- Extended supply voltage option:
VEE = -4.2V to -5.5V
- Voltage and temperature compensation for improved noise immunity
- Internal 75KΩ input pull-down resistors
- 60% faster than Fairchild 300K at lower power
- Function and pinout compatible with Fairchild F100K
- Available in 24-pin CERPAC and 28-pin PLCC packages



BLOCK DIAGRAM

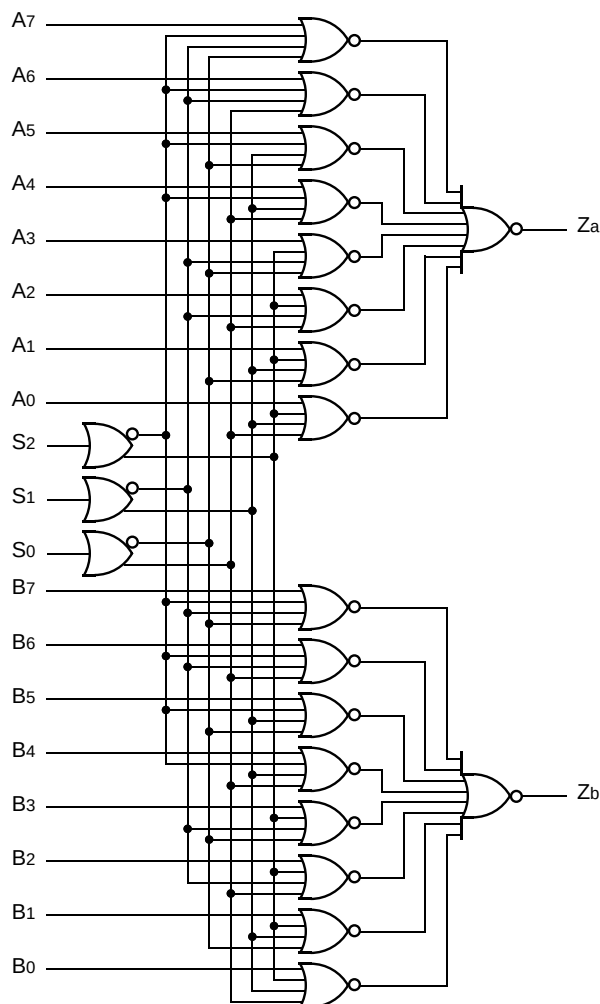

DESCRIPTION

The SY100S363 is a dual 8-input multiplexer designed for use in new, high-performance ECL systems. The three Data Select inputs (S₀, S₁, S₂) determine the bits from each of the inputs (A_n, B_n) that will be passed on through the two outputs. The same bit will be selected from the two groups of 8 inputs. The inputs on this device have 75KΩ pull-down resistors.

PIN CONFIGURATIONS

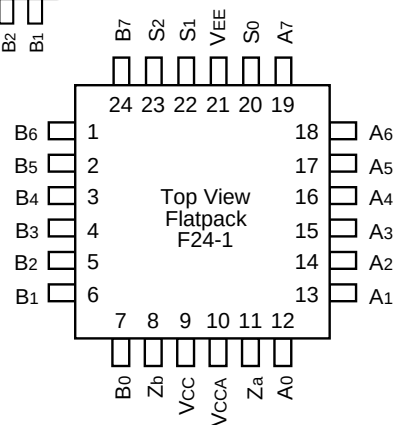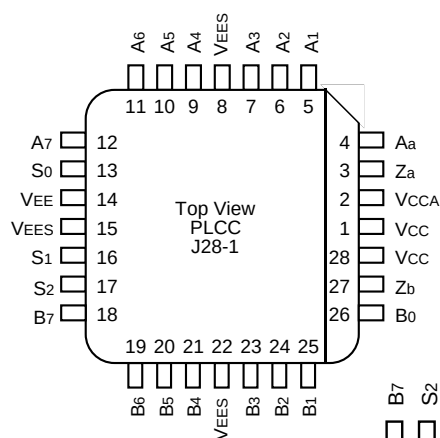

PIN NAMES

Pin	Function
S ₀ – S ₂	Data Select Inputs
A ₀ – A ₇	A Data Inputs
B ₀ – B ₇	B Data Inputs
Z _a , Z _b	Data Outputs
VEES	VEE Substrate
VCCA	Vcco for ECL Outputs

TRUTH TABLE⁽¹⁾

Inputs											Outputs
Select			Data								
S2	S1	S0	A7/B7	A6/B6	A5/B5	A4/B4	A3/B3	A2/B2	A1/B1	A0/B0	Za/Zb
L L	L L	L L								L H	L H
L L	L L	H H							L H		L H
L L	H H	L L						L H			L H
L L	H H	H H					L H				L H
H H	L L	L L				L H					L H
H H	L L	H H			L H						L H
H H	H H	L L		L H							L H
H H	H H	H H	L H								L H

NOTE:

1. H = HIGH Voltage Level

L = LOW Voltage Level

Blank = X = Don't Care

DC ELECTRICAL CHARACTERISTICS

$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
I_{IH}	Input HIGH Current S_n A_n, B_n	— —	— —	200 200	μA	$V_{IN} = V_{IH} (Max.)$
I_{EE}	Power Supply Current	-92	-66	-45	mA	Inputs Open

AC ELECTRICAL CHARACTERISTICS

CERPACK

$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$


Symbol	Parameter	$T_A = 0^\circ C$		$T_A = +25^\circ C$		$T_A = +85^\circ C$		Unit	Condition
		Min.	Max.	Min.	Max.	Min.	Max.		
t_{PLH} t_{PHL}	Propagation Delay $A_0 - A_7, B_0 - B_7$ to Output	300	1000	300	1000	300	1000	ps	
t_{PLH} t_{PHL}	Propagation Delay $S_0 - S_2$ to Output	400	1400	400	1400	400	1400	ps	
t_{TLH} t_{THL}	Transition Time 20% to 80%, 80% to 20%	300	1000	300	1000	300	1000	ps	

PLCC

$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	$T_A = 0^\circ C$		$T_A = +25^\circ C$		$T_A = +85^\circ C$		Unit	Condition
		Min.	Max.	Min.	Max.	Min.	Max.		
t_{PLH} t_{PHL}	Propagation Delay $A_0 - A_7, B_0 - B_7$ to Output	300	900	300	900	300	900	ps	
t_{PLH} t_{PHL}	Propagation Delay $S_0 - S_2$ to Output	400	1300	400	1300	400	1300	ps	
t_{TLH} t_{THL}	Transition Time 20% to 80%, 80% to 20%	300	900	300	900	300	900	ps	

TIMING DIAGRAM

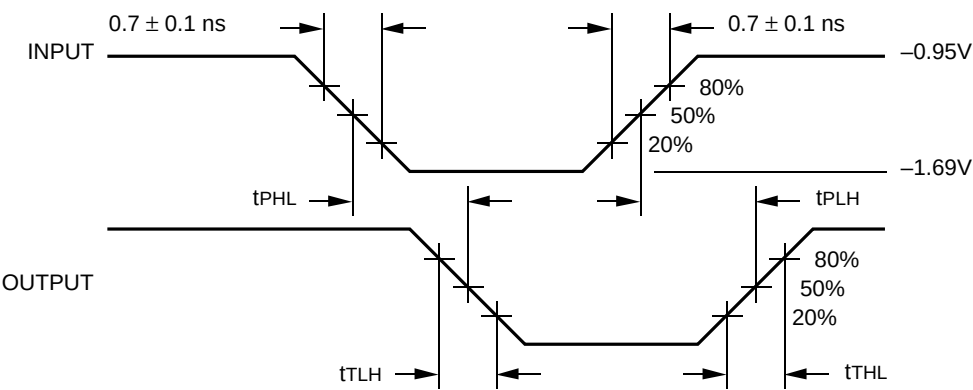


Propagation Delay and Transition Times

NOTE:
V_{EE} = -4.2V to -5.5V unless otherwise specified; V_{CC} = V_{CCA} = GND

PRODUCT ORDERING CODE

Ordering Code	Package Type	Operating Range
SY100S363FC	F24-1	Commercial
SY100S363JC	J28-1	Commercial
SY100S363JCTR	J28-1	Commercial

24 LEAD CERPACK (F24-1)

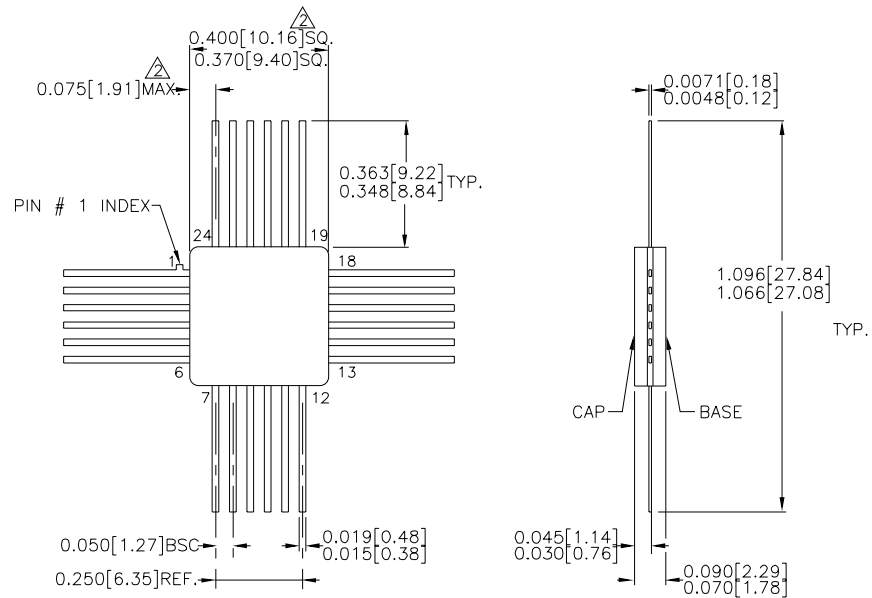


NOTES:

1. DIMENSIONS ARE IN INCHES[MM].
2. THIS DIMENSION INCLUDES GLASS PROTRUSION AND CAP TO BASE ALIGNMENT TOLERANCES.
3. DIMENSIONS SHOWN ARE MAX/MIN, WHERE NOTED.

Rev. 03

28 LEAD PLCC (J28-1)

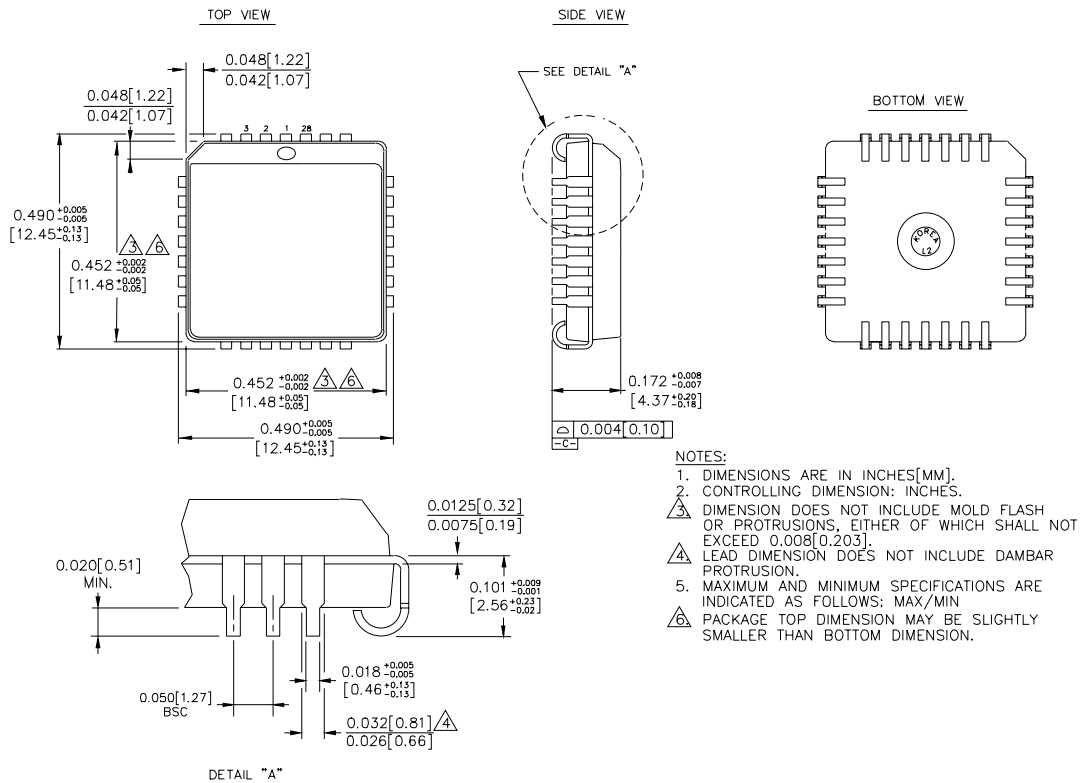

Rev. 03

MICREL-SYNERGY 3250 SCOTT BOULEVARD SANTA CLARA CA 95054 USA

TEL + 1 (408) 980-9191 FAX + 1 (408) 914-7878 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated