


ZTB Series

- Fast Delivery
- Tape & Reel or Bulk Packaging
- Highly Competitive Prices for Volume Users



Series	Frequency Range	Frequency Tolerance	ESR	Temperature Tolerance	Aging
ZTB---D	190 -249kHz	+/- 1.0kHz	20Ω	+/- 0.3%	+/- 0.5%
ZTB---D	250 -374kHz	+/- 1.0kHz	20Ω	+/- 0.3%	+/- 0.5%
ZTB---P	375 -429kHz	+/- 2.0kHz	20Ω	+/- 0.3%	+/- 0.5%
ZTB---E	430 -449kHz	+/- 2.0kHz	20Ω	+/- 0.3%	+/- 0.5%
ZTB---E	450 -509kHz	+/- 2.0kHz	20Ω	+/- 0.3%	+/- 0.5%
ZTB---P	510 -699kHz	+/- 2.0kHz	35Ω	+/- 0.3%	+/- 0.5%
ZTB---J	700 -999kHz	+/- 0.5%	70Ω	+/- 0.3%	+/- 0.5%
ZTB---MJ	1.0 – 1.25MHz	+/- 0.5%	100Ω	+/- 0.3%	+/- 0.5%

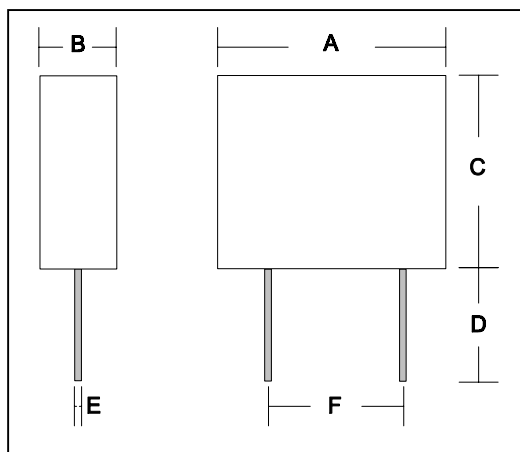

Series	A	B	C	D	E	F
ZTB	7.00	3.50	9.00	4.00	0.15	5.00

Dimensions in mm