

# Digital CCD Camera C4880-20



▲ Hermetic vacuum sealed air-cooled head type


This camera system is equipped with a CCD manufactured by Hamamatsu. It offers a wide dynamic range due to the large cell size ( $24\ \mu\text{m} \times 24\ \mu\text{m}$ ) and the extremely large quantity of full well capacity.

Furthermore, the use of the MPP (Multi-Pin Phasing) low dark current drive method has reduced the dark current.

## APPLICATIONS


- X-ray scintillator readout
- Readout of various fluorescences
- X-ray diffraction readout
- Neutron radiography

## SYSTEM CONFIGURATION

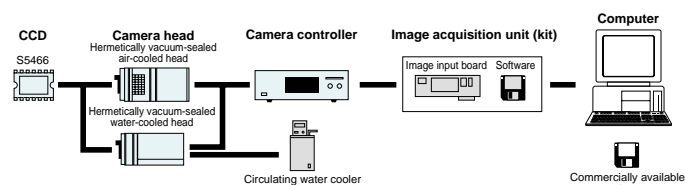

▲ Hermetic vacuum sealed water-cooled head type

## SPECTRAL RESPONSE CHARACTERISTICS

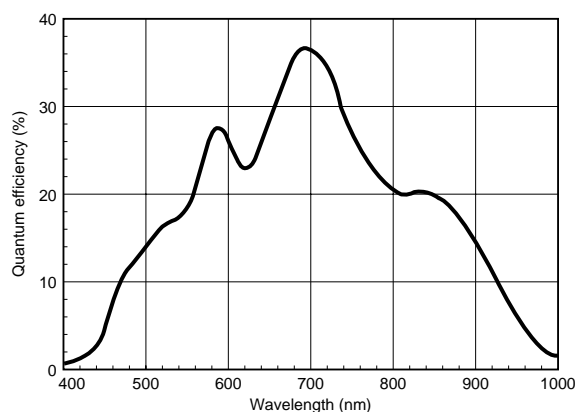

\* This is typical, not guaranteed.

## FEATURES

- Wide dynamic range of 25,000 : 1 (typ.)
- Extremely large full well capacity of 300,000 electrons (typ.)
- Low readout noise of 12 electrons r.m.s. (typ.)
- Low dark current
- Large effective area of 12.29 (H)  $\times$  12.29 (V) mm
- High resolution of 512 (H)  $\times$  512 (V) pixels

## TYPE NO.

C4880-20-□□□

Bit number on A/D converter

- 22: Fast scan mode 12-bit  
High precision scan mode 12-bit
- 24: Fast scan mode 12-bit  
High precision scan mode 14-bit
- 26: Fast scan mode 12-bit  
High precision scan mode 16-bit

Cooling method


- A: Air-cooling
- W: Water-cooling

## SPECIFICATIONS


Model name	C4880-20-□□-A	C4880-20-□□-W
Camera head type	Hermetically vacuum-sealed air-cooled head	Hermetically vacuum-sealed water-cooled head
Circulating water cooler	—	Required
Vacuum pump	—	—
Imaging device	S5466 Model 1 full-frame transfer CCD	
Effective no. of pixels	512 (H) × 512 (V)	
Cell size	24 (H) × 24 (V) μm	
Effective area	12.29 (H) × 12.29 (V) mm	
Readout noise (High-precision scan mode)	Min. Typ.	8 electrons r.m.s. 12 electrons r.m.s.
Full well capacity	300,000 electrons	
Dynamic range (High-precision scan mode)	Typ. Max.	25,000 : 1 30,000 : 1
Frame rate	High-precision scan mode Fast scan mode	0.5 frames/sec (156 kHz/pixel) 7 frames/sec (2.5 MHz/pixel)
Cooling method	Peltier cooling / forced-air cooling + hermetic sealing	Peltier cooling / water cooling + hermetic sealing
Cooling temperature	-45 to -55 °C	-60 to -70 °C
CCD cooling control	Cooling ON/OFF control, cooling temperature setting function Front panel dial / software-controlled switching; Temperature displayed on front panel LCD	
Dark current	3.0 electrons/pixel/sec	1.5 electrons/pixel/sec
Exposure time	20 ms or more	
A/D converter	12 / 14 / 16 bits	
Lens mount	C-mount	
Mechanical shutter	Built-in (Control: OPEN / CLOSE / AUTO)	
Variable analog gain	Front panel dial / software-controlled switching, 1 - 6 times (high-speed scan)	
Variable offset	Front panel dial / software-controlled switching (fast scan)	
Amp gain	2 steps (fast scan), 3 steps (precision scan)	
Binning scan	Yes	
Sub-array scan	1/1, 1/2, 1/4, 1/8 (H) × any desired number (V)	
Super-pixel scan	2 × 2, 4 × 4, 8 × 8	
External trigger input	Yes	
Output signal (digital output)	Parallel digital output (conforms to RS-422)	
External control	RS-232C	
Ambient storage temperature	-10 to +50 °C	
Ambient operating temperature	0 °C to +40 °C	
Ambient operating/storage humidity	70% max. (with no condensation)	
Line voltage	100 / 117 / 220 / 240 VAC, 50/60 Hz	
Power consumption	Approx. 220 VA	

## DIMENSIONAL OUTLINES


- Hermetic vacuum sealed air-cooled head (approx. 2.5 kg)

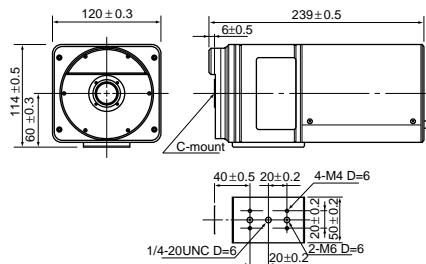


- Camera controller (approx. 8.5 kg)

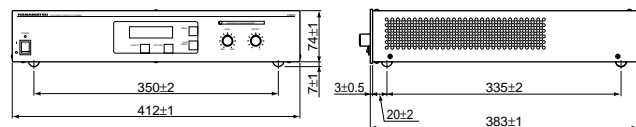

- Hermetic vacuum sealed water-cooled head (approx. 2.5kg)

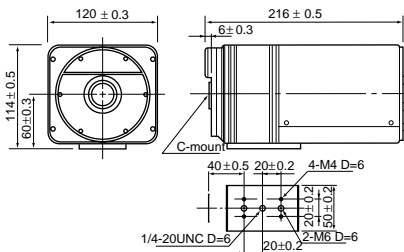

- Camera controller (approx. 8.5 kg)

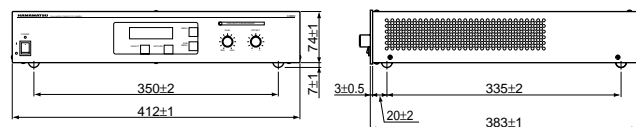

- ★ Product and software package names noted in this documentation are trademarks or registered trademarks of their respective manufacturers.
- Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office
- Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions.

Specifications and external appearance are subject to change without notice.

© 2002 Hamamatsu Photonics K.K.

# HAMAMATSU

Homepage Address <http://www.hamamatsu.com>

HAMAMATSU PHOTONICS K.K., Systems Division  
812 Joko-cho, Hamamatsu City, 431-3196, Japan, Telephone: (81)53-431-0124, Fax: (81)53-435-1574, E-mail: [export@sys.hpk.co.jp](mailto:export@sys.hpk.co.jp)

U.S.A. and Canada: Hamamatsu Photonic Systems: 360 Foothill Road, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-1116, Fax: (1)908-231-0852, E-mail: [usa@hamamatsu.com](mailto:usa@hamamatsu.com)

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658, E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10, E-mail: [infos@hamamatsu.fr](mailto:infos@hamamatsu.fr)

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road Welwyn Garden City Hertfordshire AL7 1BW U.K., Telephone: (44) 1707-294888, Fax: (44) 1701-325777, E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 Solna, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01, E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Mois, 1/E 20020 Arese (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741, E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

Cat. No. SIC51079E02  
MAR/2002 HPK  
Created in Japan (PDF)