


Series 310 / 410


PCB connectors 2.54 mm
Single row / double row
Solder tail

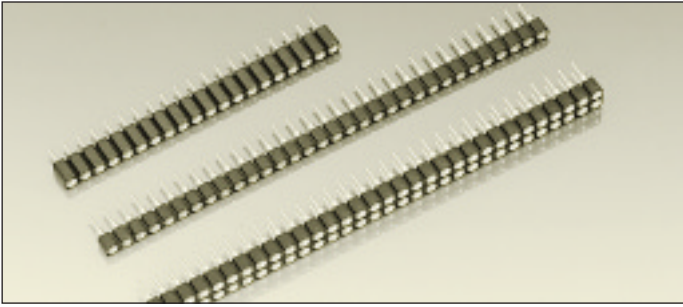

Receptacles, solder tail

Accept pins $\varnothing$ 0.40–0.56 mm


For corresponding pin connectors see pages 43 to 46



Ordering information

Replace **xx** with the number of poles, e.g. 410-91-2**xx**-41-001 for a double row version with 8 pins per row becomes:
410-91-2**16**-41-001

Platings	Sleeve 	Clip 	Pin 
13	0.25 μ m Au	0.75 μ m Au	
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
97	5 μ m Sn Pb	Goldflash	
99	5 μ m Sn Pb	5 μ m Sn Pb	

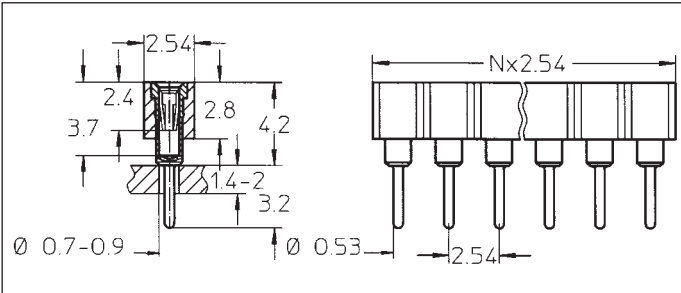

310-13-1xx-41-001 **B**

310-91-1xx-41-001


310-93-1xx-41-001

310-97-1xx-41-001

310-99-1xx-41-001

Straight receptacle: solder tail, single row

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

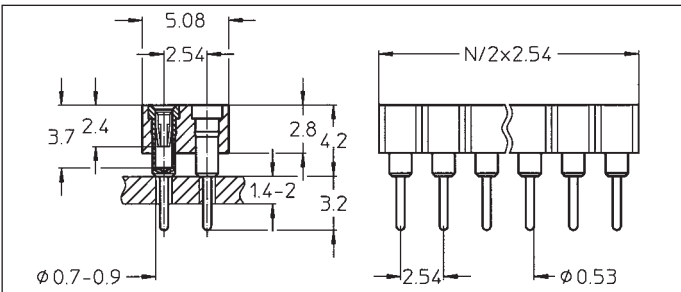

410-13-2xx-41-001 **B**

410-91-2xx-41-001


410-93-2xx-41-001

410-97-2xx-41-001

410-99-2xx-41-001

Straight receptacle: solder tail, double row

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72

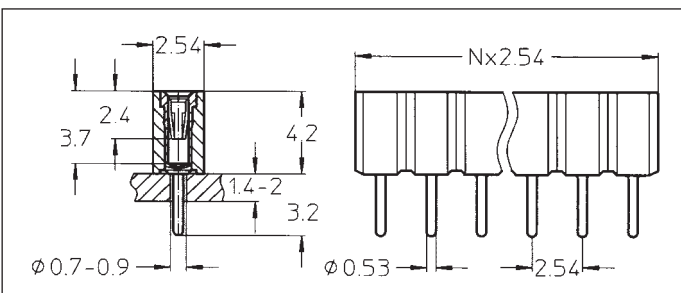

310-91-1xx-01-640

310-93-1xx-01-640

310-97-1xx-01-640


310-99-1xx-01-640

Straight receptacle: solder tail, single row, with standoff

Availability from: 1 to 32 contacts
Standard number of contacts 14, 20, 32

Option

On request double and triple row

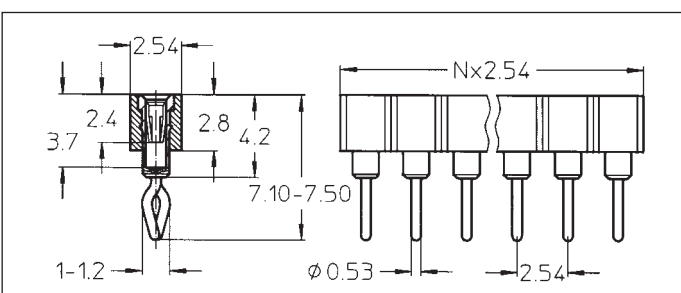

310-91-1xx-01-666

310-93-1xx-01-666

310-97-1xx-01-666

310-99-1xx-01-666

Straight receptacle: with clinched (right/left) solder tails, single row

Availability from: 3 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64