

[illegible]



Isolation Voltage: 1500 Vrms (INPUT to OUTPUT)
Isolation Voltage: 500 Vrms (6+7+8-2+3+4)
TURNS RATIO: TX 1CT:1 ±5% RX 1CT:1CT ±5%
OCL: 350uH Minimum @100KHz 100mV 8mADC
Insertion Loss (300KHz-100MHz): -1.0dB Typical
Return Loss: 30MHz -16dB Typical
60MHz -12dB Typical
80MHz -10dB Typical
CROSSTALK: 32MHz -40dB Minimum
62MHz -35dB Minimum
100MHz -35dB Minimum

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C




PRELIMINARY

XFMRS Inc.		Title: TWO PORTS COMBO	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch SHEET 1 OF 2	P/N: XFATM6-COMBO2-4S		REV. A
	DWN.	廖玉坤	May-10-02
	CHK.	李清儿	May-10-02
	APP.	BW	May-10-02

Mechanical Dimensions: (FOR COMB02-4S)

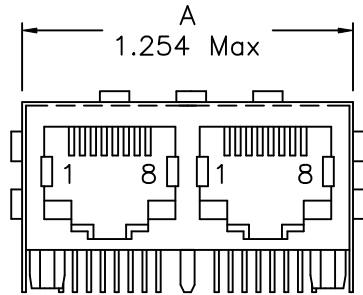

TOP VIEW

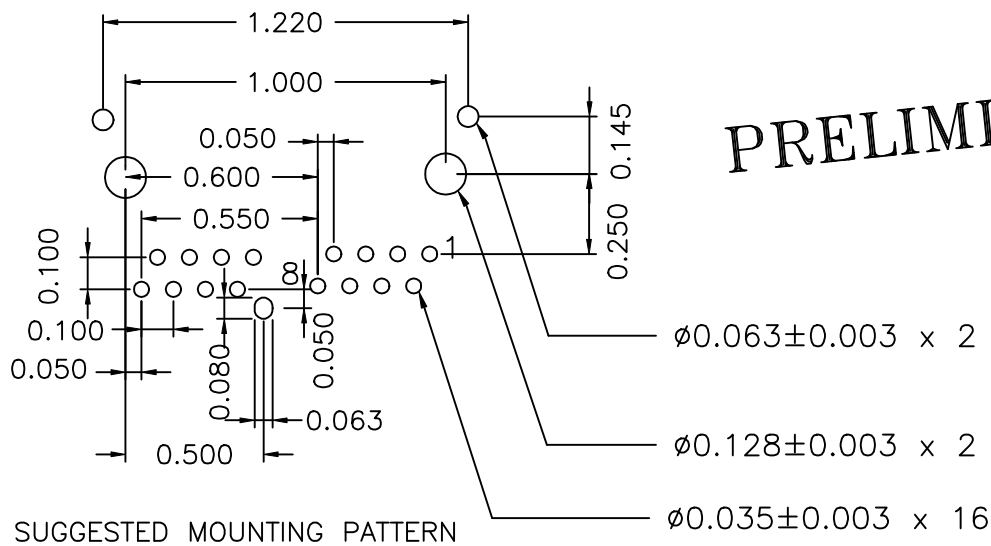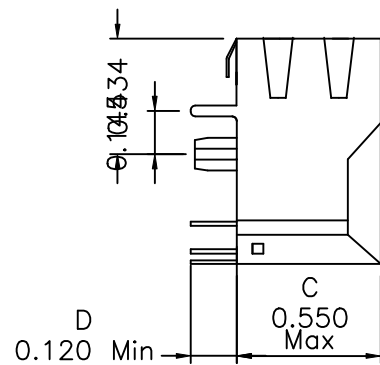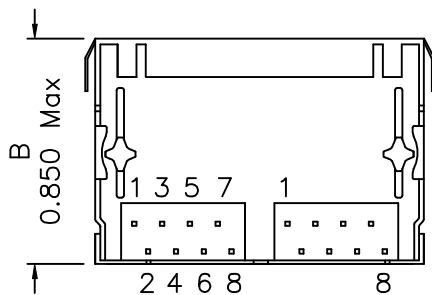

PRELIMINARY

XFMRS Inc.

Title: Mechanical Dimensions
For COMB02-4S Series

UNLESS OTHERWISE SPECIFIED
TOLERANCES:
.xxx ±0.010
Dimensions in Inch

P/N: XFATM6-COMB02-4S

REV. A

DWN.

李小锋

May-10-02

CHK.

廖玉坤

May-10-02

APP.

BW

May-10-02

DOC REV: A/1

SHEET 2 OF 2