

# DATA SHEET



## **PCA9540B** 2-channel I<sup>2</sup>C multiplexer

Product data sheet  
Supersedes data of 2004 Apr 13


2004 Sep 29

## 2-channel I<sup>2</sup>C multiplexer

PCA9540B

### FEATURES

- 1-of-2 bi-directional translating multiplexer
- I<sup>2</sup>C interface logic; compatible with SMBus standards
- Channel selection via I<sup>2</sup>C-bus
- Power up with all multiplexer channels deselected
- Low R<sub>DS(ON)</sub> switches
- Allows voltage level translation between 1.8 V, 2.5 V, 3.3 V and 5 V buses
- No glitch on power-up
- Supports hot insertion
- Low stand-by current
- Operating power supply voltage range of 2.3 V to 5.5 V
- 5 V tolerant Inputs
- 0 to 400 kHz clock frequency
- ESD protection exceeds 2000 V HBM per JESD22-A114, 200 V MM per JESD22-A115 and 1000 V per JESD22-C101
- Latch-up testing is done to JESDEC Standard JESD78 which exceeds 100 mA
- Packages Offered: SO8, TSSOP8



### PIN CONFIGURATION

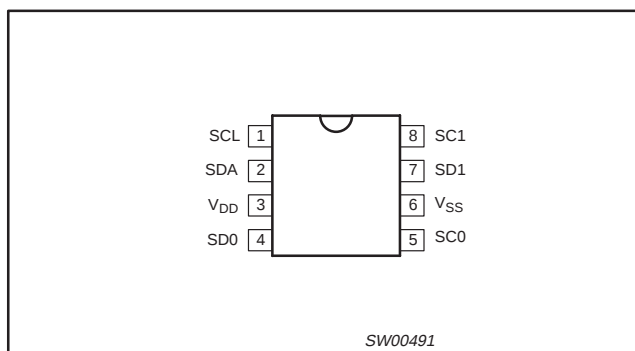


Figure 1. Pin configuration

### DESCRIPTION

The PCA9540B is a 1-of-2 bi-directional translating multiplexer, controlled via the I<sup>2</sup>C-bus. The SCL/SDA upstream pair fans out to two SCx/SDx downstream pairs, or channels. Only one SCx/SDx channel is selected at a time, determined by the contents of the programmable control register.

A power-on reset function puts the registers in their default state and initializes the I<sup>2</sup>C state machine with no channels selected.

The pass gates of the multiplexer are constructed such that the V<sub>DD</sub> pin can be used to limit the maximum high voltage which will be passed by the PCA9540B. This allows the use of different bus voltages on each SCx/SDx pair, so that 1.8 V, 2.5, or 3.3 V parts can communicate with 5 V parts without any additional protection. External pull-up resistors can pull the bus up to the desired voltage level for this channel. All I/O pins are 5 V tolerant.

The PCA9540B has replaced the PCA9540 and all designs must migrate to the PCA9540B. PCA9540B samples can be requested from [www.philipslogic.com/products/I2Cmuxes/](http://www.philipslogic.com/products/I2Cmuxes/).

### PIN DESCRIPTION

| PIN NUMBER | SYMBOL          | FUNCTION          |
|------------|-----------------|-------------------|
| 1          | SCL             | Serial clock line |
| 2          | SDA             | Serial data line  |
| 3          | V <sub>DD</sub> | Supply voltage    |
| 4          | SD0             | Serial data 0     |
| 5          | SC0             | Serial clock 0    |
| 6          | V <sub>SS</sub> | Supply ground     |
| 7          | SD1             | Serial data 1     |
| 8          | SC1             | Serial clock 1    |

### ORDERING INFORMATION

| PACKAGES            | TEMPERATURE RANGE | ORDER CODE | TOPSIDE MARK | DRAWING NUMBER |
|---------------------|-------------------|------------|--------------|----------------|
| 8-Pin Plastic SO    | −40 °C to +85 °C  | PCA9540BD  | PA9540B      | SOT96-1        |
| 8-Pin Plastic TSSOP | −40 °C to +85 °C  | PCA9540BDP | 9540B        | SOT505-1       |

Standard packing quantities and other packaging data are available at [www.standardproducts.philips.com/packaging](http://www.standardproducts.philips.com/packaging).

2-channel I<sup>2</sup>C multiplexer

PCA9540B

## BLOCK DIAGRAM

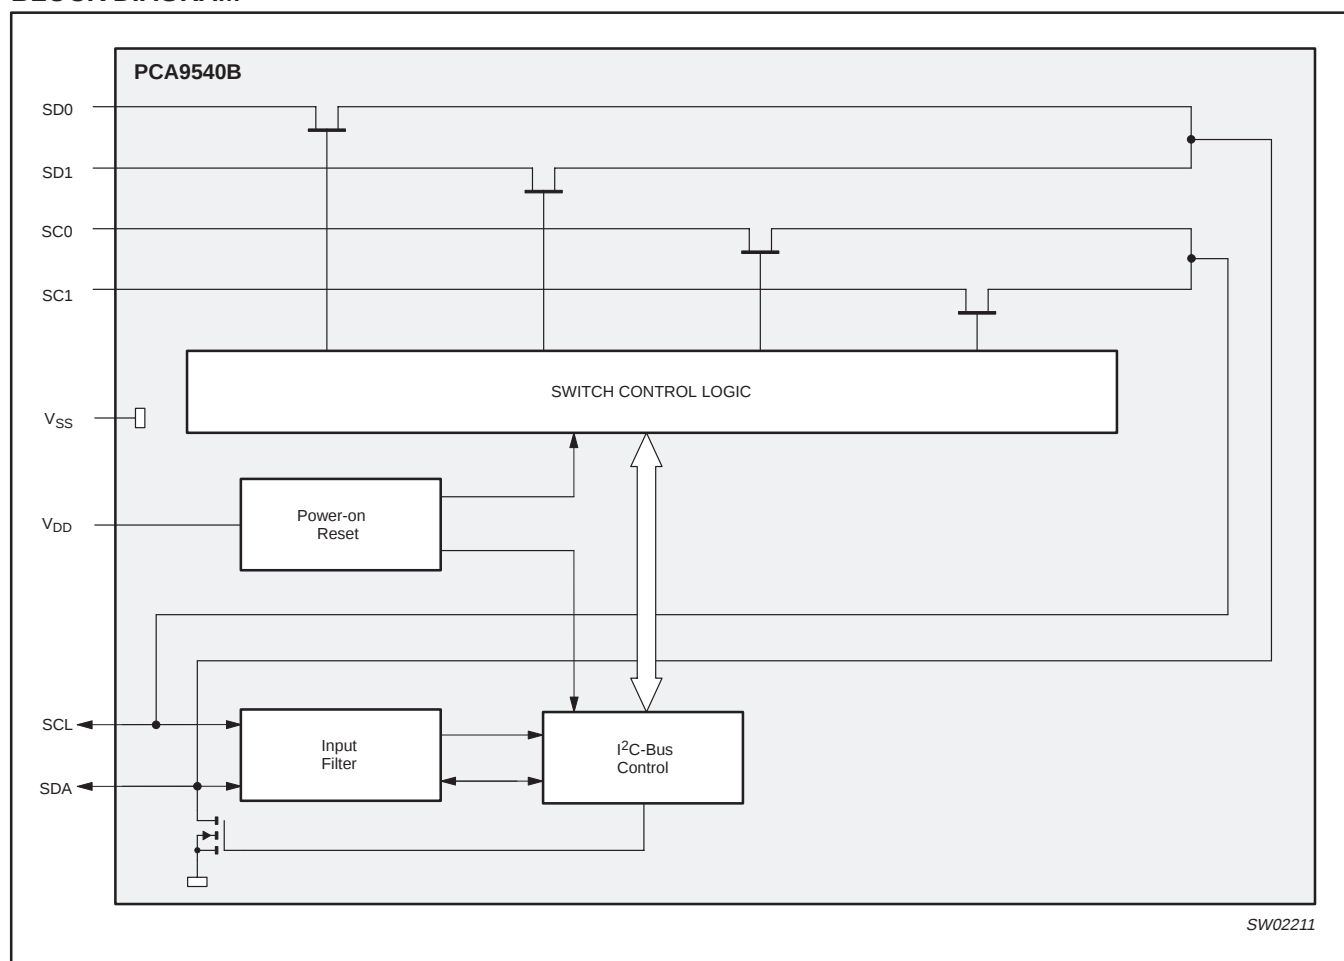


Figure 2. Block diagram

2-channel I<sup>2</sup>C multiplexer

PCA9540B

DEVICE ADDRESSING

Following a START condition the bus master must output the address of the slave it is accessing. The address of the PCA9540B is shown in Figure 3.

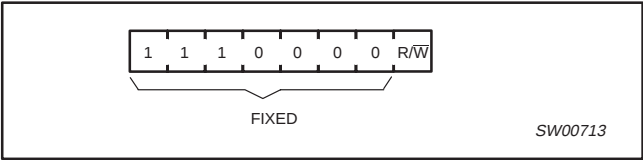


Figure 3. Slave address

The last bit of the slave address defines the operation to be performed. When set to logic 1, a read is selected while a logic 0 selects a write operation.

CONTROL REGISTER

Following the successful acknowledgement of the slave address, the bus master will send a byte to the PCA9540B which will be stored in the Control Register. If multiple bytes are received by the PCA9540B, it will save the last byte received. This register can be written and read via the I<sup>2</sup>C bus.

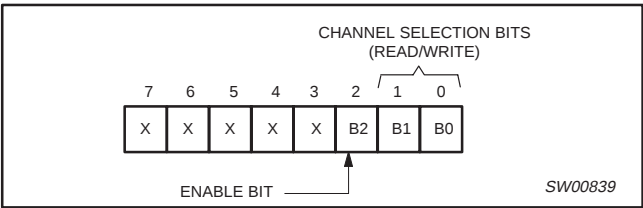


Figure 4. Control register

CONTROL REGISTER DEFINITION

A SCx/SDx downstream pair, or channel, is selected by the contents of the control register. This register is written after the PCA9540B has been addressed. The 2 LSBs of the control byte are used to determine which channel is to be selected. When a channel is selected, the channel will become active after a stop condition has been placed on the I<sup>2</sup>C bus. This ensures that all SCx/SDx lines will be in a HIGH state when the channel is made active, so that no false conditions are generated at the time of connection.

Table 1. Control Register; Write — Channel Selection/Read — Channel Status

| D7 | D6 | D5 | D4 | D3 | B2 | B1 | B0 | COMMAND                                     |
|----|----|----|----|----|----|----|----|---------------------------------------------|
| X  | X  | X  | X  | X  | 0  | X  | X  | No channel selected                         |
| X  | X  | X  | X  | X  | 1  | 0  | 0  | Channel 0 enabled                           |
| X  | X  | X  | X  | X  | 1  | 0  | 1  | Channel 1 enabled                           |
| X  | X  | X  | X  | X  | 1  | 1  | X  | No channel selected                         |
| 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | No channel selected; power-up default state |

POWER-ON RESET

When power is applied to V<sub>DD</sub>, an internal Power-On Reset holds the PCA9540B in a reset condition until V<sub>DD</sub> has reached V<sub>POR</sub>. At this point, the reset condition is released and the PCA9540B registers and I<sup>2</sup>C state machine are initialized to their default states, all zeroes causing all the channels to be deselected. Thereafter, V<sub>DD</sub> must be lowered below 0.2 V to reset the device.

VOLTAGE TRANSLATION

The pass gate transistors of the PCA9540B are constructed such that the V<sub>DD</sub> voltage can be used to limit the maximum voltage that will be passed from one I<sup>2</sup>C bus to another.

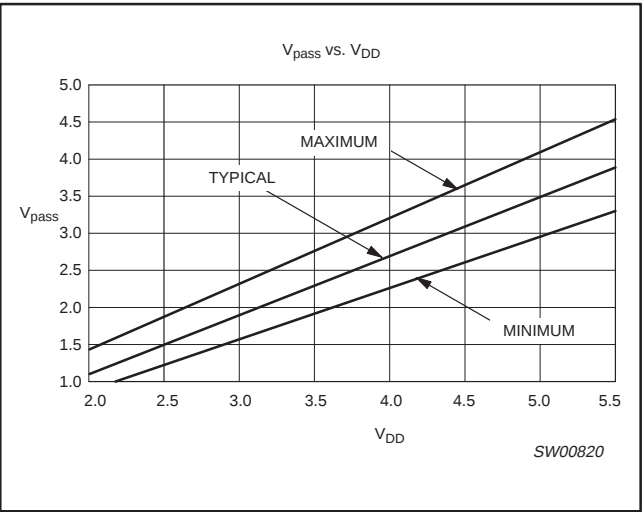


Figure 5. V<sub>pass</sub> voltage

Figure 5 shows the voltage characteristics of the pass gate transistors (note that the graph was generated using the data specified in the DC Characteristics section of this datasheet). In order for the PCA9540B to act as a voltage translator, the V<sub>pass</sub> voltage should be equal to, or lower than the lowest bus voltage. For example, if the main bus was running at 5 V, and the downstream buses were 3.3 V and 2.7 V, then V<sub>pass</sub> should be equal to or below 2.7 V to effectively clamp the downstream bus voltages. Looking at Figure 5, we see that V<sub>pass</sub> (max.) will be at 2.7 V when the PCA9540B supply voltage is 3.5 V or lower so the PCA9540B supply voltage could be set to 3.3 V. Pull-up resistors can then be used to bring the bus voltages to their appropriate levels (see Figure 12).

More Information can be found in Application Note AN262 *PCA954X family of I<sup>2</sup>C/SMBus multiplexers and switches*.

2-channel I<sup>2</sup>C multiplexer

PCA9540B

CHARACTERISTICS OF THE I<sup>2</sup>C-BUS

The I<sup>2</sup>C-bus is for 2-way, 2-line communication between different ICs or modules. The two lines are a serial data line (SDA) and a serial clock line (SCL). Both lines must be connected to a positive supply via a pull-up resistor when connected to the output stages of a device. Data transfer may be initiated only when the bus is not busy.

Bit transfer

One data bit is transferred during each clock pulse. The data on the SDA line must remain stable during the HIGH period of the clock pulse as changes in the data line at this time will be interpreted as control signals (see Figure 6).

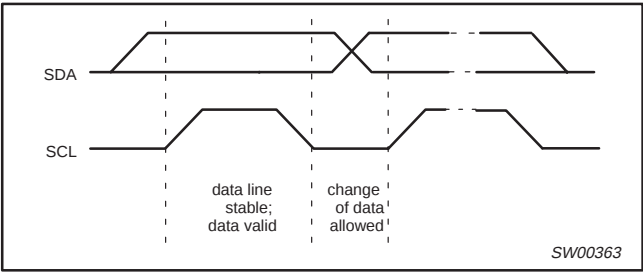


Figure 6. Bit transfer

Start and stop conditions

Both data and clock lines remain HIGH when the bus is not busy. A HIGH-to-LOW transition of the data line, while the clock is HIGH is defined as the start condition (S). A LOW-to-HIGH transition of the data line while the clock is HIGH is defined as the stop condition (P) (see Figure 7).

System configuration

A device generating a message is a 'transmitter', a device receiving is the 'receiver'. The device that controls the message is the 'master' and the devices which are controlled by the master are the 'slaves' (see Figure 8).

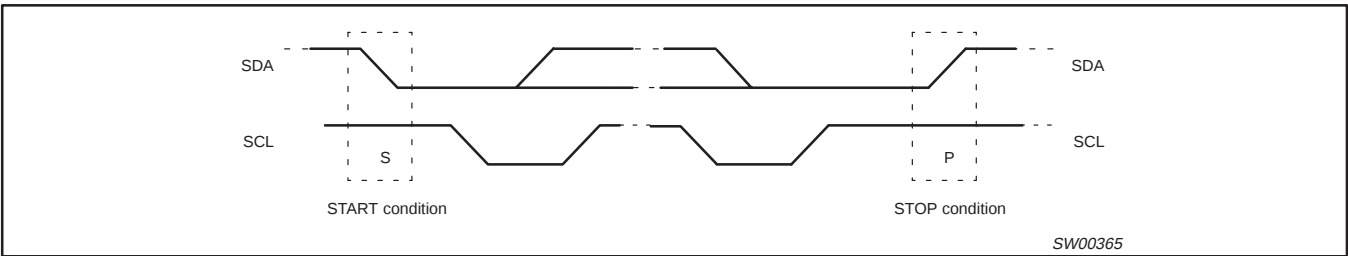


Figure 7. Definition of start and stop conditions

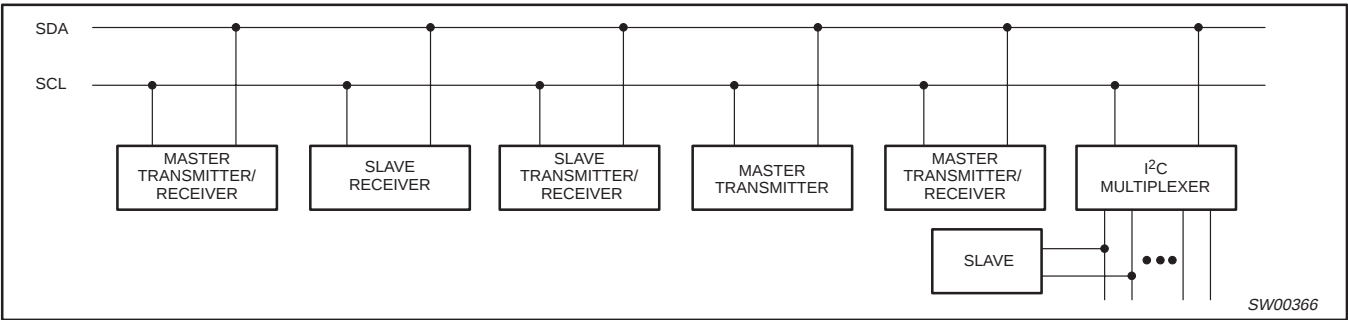


Figure 8. System configuration

2-channel I<sup>2</sup>C multiplexer

PCA9540B

Acknowledge

The number of data bytes transferred between the start and the stop conditions from transmitter to receiver is not limited. Each byte of eight bits is followed by one acknowledge bit. The acknowledge bit is a HIGH level put on the bus by the transmitter whereas the master generates an extra acknowledge related clock pulse.

A slave receiver which is addressed must generate an acknowledge after the reception of each byte. Also a master must generate an acknowledge after the reception of each byte that has been clocked out of the slave transmitter. The device that acknowledges has to pull down the SDA line during the acknowledge clock pulse, so that the SDA line is stable LOW during the HIGH period of the acknowledge related clock pulse, set-up and hold times must be taken into account.

A master receiver must signal an end of data to the transmitter by not generating an acknowledge on the last byte that has been clocked out of the slave. In this event, the transmitter must leave the data line HIGH to enable the master to generate a stop condition.

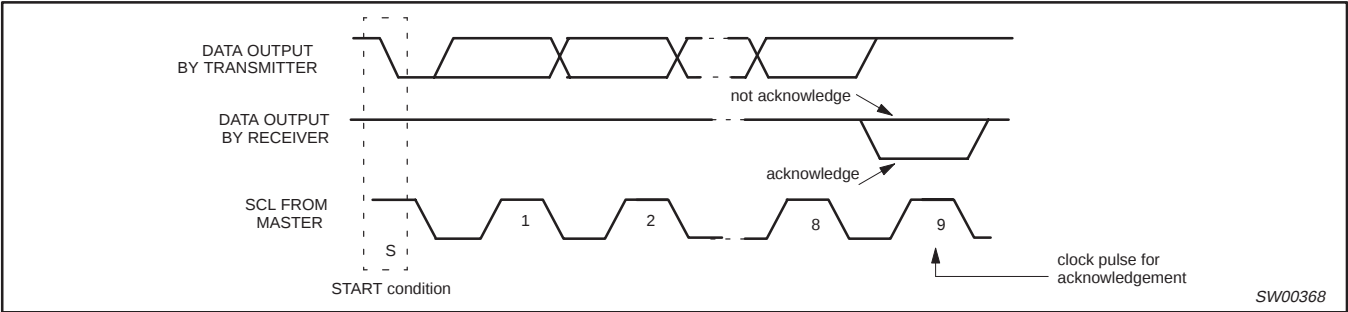


Figure 9. Acknowledgement on the I<sup>2</sup>C-bus

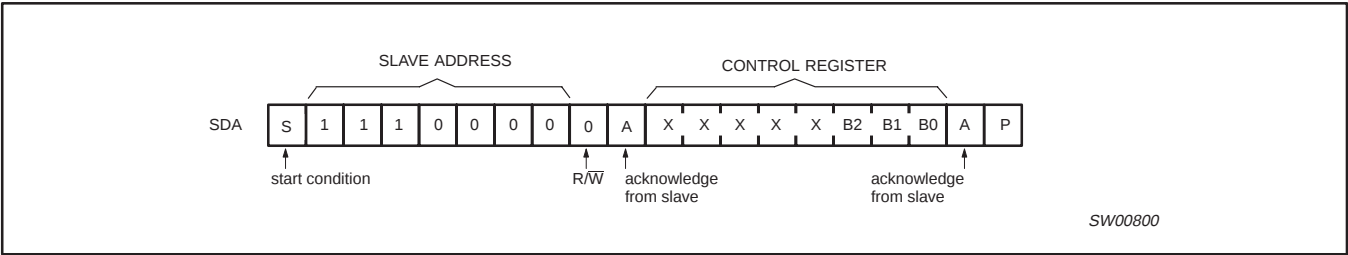


Figure 10. WRITE control register

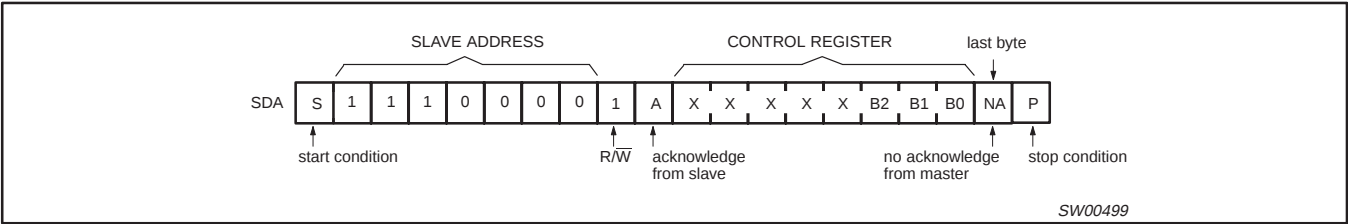


Figure 11. READ control register

2-channel I<sup>2</sup>C multiplexer

PCA9540B

## TYPICAL APPLICATION

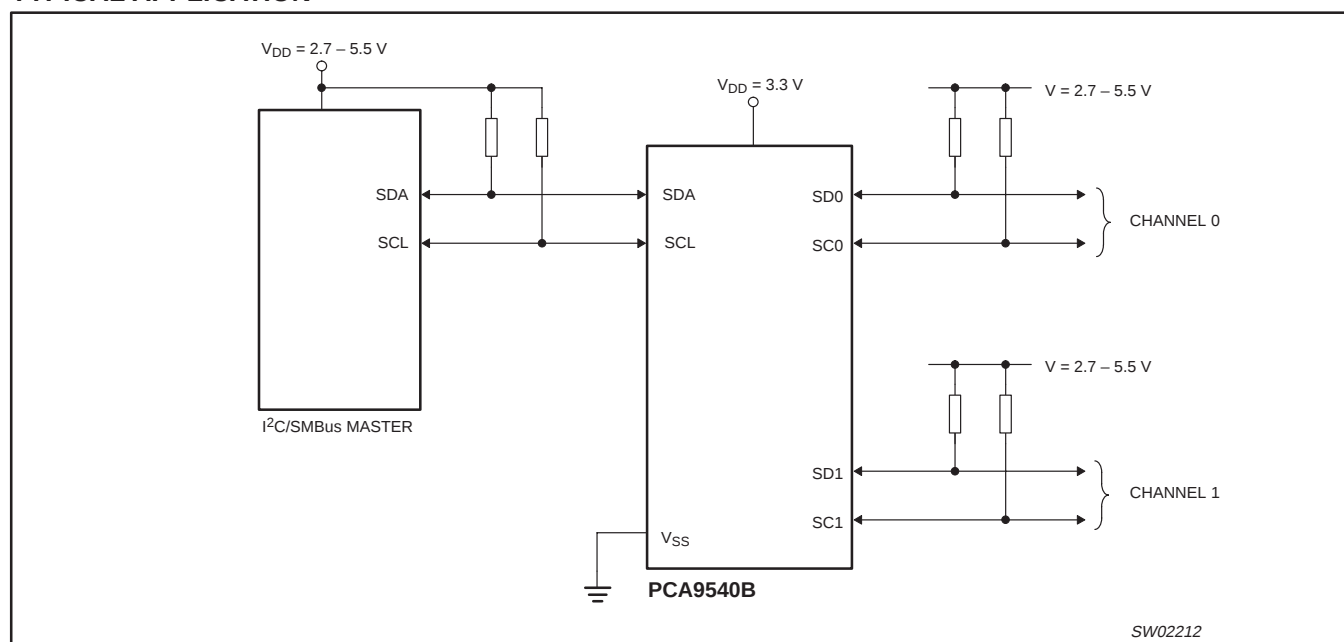


Figure 12. Typical application

2-channel I<sup>2</sup>C multiplexer

PCA9540B

**ABSOLUTE MAXIMUM RATINGS<sup>1, 2</sup>**

In accordance with the Absolute Maximum Rating System (IEC 134). Voltages are referenced to GND (ground = 0 V).

| SYMBOL           | PARAMETER                     | CONDITIONS | RATING       | UNIT |
|------------------|-------------------------------|------------|--------------|------|
| V <sub>DD</sub>  | DC supply voltage             |            | −0.5 to +7.0 | V    |
| V <sub>I</sub>   | DC input voltage              |            | −0.5 to +7.0 | V    |
| I <sub>I</sub>   | DC input current              |            | ±20          | mA   |
| I <sub>O</sub>   | DC output current             |            | ±25          | mA   |
| I <sub>DD</sub>  | Supply current                |            | ±100         | mA   |
| I <sub>SS</sub>  | Supply current                |            | ±100         | mA   |
| P <sub>tot</sub> | total power dissipation       |            | 400          | mW   |
| T <sub>stg</sub> | Storage temperature range     |            | −60 to +150  | °C   |
| T <sub>amb</sub> | Operating ambient temperature |            | −40 to +85   | °C   |

**NOTES:**

- Stresses beyond those listed may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability. The maximum junction temperature of this integrated circuit should not exceed 150 °C.

**DC CHARACTERISTICS**V<sub>DD</sub> = 2.3 to 3.6 V; V<sub>SS</sub> = 0 V; T<sub>amb</sub> = −40 to +85 °C; unless otherwise specified. (See page 9 for V<sub>DD</sub> = 3.6 to 5.5 V)

| SYMBOL                      | PARAMETER                       | TEST CONDITIONS                                                                                                                          | LIMITS             |     |                    | UNIT |
|-----------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|--------------------|------|
|                             |                                 |                                                                                                                                          | MIN                | TYP | MAX                |      |
| Supply                      |                                 |                                                                                                                                          |                    |     |                    |      |
| V <sub>DD</sub>             | Supply voltage                  |                                                                                                                                          | 2.3                | —   | 3.6                | V    |
| I <sub>DD</sub>             | Supply current                  | Operating mode; V <sub>DD</sub> = 3.6 V;<br>no load; V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub> ;<br>f <sub>SCL</sub> = 100 kHz | —                  | 20  | 50                 | μA   |
| I <sub>stb</sub>            | Standby current                 | Standby mode; V <sub>DD</sub> = 3.6 V;<br>no load; V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub> ; f <sub>SCL</sub> = 0 kHz        | —                  | 0.1 | 1                  | μA   |
| V <sub>POR</sub>            | Power-on reset voltage (Note 1) | no load; V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub>                                                                             | —                  | 1.6 | 2.1                | V    |
| Input SCL; input/output SDA |                                 |                                                                                                                                          |                    |     |                    |      |
| V <sub>IL</sub>             | LOW-level input voltage         |                                                                                                                                          | −0.5               | —   | 0.3V <sub>DD</sub> | V    |
| V <sub>IH</sub>             | HIGH-level input voltage        |                                                                                                                                          | 0.7V <sub>DD</sub> | —   | 6                  | V    |
| I <sub>OL</sub>             | LOW-level output current        | V <sub>OL</sub> = 0.4 V                                                                                                                  | 3                  | —   | —                  | mA   |
|                             |                                 | V <sub>OL</sub> = 0.6 V                                                                                                                  | 6                  | —   | —                  | mA   |
| I <sub>L</sub>              | Leakage current                 | V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub>                                                                                      | −1                 | —   | +1                 | μA   |
| C <sub>i</sub>              | Input capacitance               | V <sub>I</sub> = V <sub>SS</sub>                                                                                                         | —                  | 7   | 8                  | pF   |
| Pass Gate                   |                                 |                                                                                                                                          |                    |     |                    |      |
| R <sub>ON</sub>             | Switch resistance               | V <sub>CC</sub> = 3.0 to 3.6 V, V <sub>O</sub> = 0.4 V, I <sub>O</sub> = 15 mA                                                           | 5                  | 11  | 31                 | Ω    |
|                             |                                 | V <sub>CC</sub> = 2.3 to 2.7 V, V <sub>O</sub> = 0.4 V, I <sub>O</sub> = 10 mA                                                           | 7                  | 16  | 55                 |      |
| V <sub>Pass</sub>           | Switch output voltage           | V <sub>swin</sub> = V <sub>DD</sub> = 3.3 V; I <sub>swout</sub> = −100 μA                                                                | —                  | 1.9 | —                  | V    |
|                             |                                 | V <sub>swin</sub> = V <sub>DD</sub> = 3.0 to 3.6 V; I <sub>swout</sub> = −100 μA                                                         | 1.6                | —   | 2.8                |      |
|                             |                                 | V <sub>swin</sub> = V <sub>DD</sub> = 2.5 V; I <sub>swout</sub> = −100 μA                                                                | —                  | 1.5 | —                  |      |
|                             |                                 | V <sub>swin</sub> = V <sub>DD</sub> = 2.3 to 2.7 V; I <sub>swout</sub> = −100 μA                                                         | 1.1                | —   | 2.0                |      |
| I <sub>L</sub>              | Leakage current                 | V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub>                                                                                      | −1                 | —   | +1                 | μA   |
| C <sub>io</sub>             | Input/output capacitance        | V <sub>I</sub> = V <sub>SS</sub>                                                                                                         | —                  | 2.5 | 5                  | pF   |

**NOTE:**

- V<sub>DD</sub> must be lowered to 0.2 V in order to reset part.

2-channel I<sup>2</sup>C multiplexer

## PCA9540B

**DC CHARACTERISTICS**

$V_{DD} = 3.6$  to  $5.5$  V;  $V_{SS} = 0$  V;  $T_{amb} = -40$  to  $+85$  °C; unless otherwise specified. (See page 8 for  $V_{DD} = 2.3$  to  $3.6$  V)

| SYMBOL                        | PARAMETER                | TEST CONDITIONS                                                                                                                          | LIMITS              |     |                     | UNIT |
|-------------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----|---------------------|------|
|                               |                          |                                                                                                                                          | MIN                 | TYP | MAX                 |      |
| Supply                        |                          |                                                                                                                                          |                     |     |                     |      |
| V <sub>DD</sub>               | Supply voltage           |                                                                                                                                          | 3.6                 | —   | 5.5                 | V    |
| I <sub>DD</sub>               | Supply current           | Operating mode; V <sub>DD</sub> = 5.5 V;<br>no load; V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub> ;<br>f <sub>SCL</sub> = 100 kHz | —                   | 65  | 100                 | μA   |
| I <sub>stb</sub>              | Standby current          | Standby mode; V <sub>DD</sub> = 5.5 V;<br>no load; V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub>                                   | —                   | 0.3 | 1                   | μA   |
| V <sub>POR</sub> <sup>1</sup> | Power-on reset voltage   | no load; V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub>                                                                             | —                   | 1.6 | 2.1                 | V    |
| Input SCL; input/output SDA   |                          |                                                                                                                                          |                     |     |                     |      |
| V <sub>IL</sub>               | LOW-level input voltage  |                                                                                                                                          | −0.5                | —   | 0.3 V <sub>DD</sub> | V    |
| V <sub>IH</sub>               | HIGH-level input voltage |                                                                                                                                          | 0.7 V <sub>DD</sub> | —   | 6                   | V    |
| I <sub>OL</sub>               | LOW-level output current | V <sub>OL</sub> = 0.4 V                                                                                                                  | 3                   | —   | —                   | mA   |
|                               |                          | V <sub>OL</sub> = 0.6 V                                                                                                                  | 6                   | —   | —                   | μA   |
| I <sub>IL</sub>               | LOW-level input current  | V <sub>I</sub> = V <sub>SS</sub>                                                                                                         | −1                  | —   | 1                   | mA   |
| I <sub>IH</sub>               | HIGH-level input current | V <sub>I</sub> = V <sub>DD</sub>                                                                                                         | −1                  | —   | 1                   | μA   |
| C <sub>i</sub>                | Input capacitance        | V <sub>I</sub> = V <sub>SS</sub>                                                                                                         | —                   | 6   | 8                   | pF   |
| Pass Gate                     |                          |                                                                                                                                          |                     |     |                     |      |
| R <sub>ON</sub>               | Switch resistance        | V <sub>CC</sub> = 4.5 to 5.5 V; V <sub>O</sub> = 0.4 V; I <sub>O</sub> = 15 mA                                                           | 4                   | 9   | 24                  | Ω    |
| V <sub>Pass</sub>             | Switch output voltage    | V <sub>swin</sub> = V <sub>DD</sub> = 5.0 V; I <sub>swout</sub> = −100 μA                                                                | —                   | 3.6 | —                   | V    |
|                               |                          | V <sub>swin</sub> = V <sub>DD</sub> = 4.5 to 5.5 V; I <sub>swout</sub> = −100 μA                                                         | 2.6                 | —   | 4.5                 | V    |
| I <sub>L</sub>                | Leakage current          | V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub>                                                                                      | −1                  | —   | +1                  | μA   |
| C <sub>io</sub>               | Input/output capacitance | V <sub>I</sub> = V <sub>SS</sub>                                                                                                         | —                   | 2.5 | 5                   | pF   |

**NOTE:**

1.  $V_{DD}$  must be lowered to 0.2 V in order to reset part.

2-channel I<sup>2</sup>C multiplexer


PCA9540B

## AC CHARACTERISTICS

| SYMBOL        | PARAMETER                                                                                     | STANDARD-MODE<br>I <sup>2</sup> C-BUS |                  | FAST-MODE<br>I <sup>2</sup> C-BUS |                  | UNIT |
|---------------|-----------------------------------------------------------------------------------------------|---------------------------------------|------------------|-----------------------------------|------------------|------|
|               |                                                                                               | MIN                                   | MAX              | MIN                               | MAX              |      |
| $t_{pd}$      | Propagation delay from SDA to SD <sub>n</sub> or SCL to SC <sub>n</sub>                       | —                                     | 0.3 <sup>1</sup> | —                                 | 0.3 <sup>1</sup> | ns   |
| $f_{SCL}$     | SCL clock frequency                                                                           | 0                                     | 100              | 0                                 | 400              | kHz  |
| $t_{BUF}$     | Bus free time between a STOP and START condition                                              | 4.7                                   | —                | 1.3                               | —                | μs   |
| $t_{HD;STA}$  | Hold time (repeated) START condition<br>After this period, the first clock pulse is generated | 4.0                                   | —                | 0.6                               | —                | μs   |
| $t_{LOW}$     | LOW period of the SCL clock                                                                   | 4.7                                   | —                | 1.3                               | —                | μs   |
| $t_{HIGH}$    | HIGH period of the SCL clock                                                                  | 4.0                                   | —                | 0.6                               | —                | μs   |
| $t_{SU;STA}$  | Set-up time for a repeated START condition                                                    | 4.7                                   | —                | 0.6                               | —                | μs   |
| $t_{SU;STO}$  | Set-up time for STOP condition                                                                | 4.0                                   | —                | 0.6                               | —                | μs   |
| $t_{HD;DAT}$  | Data hold time                                                                                | 0 <sup>2</sup>                        | 3.45             | 0 <sup>2</sup>                    | 0.9              | μs   |
| $t_{SU;DAT}$  | Data set-up time                                                                              | 250                                   | —                | 100                               | —                | ns   |
| $t_R$         | Rise time of both SDA and SCL signals                                                         | —                                     | 1000             | $20 + 0.1C_b^3$                   | 300              | ns   |
| $t_F$         | Fall time of both SDA and SCL signals                                                         | —                                     | 300              | $20 + 0.1C_b^3$                   | 300              | μs   |
| $C_b$         | Capacitive load for each bus line                                                             | —                                     | 400              | —                                 | 400              | μs   |
| $t_{SP}$      | Pulse width of spikes which must be suppressed<br>by the input filter                         | —                                     | 50               | —                                 | 50               | ns   |
| $t_{VD;DATL}$ | Data valid (HL) <sup>4</sup>                                                                  | —                                     | 1                | —                                 | 1                | μs   |
| $t_{VD;DATH}$ | Data valid (LH) <sup>4</sup>                                                                  | —                                     | 0.6              | —                                 | 0.6              | μs   |
| $t_{VD;ACK}$  | Data valid Acknowledge                                                                        | —                                     | 1                | —                                 | 1                | μs   |

## NOTES:

1. Pass gate propagation delay is calculated from the 20 Ω typical R<sub>ON</sub> and the 15 pF load capacitance.
2. A device must internally provide a hold time of at least 300 ns for the SDA signal (referred to the V<sub>IHmin</sub> of the SCL signal) in order to bridge the undefined region of the falling edge of SCL.
3. C<sub>b</sub> = total capacitance of one bus line in pF.
4. Measurements taken with 1 kΩ pull-up resistor and 50 pF load.

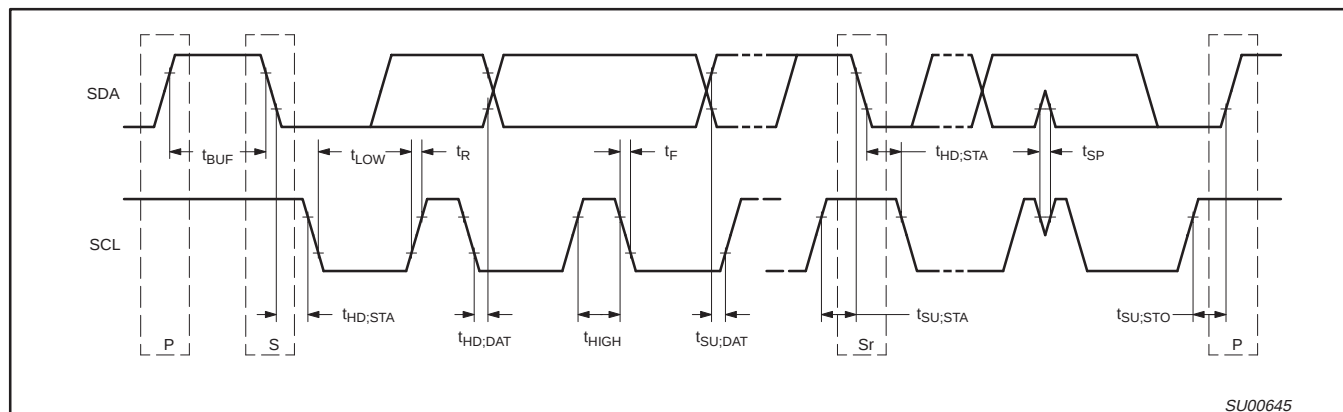
Figure 13. Definition of timing on the I<sup>2</sup>C-bus

2-channel I<sup>2</sup>C multiplexer

PCA9540B

SO8: plastic small outline package; 8 leads; body width 3.9 mm

SOT96-1

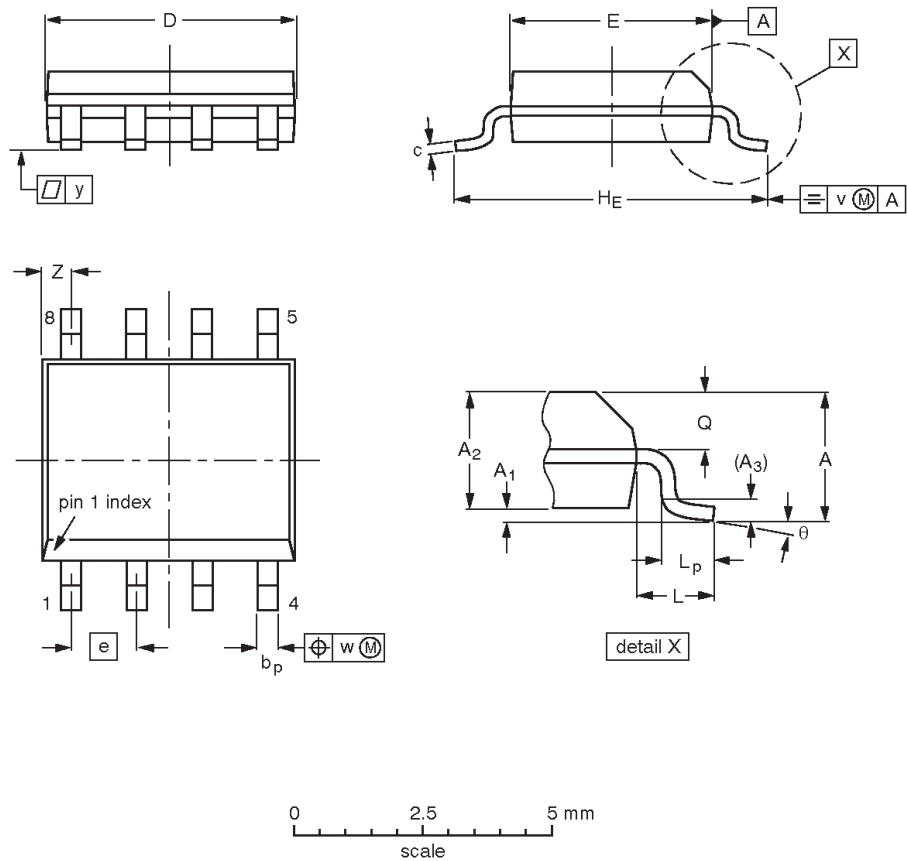

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

| UNIT   | A<br>max. | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | b <sub>p</sub> | c                | D <sup>(1)</sup> | E <sup>(2)</sup> | e    | H <sub>E</sub> | L     | L <sub>p</sub> | Q              | v    | w    | y     | Z <sup>(1)</sup> | θ        |
|--------|-----------|----------------|----------------|----------------|----------------|------------------|------------------|------------------|------|----------------|-------|----------------|----------------|------|------|-------|------------------|----------|
| mm     | 1.75      | 0.25<br>0.10   | 1.45<br>1.25   | 0.25           | 0.49<br>0.36   | 0.25<br>0.19     | 5.0<br>4.8       | 4.0<br>3.8       | 1.27 | 6.2<br>5.8     | 1.05  | 1.0<br>0.4     | 0.7<br>0.6     | 0.25 | 0.25 | 0.1   | 0.7<br>0.3       | 8°<br>0° |
| inches | 0.069     | 0.010<br>0.004 | 0.057<br>0.049 | 0.01           | 0.019<br>0.014 | 0.0100<br>0.0075 | 0.20<br>0.19     | 0.16<br>0.15     | 0.05 | 0.244<br>0.228 | 0.041 | 0.039<br>0.016 | 0.028<br>0.024 | 0.01 | 0.01 | 0.004 | 0.028<br>0.012   |          |

Notes

- 1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.
- 2. Plastic or metal protrusions of 0.25 mm (0.01 inch) maximum per side are not included.


| OUTLINE<br>VERSION | REFERENCES |        |       |  | EUROPEAN<br>PROJECTION | ISSUE DATE            |
|--------------------|------------|--------|-------|--|------------------------|-----------------------|
|                    | IEC        | JEDEC  | JEITA |  |                        |                       |
| SOT96-1            | 076E03     | MS-012 |       |  |                        | -99-12-27<br>03-02-18 |

2-channel I<sup>2</sup>C multiplexer

PCA9540B

TSSOP8: plastic thin shrink small outline package; 8 leads; body width 3 mm

SOT505-1

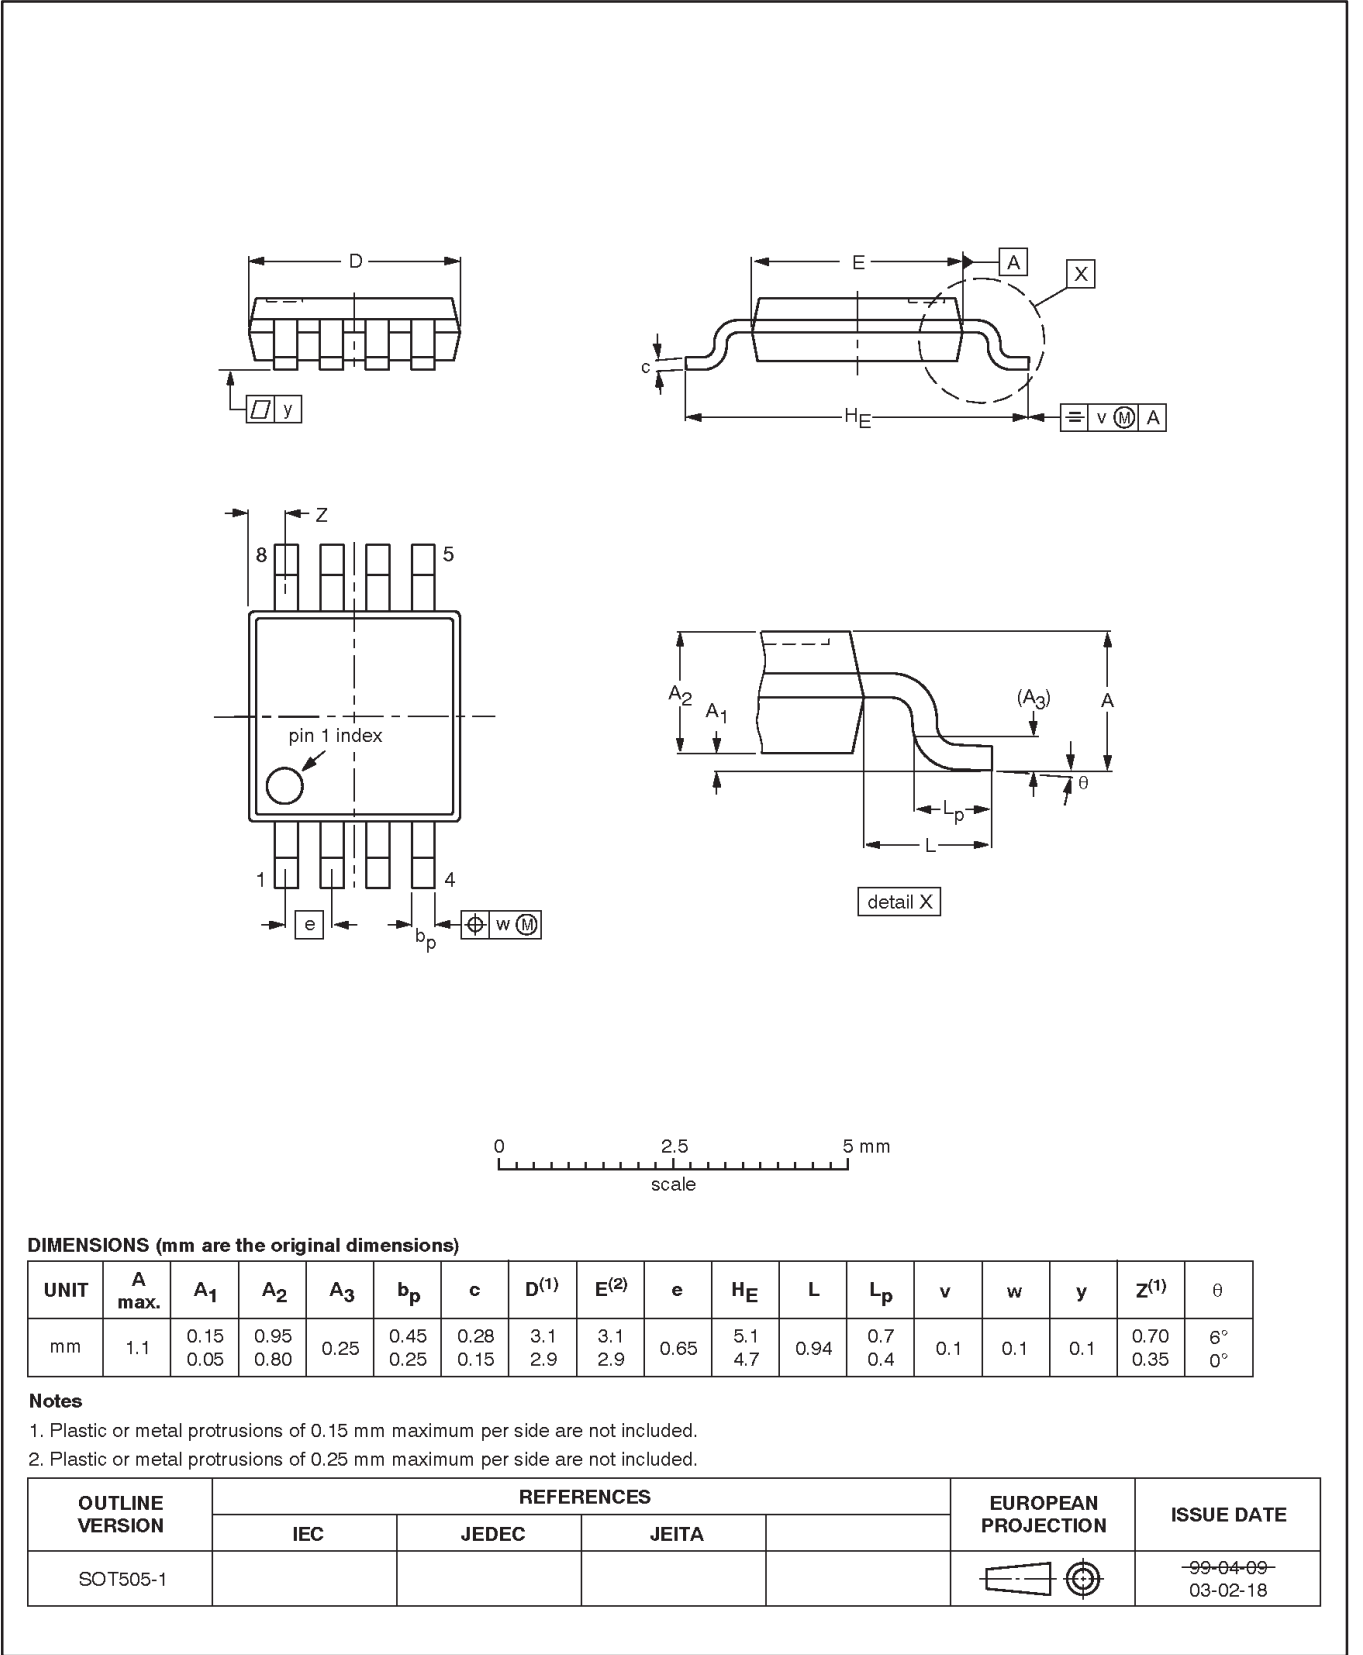

2-channel I<sup>2</sup>C multiplexer

PCA9540B

## REVISION HISTORY

| Rev | Date     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| _2  | 20040929 | <b>Product data sheet (9397 750 13731). Supersedes data of 2004 Apr 13 (9397 750 12918).</b><br>Modifications: <ul style="list-style-type: none"><li>• Section "Control Register Definition" on page 4: add "No channel selected; power-up default state" row to bottom of Table 1.</li><li>• Section "Power-on Reset" on page 4 re-written.</li><li>• AC characterists table on page 10: Add Note 4 and references to it at parameters <math>t_{VD;DATL}</math> and <math>t_{VD;DATH}</math>.</li></ul> |
| _1  | 20040413 | <b>Product data (9397 750 12918).</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

2-channel I<sup>2</sup>C multiplexer

PCA9540B



Purchase of Philips I<sup>2</sup>C components conveys a license under the Philips' I<sup>2</sup>C patent to use the components in the I<sup>2</sup>C system provided the system conforms to the I<sup>2</sup>C specifications defined by Philips. This specification can be ordered using the code 9398 393 40011.

## Data sheet status

| Level | Data sheet status <sup>[1]</sup> | Product status <sup>[2] [3]</sup> | Definitions                                                                                                                                                                                                                                                                                    |
|-------|----------------------------------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I     | Objective data                   | Development                       | This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.                                                                                                    |
| II    | Preliminary data                 | Qualification                     | This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.             |
| III   | Product data                     | Production                        | This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). |

[1] Please consult the most recently issued data sheet before initiating or completing a design.

[2] The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

[3] For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

## Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## Disclaimers

**Life support** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes in the products—including circuits, standard cells, and/or software—described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

## Contact information

For additional information please visit  
<http://www.semiconductors.philips.com>. Fax: +31 40 27 24825

© Koninklijke Philips Electronics N.V. 2004  
 All rights reserved. Printed in U.S.A.

Date of release: 09-04

For sales offices addresses send e-mail to:  
[sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com).

Document order number:

9397 750 13731

*Let's make things better.*