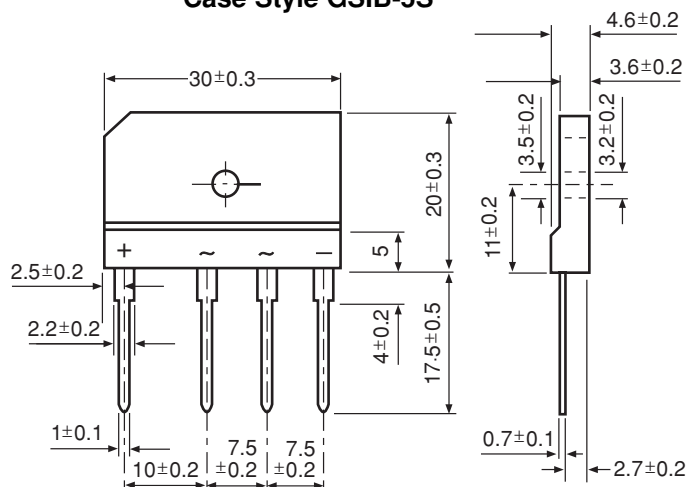


Single-Phase Single In-Line Bridge Rectifiers

Reverse Voltage 200 to 800V
Forward Current 20A**Case Style GSIB-5S**

Dimensions in millimeters

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- This series is UL listed under the Recognized Component Index, file number E54214.
- High case dielectric strength of 2500 VRMS
- Ideal for printed circuit boards
- Glass passivated chip junction
- High surge current capability
- High temperature soldering guaranteed: 260°C/10 seconds, 0.375 (9.5mm) lead length, 5lbs. (2.3kg) tension

Mechanical Data

Case: GSIB-5S Molded plastic body**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026**Mounting Position:** Any (Note 3)**Mounting Torque:** 8 in-lbs max.**Weight:** 0.26 oz., 7.0 g

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	GSIB2020	GSIB2040	GSIB2060	GSIB2080	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	800	V
Maximum RMS voltage	V_{RMS}	140	280	420	560	V
Maximum DC blocking voltage	V_{DC}	200	400	600	800	V
Maximum average forward rectified output current at $T_C = 87^\circ\text{C}^{(1)}$ $T_A = 25^\circ\text{C}^{(2)}$	$I_{F(AV)}$	20 3.5				A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	240				A
Rating for fusing ($t < 8.3\text{ms}$)	I^2t	240				A ² sec
Maximum thermal resistance per leg	$R_{\theta JA}$ $R_{\theta JC}$	22 ⁽²⁾ 1.5 ⁽¹⁾				°C/W
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150				°C

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	GSIB2020	GSIB2040	GSIB2060	GSIB2080	Unit
Maximum instantaneous forward voltage drop per leg at 10A	V_F	1.00				V
Maximum DC reverse current at rated DC blocking voltage per leg $T_A = 25^\circ\text{C}$ $T_A = 125^\circ\text{C}$	I_R	10 250				μA


Notes: (1) Unit case mounted on Al plate heatsink.

(2) Units mounted on P.C.B. without heatsink


(3) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw

**Ratings and
Characteristic Curves** ($T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 – Derating Curve Output
Rectified Current**

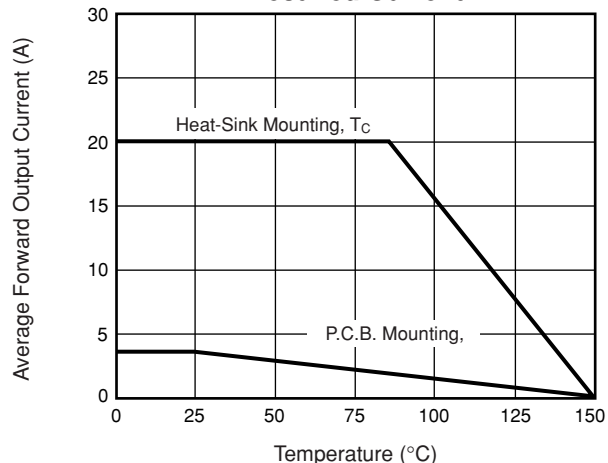


**Fig. 2 – Maximum Non-Repetitive Peak
Forward Surge Current Per Leg**

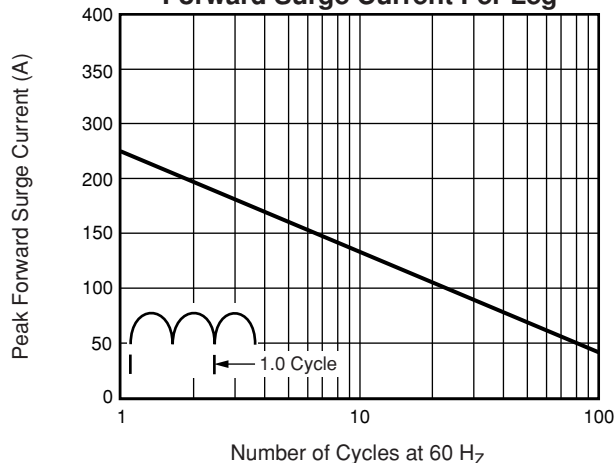


**Fig. 3 – Typical Forward Characteristics
Per Leg**

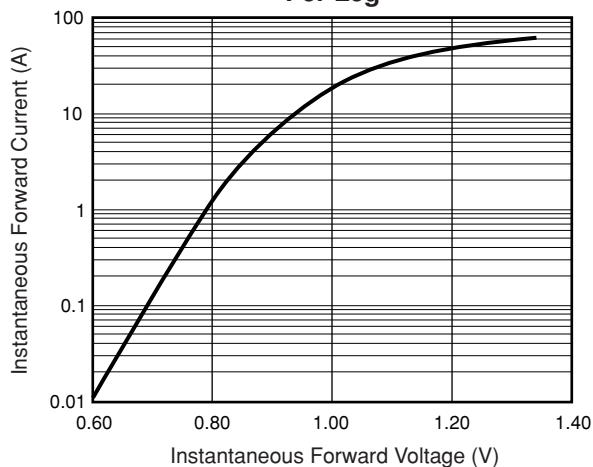

**Fig. 4 – Typical Reverse Characteristics
Per Leg**

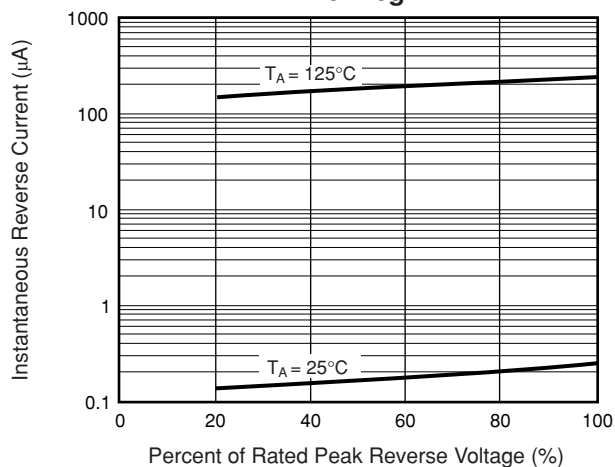

**Fig. 5 – Typical Junction Capacitance
Per Leg**

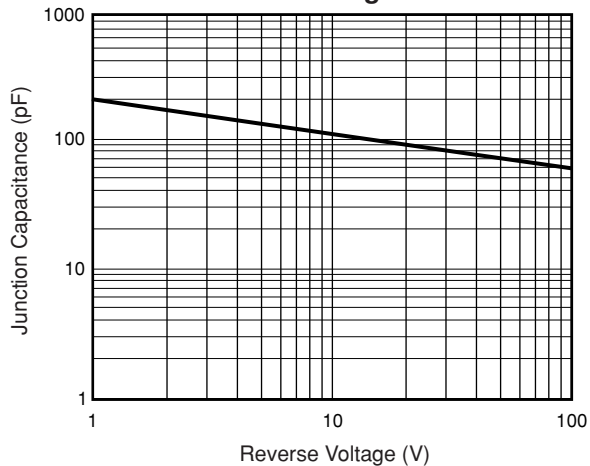

**Fig. 6 – Typical Transient Thermal
Impedance**

