


# LT023MC/MD/MF

## Features

- Low noise  
S/N: 80 dB (according to measurement method Fig. 29-2)
- Wavelength: 780nm
- Single transverse mode
- Multi longitudinal mode

## Applications

- Video disc players
- Fiber optic communications
- Light source for analog processing
- Measurement instruments
- Analysis instruments

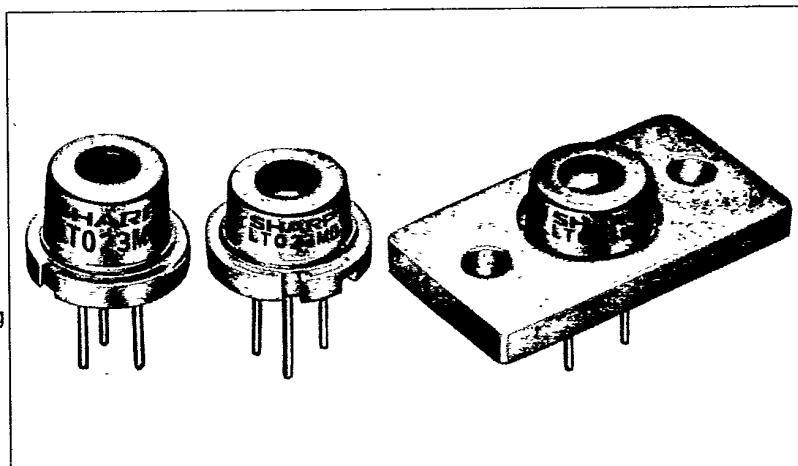

## Absolute Maximum Ratings

(Tc=25°C)

Parameter	Symbol	Ratings	Units
Optical power output	Po	5	mW
Reverse voltage PIN	V <sub>R</sub>	2	V
		30	
Operating temperature *1	To <sub>pr</sub>	-10 ~ +60	°C
Storage temperature *1	T <sub>stg</sub>	-40 ~ +85	°C
Soldering temperature *2	T <sub>sol</sub>	260 (less than 5 seconds)	°C

\*1 Case temperature    \*2 At point 1.6 mm from lead base

## Electro-optical Characteristics \*1

(Tc=25°C)

Parameter	Symbol	Condition	Ratings			Units	
			MIN	TYP	MAX		
Threshold current	I <sub>th</sub>	—	—	50	90	mA	
Operating current	I <sub>op</sub>	Po=3mW	—	65	110	mA	
Operating voltage	V <sub>op</sub>	Po=3mW	—	1.75	2.2	V	
Wavelength *2	λ <sub>p</sub>	Po=3mW	770	780	795	nm	
Monitor current	I <sub>m</sub>	Po=3mW V <sub>R</sub> =15V	0.3	0.9	1.6	mA	
Radiation characteristics	Angle *3	Parallel to junction	θ //	Po=3mW	9	11	deg
		Perpendicular to junction	θ ⊥	Po=3mW	20	37	deg
Emission point accuracy	Ripple	—	—	Po=3mW	—	±20	%
		Δφ //	—	Po=3mW	—	±2	deg
	Angle	Δφ ⊥	—	Po=3mW	—	±3	deg
		Δx, Δy, Δz	—	—	—	±80	μm
Differential efficiency	η	—	2mW I <sub>F</sub> (3mW) - I <sub>F</sub> (1mW)	0.1	0.25	0.6	mW/mA
Coherence	γ	Po=3mW	—	—	0.47	—	

\*1 Initial value

\*3 Angle at 50% peak intensity (full width at half-maximum)

\*2 Single transverse mode

\*4 Not specified for LT023MF

## Electrical Characteristics of Photodiode

(Tc=25°C)

Parameter	Symbol	Condition	Ratings			Units
			MIN	TYP	MAX	
Sensitivity	S	V <sub>R</sub> =15V	—	0.3	—	mA/mW
Dark current	I <sub>d</sub>	V <sub>R</sub> =15V	—	—	250	nA
Terminal capacitance	C <sub>t</sub>	V <sub>R</sub> =15V	—	8	20	pF