

Power Splitters/Combiners

NEW!

ZX10-4-SERIES

4 Way-0° 50Ω 800 to 2700 MHz

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	2.5W max.
Power Input (as a combiner)	0.125W max.*


*maximum VSWR at output 1.2:1

Features

- low insertion loss, 0.6 dB typ.
- high isolation, 20 dB typ.
- rigid unibody construction
- gold plated connectors;
nickel plated body
- low cost
- small size
- patent pending

Applications


- antenna arrays
- signal distribution
- test bench



CASE STYLE: GR1026

PRICE: \$38.95 ea. QTY (1-24)

Outline Drawing

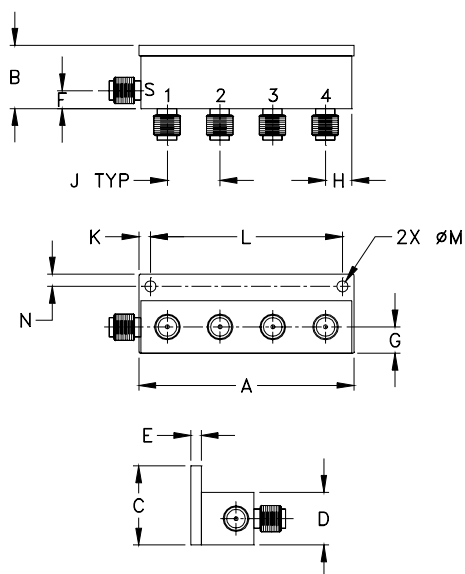




Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
2.04	.60	.75	.50	.10	.17	.25	.25
51.82	15.24	19.05	12.70	2.54	4.32	6.35	6.35
J	K	L	M	N	wt.		
.50	.11	1.820	.106	.12	grams		
12.70	2.79	46.23	2.69	3.05	60.0		

Splitter Electrical Specifications (T_{AMB}=25°C)

MODEL NO.	FREQ. RANGE (MHz) f _L -f _U	ISOLATION (dB)		INSERTION LOSS (dB) above 6.0 dB		PHASE UNBALANCE (Degrees) Max.	AMPLITUDE UNBALANCE (dB) Max.	INPUT VSWR (:1) Typ.	OUTPUT VSWR (:1) Typ.
		Typ.	Min.	Typ.	Max.				
ZX10-4-11	800-1125 875-1050	20 24	15 18	0.6 0.6	1.3 1.0	3 3	0.7 0.7	1.2 1.2	1.2 1.2
ZX10-4-14	1100-1450	20	15	0.8	1.3	7	0.8	1.3	1.3
ZX10-4-19	1425-1900 1450-1775	20 24	16 20	0.75 0.75	1.0 1.0	6 5	0.9 0.8	1.2 1.2	1.2 1.2
ZX10-4-24	1675-2350 1775-2200	20 25	17 20	0.9 0.9	1.1 1.1	5 5	0.7 0.7	1.18 1.18	1.3 1.3
ZX10-4-27	2225-2700 2400-2600	20 25	16 20	1.0 0.8	1.5 1.3	9 9	1.2 1.2	1.4 1.4	1.25 1.25

Performance Charts

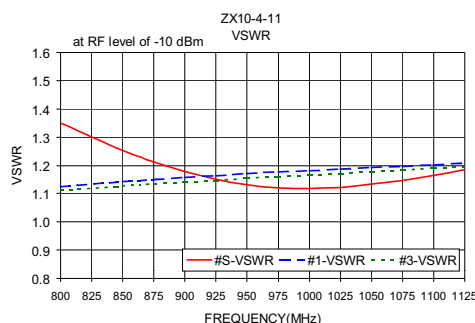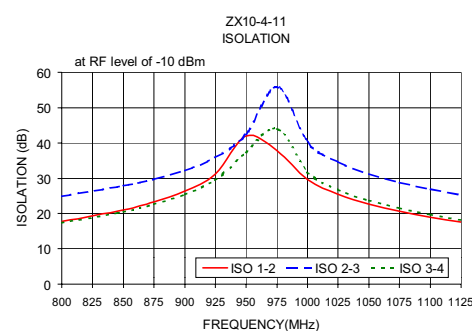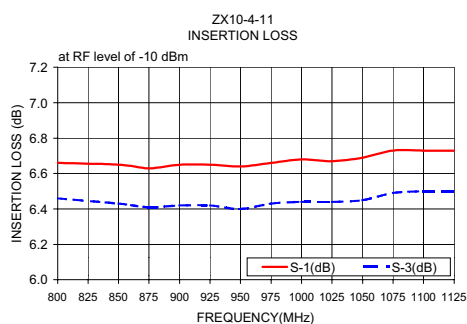

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED

REV. A
M91558
ZX10-4-11 ED10988/1
ZX10-4-14 ED10988/4
ZX10-4-19 ED10988/2
ZX10-4-24 ED10988/5
ZX10-4-27 ED10988/3
ZX10-4-SERIES
AD/RS/CP
040331
page 1 of 2

ZX10-4-SERIES

