

Coaxial

Low Pass Filter

DC to 780 MHz (40 dB Isolation up to 20 GHz)

NEW!
VLFX-780

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input* 10W max. at 25°C

*Passband rating, derate linearly to 3.5W at 100°C ambient.

Features


- very good isolation, 40 dB up to 20 GHz
- 21 sections
- temperature stable LTCC internal structure
- patent pending
- re-entry frequency > 20 GHz
- rugged stainless steel unibody


 CASE STYLE: FF1118
 PRICE: \$ 39.95 ea. QTY (1-9)

Applications

- harmonic rejection
- transmitters/receivers
- lab use
- test instrumentation


Outline Drawing

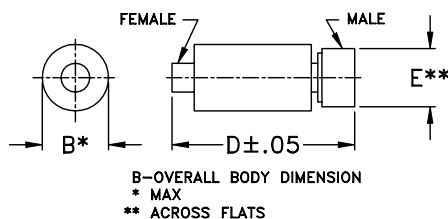


Outline Dimensions (inch)

B	D	E	wt.
.39	2.67	.312	grams
9.91	67.82	7.92	17.0

Functional Schematic



Typical Frequency Response


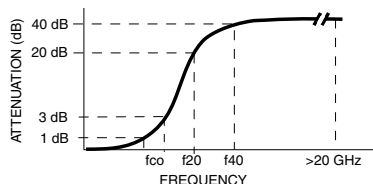


Low Pass Filter Electrical Specifications @ 25°C

MODEL NO.	PASSBAND (MHz) (Loss < 1.2dB) Max.	fco, MHz Nom (Loss 3 dB) Typ	STOPBAND (MHz) (Loss, dB)		VSWR (:1)		NO. OF SECTIONS
			f20 Min.	f40 Typ.	Stopband Typ.	Passband Typ.	
VLFX-780	DC-780	950	1450	1610-20000	10	1.25	21

Typical Performance Data @ 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	0.20	1.07
200	0.42	1.23
500	0.67	1.20
780	1.00	1.15
840	1.24	1.38
900	1.80	1.89
960	2.97	2.94
1050	5.85	6.43
1350	20.52	41.39
1620	41.62	73.11
1750	44.97	78.34
2000	47.85	88.41
2500	78.54	98.33
5000	69.60	89.14
7500	59.97	45.09
10000	74.94	28.77
12500	55.61	18.76
15000	45.26	1.23
17500	66.73	22.68
20000	62.04	8.82

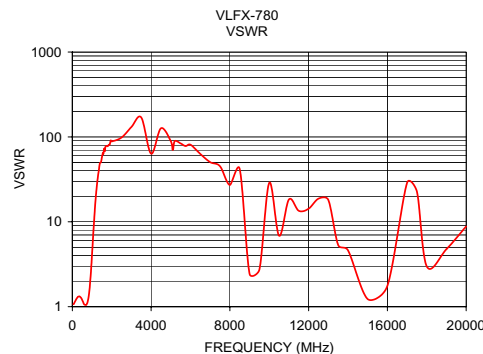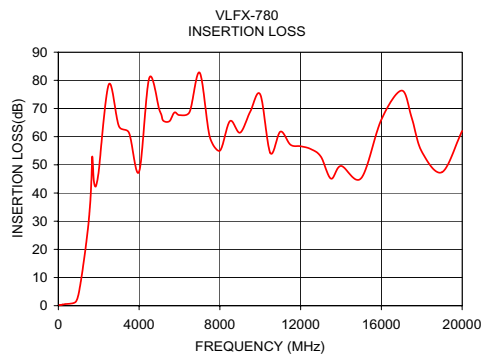
Mini-Circuits®
INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

 REV. OR
 M96318
 VLFX-780
 EDU-0399
 ED-11930A/10
 URJ/AD/CP
 050119