




FAST ETHERNET 10BASE-T/100BASE-TX TRANSFORMER MODULES





Networking Components



ELECTRICAL CHARACTERISTICS @25°C


Rise Time & Fall Time @5.0ns (Max), Hi-Pot Test @60Sec, 1500Vrms, OCL @8mA DC Bias 350uH (Min)														
Model	Insertion Loss (dB Max)	Return Loss (dB Min)				Cross Talk (dB Min)				Com. To Com. Rejection Ratio (dB Min)		Diff. To Com. Mode Rejection (dB Min)		Turns Ratio TX/RX (±5%)
	1~100	2~30	40	50	60~80	1	30	60	100	1~60	60~100	1~60	60~100	1
	MHz	MHz				MHz				MHz		MHz		MHz
LF8509	-1.0	-18	-17	-14.5	-12	-65	-55	-45	-35	-40	-30	-40	-30	1:1 / 1:1

MECHANICAL CONSTRUCTION



UNIT : mm / inch
A = 12.70 ± 0.254 / 0.500 ± 0.010
B = 12.00 ± 0.254 / 0.472 ± 0.010
C = 5.80 ± 0.254 / 0.228 ± 0.010
D = 16.00 ± 0.254 / 0.630 ± 0.010
E = 1.27 / 0.050 (TYP)
F = 0.46 ± 0.127 / 0.018 ± 0.005
G = 0.254 ± 0.127 / 0.010 ± 0.005
H = 0.254 / 0.010 (TYP)
I = 1.00 ± 0.254 / 0.039 ± 0.010
J = 0° ~ 8°
K = 8.89 / 0.350 (TYP)

SCHEMATICS

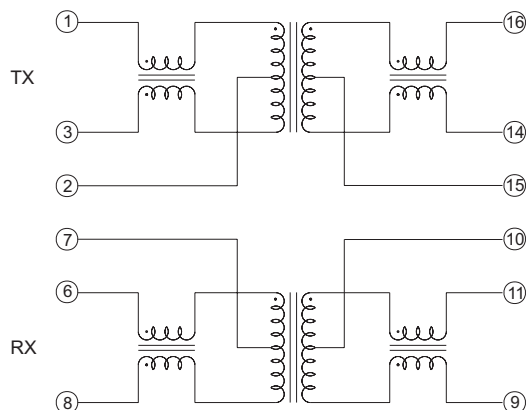

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.
TEL: 886-3-3591968; FAX: 886-3-3591991
[Http://www.deltaww.com/products/networking](http://www.deltaww.com/products/networking)