



Revision			
Rev.	Description	Date	Approved



MODEL NO:736W-B
Rating:15A125V//250V AC(UL,CSA,VDE,
FIMKO,DEMKO,NEMKO,SEMKO)
APPROVAL File:

UL APPROVAL
CSA APPROVAL
VDE APPROVAL
FIMKO APPROVAL
DEMKO APPROVAL
NEMKO APPROVAL
SEMKO APPROVAL



PANEL CUT OUT

CIRCUIT BREAKER TRIP TIME VS AMPERES

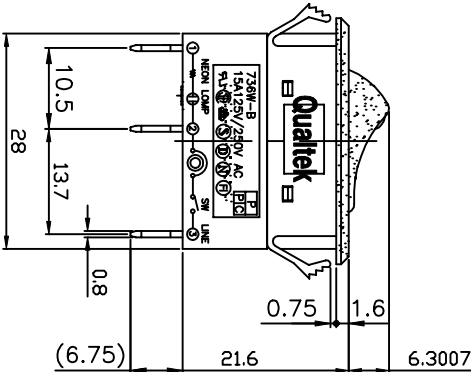

Model Number	Current Rating	Overload Percentage	Trip Time (in seconds) VS Amperes at+25
736W-B-101	15A	100%	No Trip
		150%	Trip in 1 hour
		200%	3~30
		300%	1~10
		400%	0.4~2.5
		600%	0.2~0.75
		800%	0.10~0.4
.		1000%	0.07~0.3

Qualtek Electronics Corp.				
PPC DIVISION				
Dim range (mm)	Tolerance ^{+/-} (mm)	Part Number: 736W-B-101		
0-1	0.15	Description: CIRCUIT BREAKER/SWITCH ILLUMINATED WITH BLACK BODY AND RED ACTUATOR		
1-6	0.20			
6-18	0.30			
18-50	0.50			
50-120	0.70			
120-250	0.90	Drawn/Date	Checked/Date	Approved/Date
250-500	1.20	S.CHEN 08-02-99	08-02-99	JJH/08-02-99

