



**POWER MATE
TECHNOLOGY CO.,LTD.**



UL E193009
TUV R50020744
CB JPTUV-5363
CE MARK

QEB125 SERIES Single output

- SINGLE OUTPUT UP TO 35A
- INDUSTRY STANDARD FOOTPRINT
- NO MINIMUM LOAD
- ADJUSTABLE OUTPUT VOLTAGE
- UNDER-VOLTAGE LOCKOUT
- HIGH EFFICIENCY UP TO 90%
- COMPACT 2.28 X 1.45 X 0.50 INCH PACKAGE
- FIXED SWITCHING FREQUENCY

QEB125 single output DC/DC converters provide up to 125 watts of output power in an industry standard quarter-brick package and footprint. These units are specifically designed to meet the power needs of low-voltage silicon. All models feature a wide input range, trimmable output voltage and a 35A current rating. Remote sense and remote on/off facilities are included as standard, and the converters are comprehensively protected against over-current, over-voltage and over-temperature conditions. The QEB125 converters are especially suited to telecom, networking and industrial application.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			
Output power			125 Watts max
Voltage accuracy	Full load and nominal Vin		± 1.5%
Voltage adjustability	(Note1)		+ 10% , -20%
Minimum load			None
Line regulation	LL to HL at FL		±0.2%
Load regulation	No load to Full load		See table
Remote Sense			10% of Vout
Ripple and noise	20MHz bandwidth (Measured with a 1uF M/C and a 10uF T/C)		100mVp-p
Temperature coefficient			±0.02% / °C, max
Transient response recovery time	25% load step change		200uS
Over voltage protection threshold(Non-latching Hiccup)			120% Vout max
Over Current Protection threshold			110% ~ 140% of Iout Rated
Short circuit protection			Hiccup, automatic recovery
INPUT SPECIFICATIONS			
Input voltage range	48V nominal input		36 – 75VDC
Under voltage lockout	Power up Power down		34V typ. 32V typ.
Input filter (Note 2)			L-C type
Input surge voltage	100mS max		100VDC
Start up time	Nominal Vin and constant resistor load	Power up Remote ON/OFF	25mS typ 25mS typ
Remote ON/OFF (Note3)			
I _{ON/OFF} = 1mA max			
(Negative logic)	DC-DC ON	Short or 0V < Vr < 1.2V	
	DC-DC OFF	Open or 3.5V < Vr < 15V	
(Positive logic)	DC-DC ON	Open or 3.5V < Vr < 15V	
	DC-DC OFF	Short or 0V < Vr < 1.2V	

GENERAL SPECIFICATIONS			
Efficiency			See table
Isolation voltage	Input to Output		1600VDC,min
	Input to Case		1000VDC,min
	Output to Case		1000VDC,min
Isolation resistance			10 ⁷ ohms, min
Isolation capacitance			2500 pF, max
Switching frequency			270 KHz, typ
Approvals and standard			IEC60950, UL60950, EN60950
Case material			Aluminum base plate
Weight (approx)			42g (1.46 oz)
MTBF	Bellcore TR-NWT-000332, Tc=40 °C , Io=80%,max		2.5 x 10 ⁶ hrs
ENVIRONMENTAL SPECIFICATIONS			
Operating base-plate temperature range (Note 4)			-40°C to +100°C
Over temperature protection			110°C, max
Storage temperature range			-55°C to +125°C
Thermal shock			MIL-STD-810D
Vibration	10~55Hz, 2G, 3minutes period, 30minutes along X,Y and Z		
Humidity , Max , Non-Condensing			95%
EMC CHARACTERISTICS			
Conducted emissions	EN55022 (Note 5)		Level A
	EN55022 (Note 5)		Level B
Radiated emissions	EN55022		Level A
ESD	EN61000-4-2		Perf. Criteria2
Radiated immunity	EN61000-4-3		Perf. Criteria2
Fast transient	EN61000-4-4		Perf. Criteria2
Surge	EN61000-4-5		Perf. Criteria2
Conducted immunity	EN61000-4-6		Perf. Criteria2




**POWER MATE
TECHNOLOGY CO.,LTD.**

125 WATTS SINGLE OUTPUT DC-DC CONVERTER

Model Number	Input Range	Output Voltage	Output Current	Eff ⁽⁶⁾ (%)	Load regulation
QEB125-48S1P8	36 – 75 VDC	1.8 VDC	35A	84	5.4mV
QEB125-48S2P5	36 – 75 VDC	2.5 VDC	35A	86	7.5mV
QEB125-48S3P3	36 – 75 VDC	3.3 VDC	30A	88	10mV
QEB125-48S05	36 – 75 VDC	5 VDC	25A	90	15mV

Note


- Maximum output deviation is 10% inclusive of trim. If remote sense is not being used, the +V sense should be connected to its corresponding +OUTPUT and likewise the –sense should be connected to its corresponding –OUTPUT.
- An external filter capacitor is required for normal operation. The capacitor should be capable of handling 1A ripple current for 48V models. Power mate suggest: Nippon chemi-con KMF series, 220 μ F/100V, ESR 90m Ω .
- The negative / positive logic and pin length are optional (see table). The pin voltage is referenced to negative input.
- Heat sink is optional and P/N : 7G-0029 , 7G-0030 , 7G-0031 , 7G-0032.
- The QEB125 meets level A and level B conducted emissions only with external components connected before the input pin to the converter.
- Typical value at nominal input voltage and full load
- BASEPLATE GROUNING : Base-plate should be grounded at one of the four screw bolts prior to operation.
- The converter is provided by basic insulation.

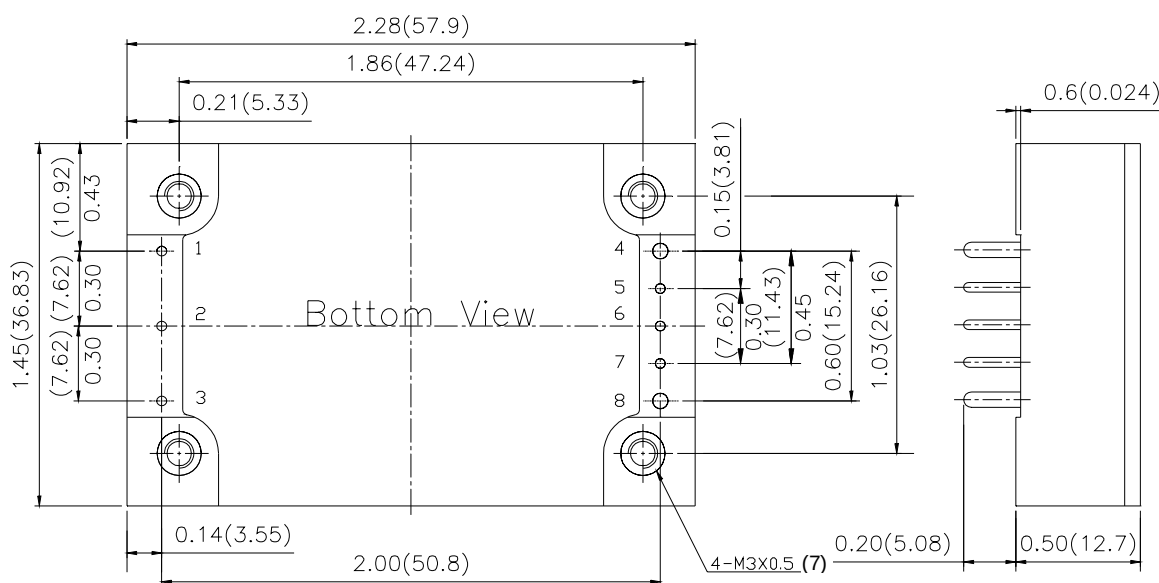

PIN1,2,3,5,6,7, DIM. 0.040(1.016mm)
PIN4,8, DIM. 0.060(1.57mm)
ALL DIMENSIONS IN INCHES(mm)
PIN PITCH TOLERANCE $\pm 0.014(0.35)$
Tolerance : x.xx ± 0.02 (x.xx ± 0.5)
x.xxx ± 0.01 (x.xx ± 0.25)

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.



PIN CONNECTION

PIN	Define
1	- INPUT
2	ON/OFF
3	+ INPUT
4	- OUTPUT
5	- SENSE
6	TRIM
7	+ SENSE
8	+ OUTPUT

PRODUCT OPTIONS TABLE

Option	Suffix
Negative remote ON/OFF logic, 0.20" pin length (standard)	-
Negative remote ON/OFF logic, 0.145" pin length	-L
Negative remote ON/OFF logic, 0.11" pin length	-K
Positive remote ON/OFF logic, 0.20" pin length	-P
Positive remote ON/OFF logic, 0.145" pin length	-S
Positive remote ON/OFF logic, 0.11" pin length	-M

Example : QEB125-48S3P3-P