


COLOR TV HORIZONTAL OUT PUT
APPLICATIONS (DAMPER DIODE BUILT IN)HIGH Collector-Base Voltage $V_{CBO} = 1500V$ ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ C$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO}	1500	V
Collector-Emitter Voltage	V_{CEO}	800	V
Emitter-Base Voltage	V_{EBO}	7	V
Collector Current	I_C	5	A
Collector Current (Peak)	I_C	16	A
Collector Dissipation ($T_c = 25^\circ C$)	P_C	120	W
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature	T_{stg}	$-55 \sim 150$	$^\circ C$

TO-3P

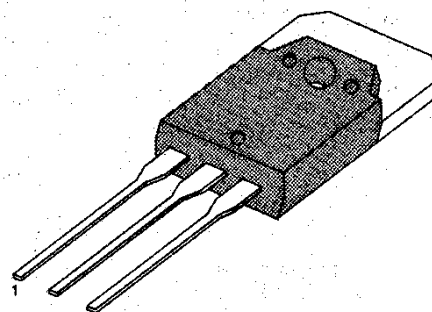

1. Base 2. Collector 3. Emitter

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 800V, I_E = 0$			10	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 4V, I_C = 0$	40		130	mA
DC Current Gain	h_{FE}	$V_{CE} = 5V, I_C = 1A$	8			
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 4A, I_B = 0.8A$			5	V
Base Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 4A, I_B = 0.8A$			1.5	V
Current Gain Bandwidth Product	f_T	$V_{CE} = 10V, I_C = 1A$		3		MHz
Damper Diode Turn On Voltage	V_f	$I_f = 5A$			2	V
Fall Time	t_f	$I_C = 4A, I_{B1} = 0.8A$ $I_{B2} = -1.6A, V_{CC} = 200V$ $R_L = 50\Omega$			0.4	μS

