

Gas Tube Coaxial Surge Protector

P8AX Series



The P8AX series coaxial surge protectors have been designed to protect antennas, microwaves, broadband applications, two-way radios, cellular equipment and GPS equipment against lightning surges and electrical transients. They are a first line of defense for your sensitive equipment.

The P8AX series employ a patented gas tube and are available with three grounding options, M6 ground screw, bulkhead or optional mounting bracket.

Applications

- Tower Mounted Amplifiers (TMA)
- Global Positioning Systems (GPS)
- Antenna Systems
- Tower Top Electronics (TTE)
- Transmitters and Receivers
- WIFI
- Broadband Wireless

Connector	0.5 Ghz	1 Ghz	4 Ghz
N	<-25dB <0.05dB	<-25dB <0.03dB	<-20dB <-0.29dB
BNC	<-25dB <0.05dB	<-25dB <0.03dB	<-20dB <-0.29dB

Ordering information

P8AX -	-	-	(/)	Gender type
Max Power:	09 - 70W	25 - 500W	50 - 1kW	
Connector Type:	N	BNC	TNC	
	SMA	7/16	F	
	*add W for bulkhead			

High-Frequency Surge Protection

- 20kA transient amps protection (8/20μs)
- 5kA transient amps protection (10/350μs)
- DC Pass to +/-48V
- VSWR < 1.2
- Insertion Loss < 0.1dB
- Bi-directional, series installed
- Removable GDT

Specifications

Citel Model	P8AX09	P8AX25	P8AX50
Max Power	70W	500W	1,000W
Insertion Loss	< 0.1dB	< 0.1dB	< 0.1dB
Ipeak (8/20μs x 10)	20kA	20kA	20kA
Breakdown V (100V/μs)	90-130V	200-300V	400-600V
Residual V (1kV/μs)	< 600V	< 600V	< 1000V
VWSR	< 1.2	< 1.2	< 1.2
Impedance	50 Ohms	50 Ohms	50 Ohms
Frequency Range	DC-5GHz	DC-5GHz	DC-5GHz
Housing Material	Copper Alloy with CuZnSn Finish		
Relative Humidity	0 to 100% condensing		
Operating Temp.	-40°C to +80°C		
Operating Altitude	13,000 ft (400m)		
Connection Method	Series		
Protection Type	GDT based		
Connectors	TNC, BNC, N, 7/16, SMA, F		
Earthing	M6 Screw, Bulkhead, Bracket		
Dimensions	42Wx80L (in mm)		




Gas Tube Coaxial Surge Protector

P8AX Series - Dimensional Drawings


P8AX-B-MF

BNC Male to BNC Female

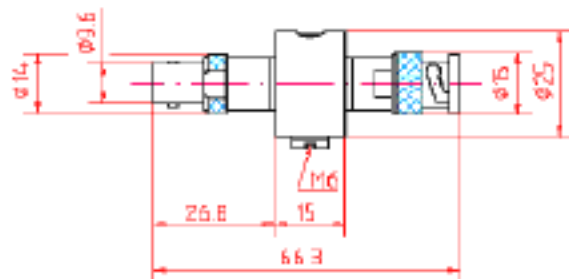


P8AX-N-MF

N Male to N Female

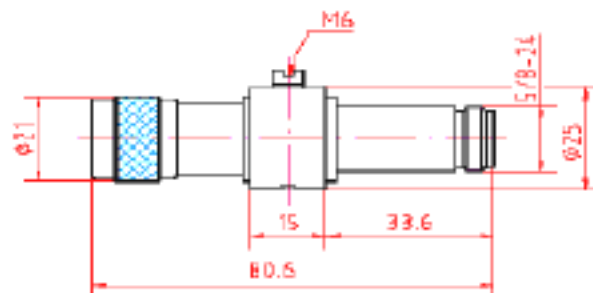


P8AX-BW-FF

BNC Bulkhead Female to BNC Female

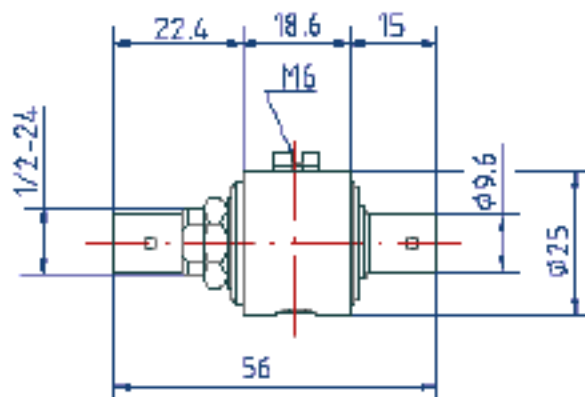


P8AX-NW-FF

N Bulkhead Female to N Female

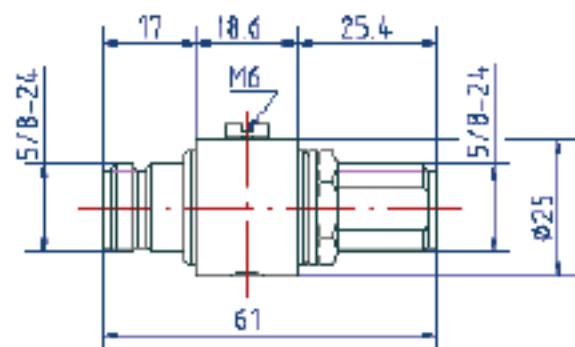


P8AX-SMAW-MF

SMA Bulkhead Male to SMA Female

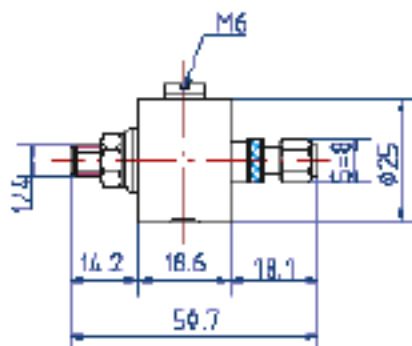


P8AX-SMAW-FF

SMA Bulkhead Female to SMA Female

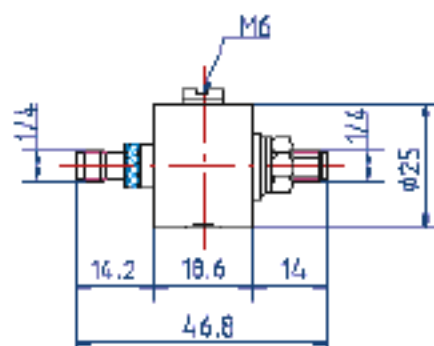

Outer Dimension Tolerance: $\pm 0.2\text{mm}$

Grounding Screw Tolerance: -0.05mm






Gas Tube Coaxial Surge Protector

P8AX Series - Dimensional Drawings


P8AX-FW-FF

F Bulkhead Female to Female

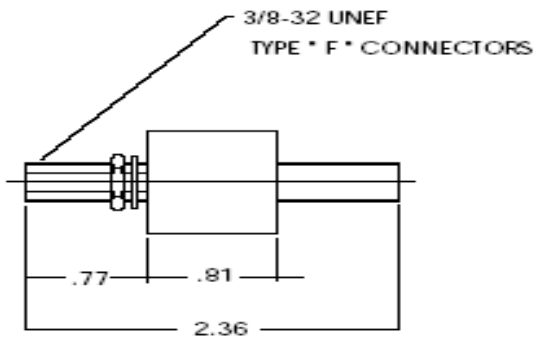

P8AX-F-MF

F Male to Female

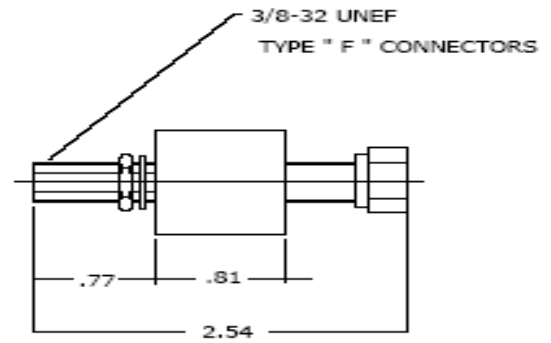

Outer Dimension Tolerance: +/- 0.2mm
Grounding Screw Tolerance: -0.05mm



Citel, Inc. 1515 N.W. 167th St, Suite 6-303 Miami, FL 33169 USA
(800) 248-3548 ♦ Tel. (305) 621-0022 ♦ Fax (305) 621-0766
www.citelprotection.com ♦ citel@citelprotection.com