


SBD Type : EA30QS06-F

■ OUTLINE DRAWING

構造 : 表面実装型、ショットキバリアダイオード(S B D)
Construction: Surface Mounting, Schottky Barrier Diode

用途 : 高周波整流用
Application : High Frequency Rectification

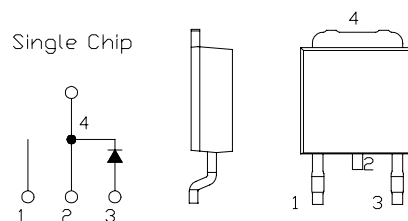

■ 最大定格 / Maximum Ratings

Approx net Weight:0.30g


Rating		Symbol	EA30QS06-F			Unit
くり返しピーク逆電圧 Repetitive Peak Reverse Voltage		V_{RRM}	60			V
非くり返しピーク逆電圧 Non-repetitive Peak Reverse Voltage		V_{RSM}	65			V
平均整流電流 Average Rectified Output Current	P.C.Board mounted *	I_0	1.3	Ta=36	50 Hz、正弦半波通電抵抗負荷 Half Sine Wave Resistive Load	A
	-		3.0	Tc=123		
実効順電流 RMS Forward Current		$I_{F(RMS)}$	4.71			A
サージ順電流 Surge Forward Current		I_{FSM}	45	50 Hz 正弦半波, 1サイクル, 非くり返し Half Sine Wave, 1cycle, Non-repetitive		A
動作接合温度範囲 Operating Junction Temperature Range		T_{jw}	- 40 ~ + 150			
保存温度範囲 Storage Temperature Range		T_{stg}	- 40 ~ + 150			

■ 電氣的・熱的特性 / Electrical・Thermal Characteristics


Characteristics		Symbol	Conditions	Min.	Typ.	Max.	Unit
ピーク逆電流 Peak Reverse Current		I_{RM}	$T_j = 25$, $V_{RM} = V_{RRM}$	-	-	3	mA
ピーク順電圧 Peak Forward Voltage		V_{FM}	$T_j = 25$, $I_{FM} = 3A$	-	-	0.58	V
熱抵抗 Thermal Resistance	接合部・周囲間 Junction to Ambient	$R_{th(j-a)}$	P.C.Board mounted *	-	-	80	/W
	接合部・ケース間 Junction to Case	$R_{th(j-c)}$	-	-	-	6	/W

* Print Land = 20 × 20 mm


EA30QS06F外形図 (mm)

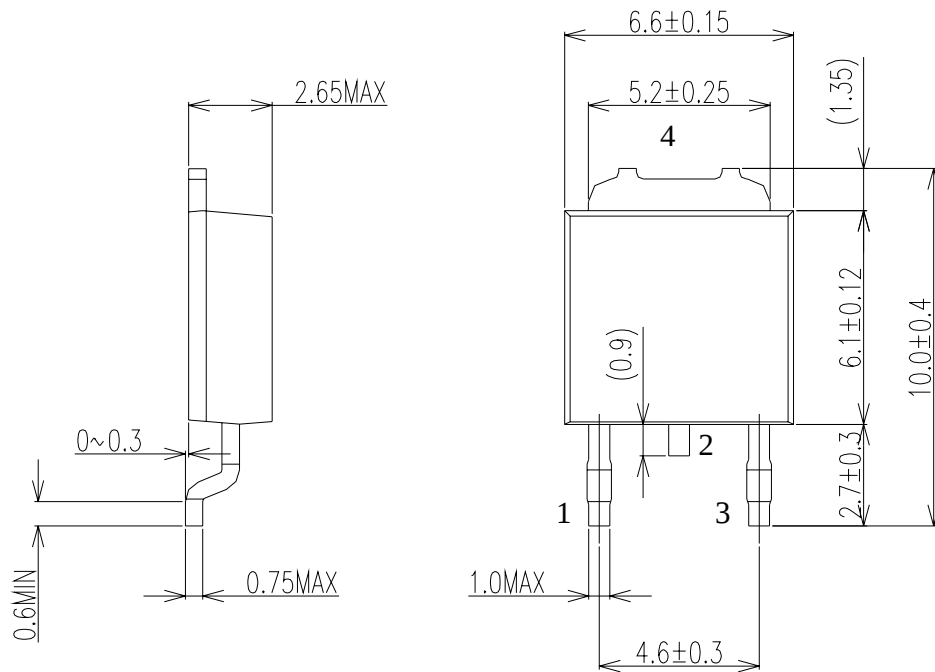



Soldering PAD

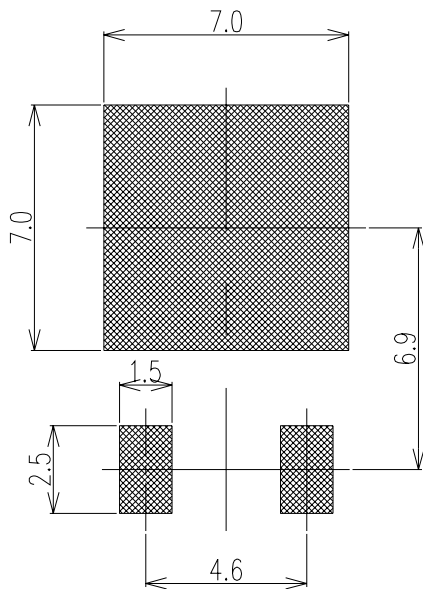


Single



順電壓特性
FORWARD CURRENT VS. VOLTAGE

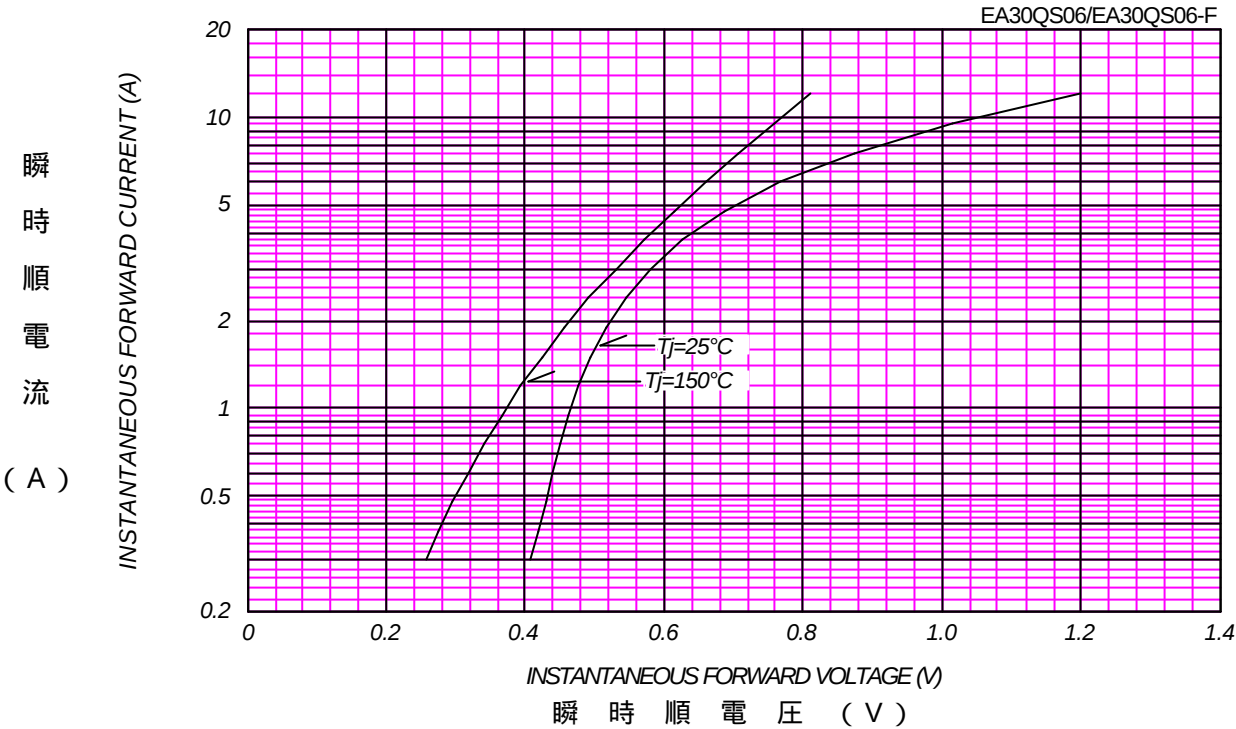

平均順電力損失特性
AVERAGE FORWARD POWER DISSIPATION

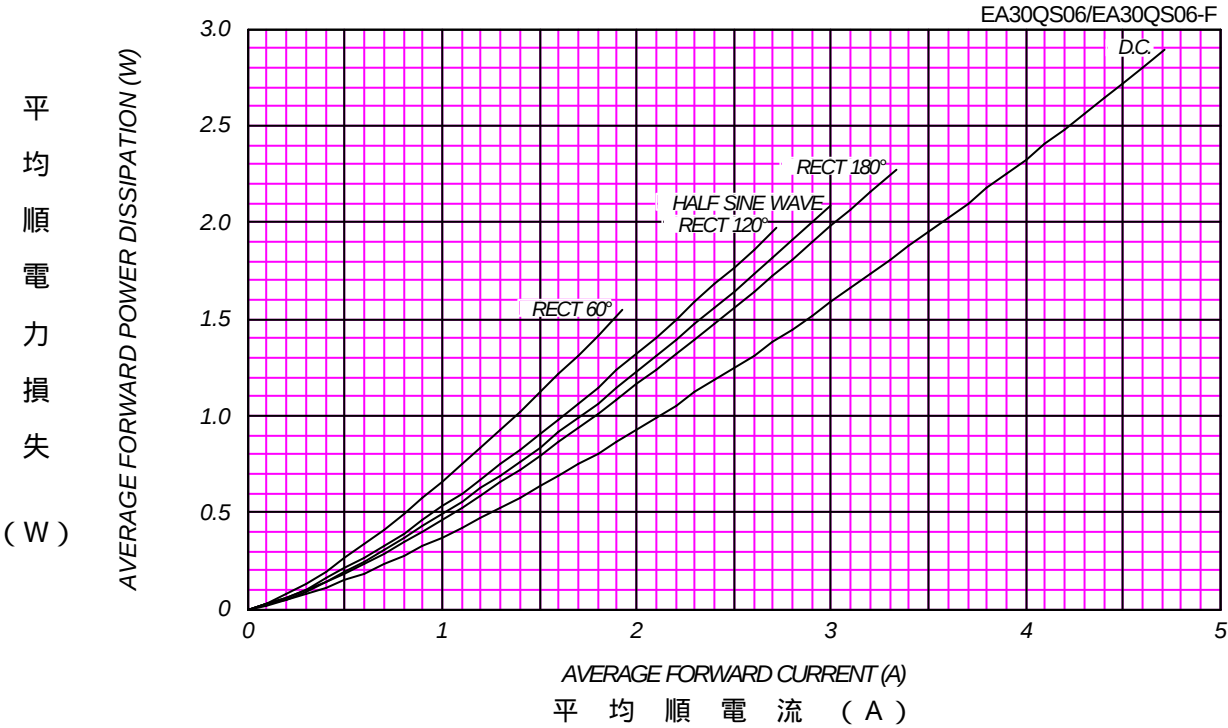


ピーク逆電流 - ピーク逆電圧特性
PEAK REVERSE CURRENT VS. PEAK REVERSE VOLTAGE

Tj= 150 °C

EA30QS06/EA30QS06-F

ピーク逆電流
(mA)

PEAK REVERSE CURRENT (mA)

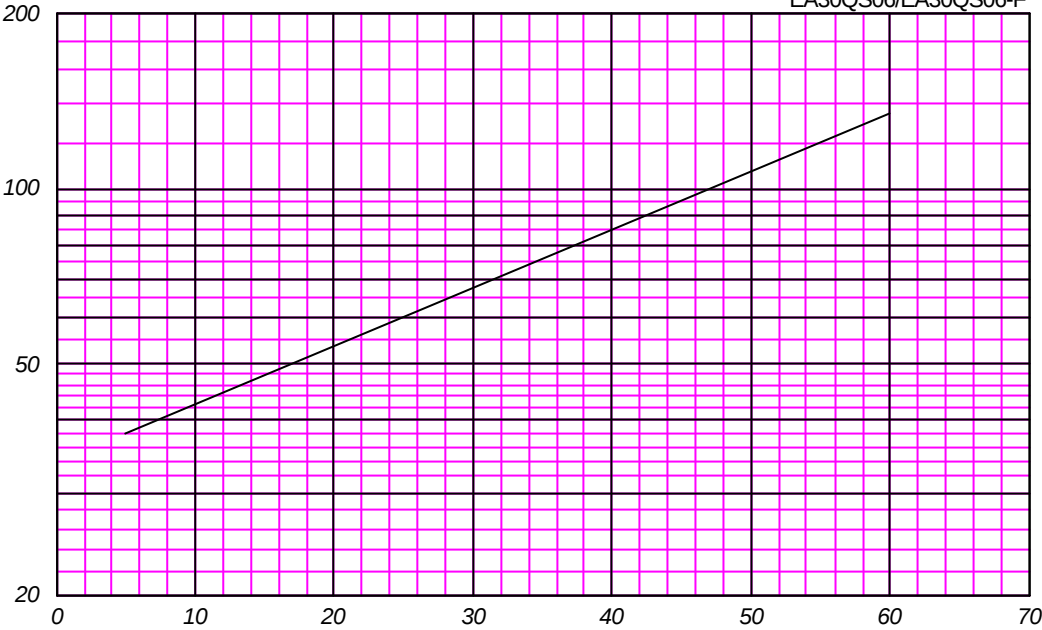


ピーク逆電圧 (V)

平均逆電力損失
AVERAGE REVERSE POWER DISSIPATION


EA30QS06/EA30QS06-F

平均逆電力損失
(W)

AVERAGE REVERSE POWER DISSIPATION (W)


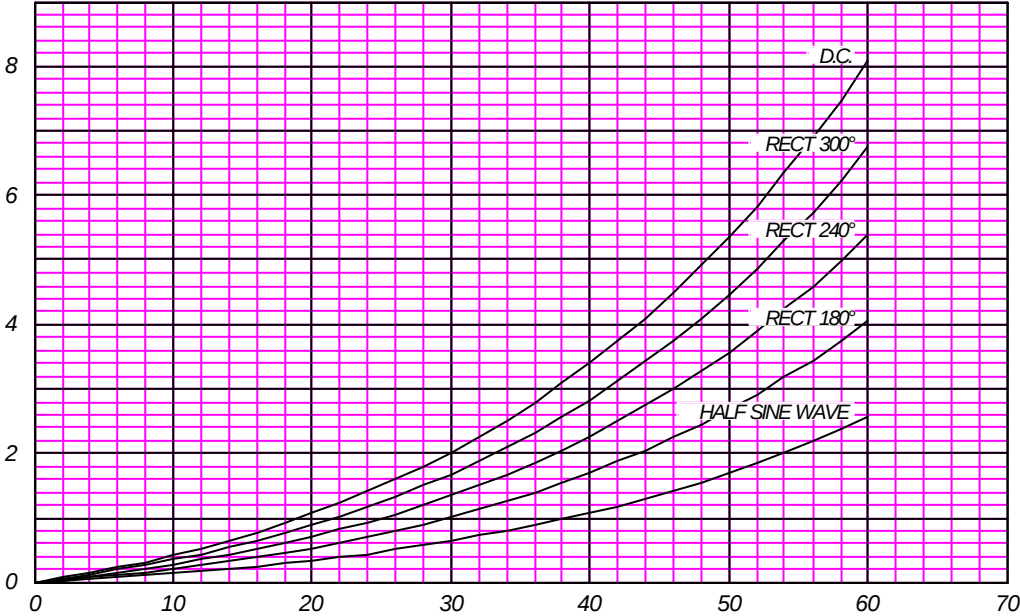


逆電圧 (V)




平均順電流 - ケース温度定格 AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

$V_{RM}=60V$

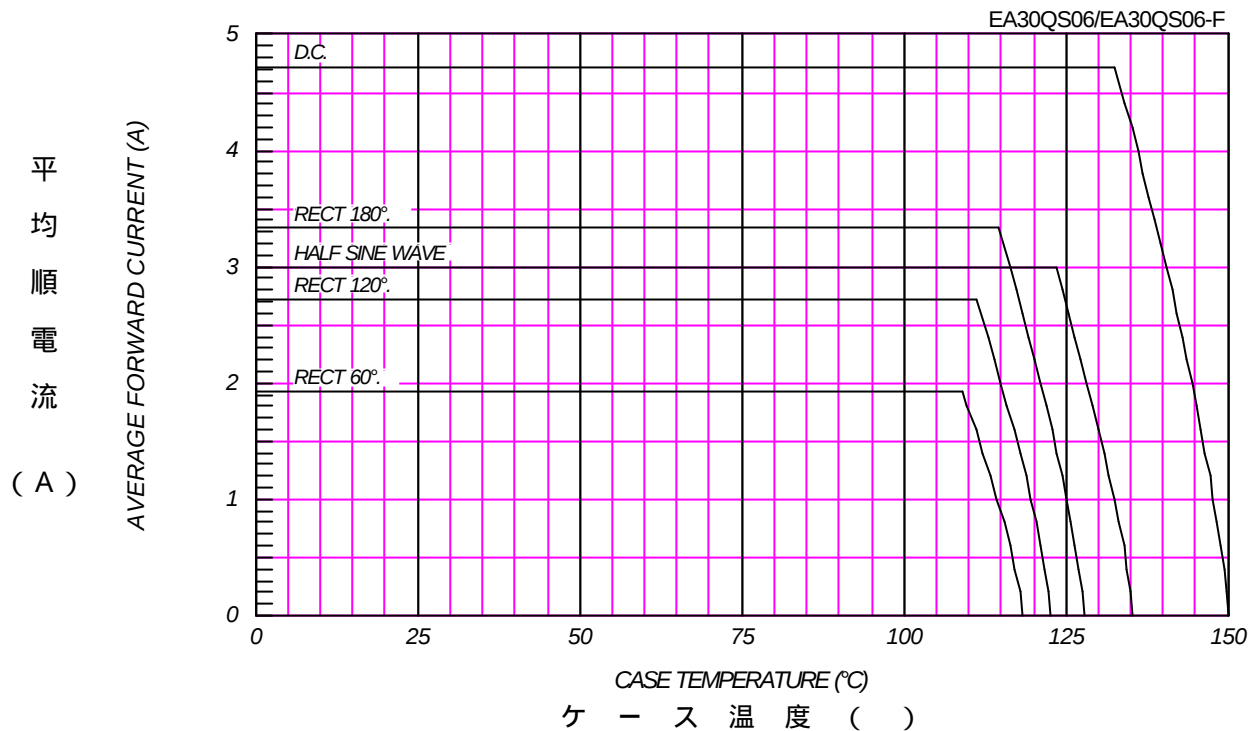

平均順電流 - 周囲温度定格 AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE

P.C. Board mounted (Print land=20×20mm)

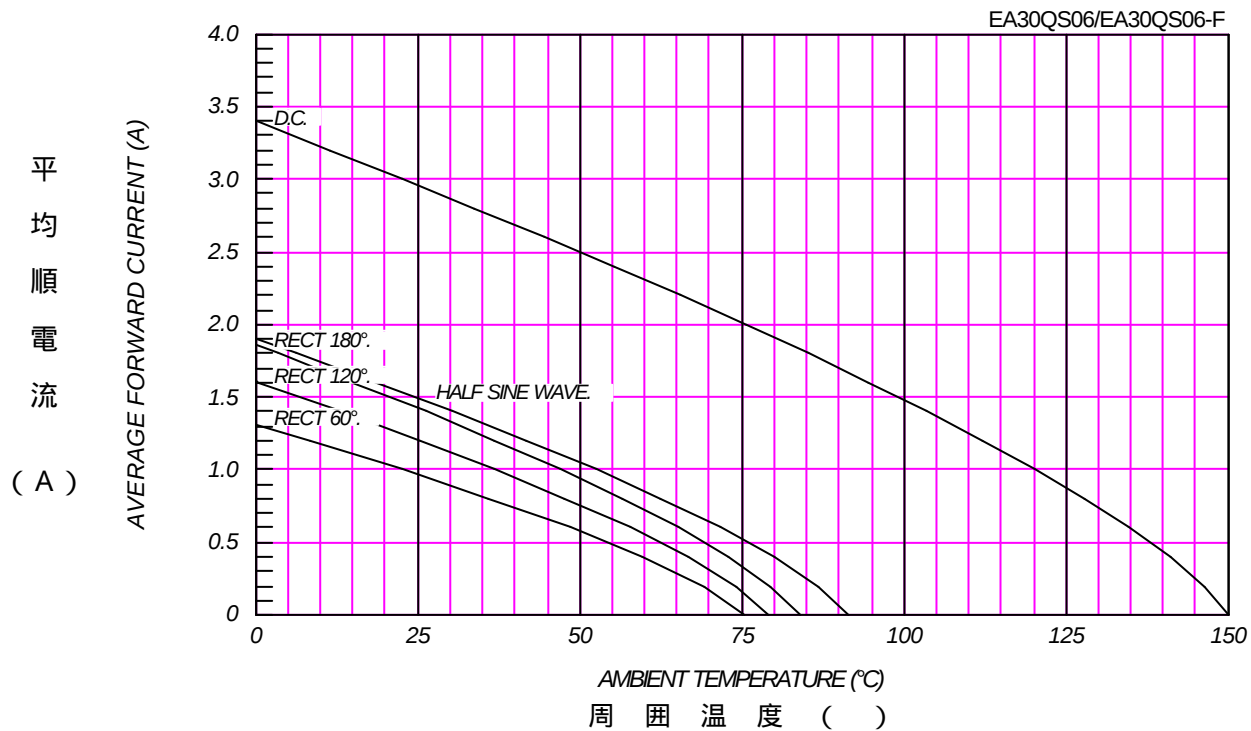


サージ順電流定格 SURGE CURRENT RATINGS

f=50Hz,Sine Wave,Non-Repetitive,No Load

EA30QS06/EA30QS06-F

サ
ー
ジ
順
電
流

(A)

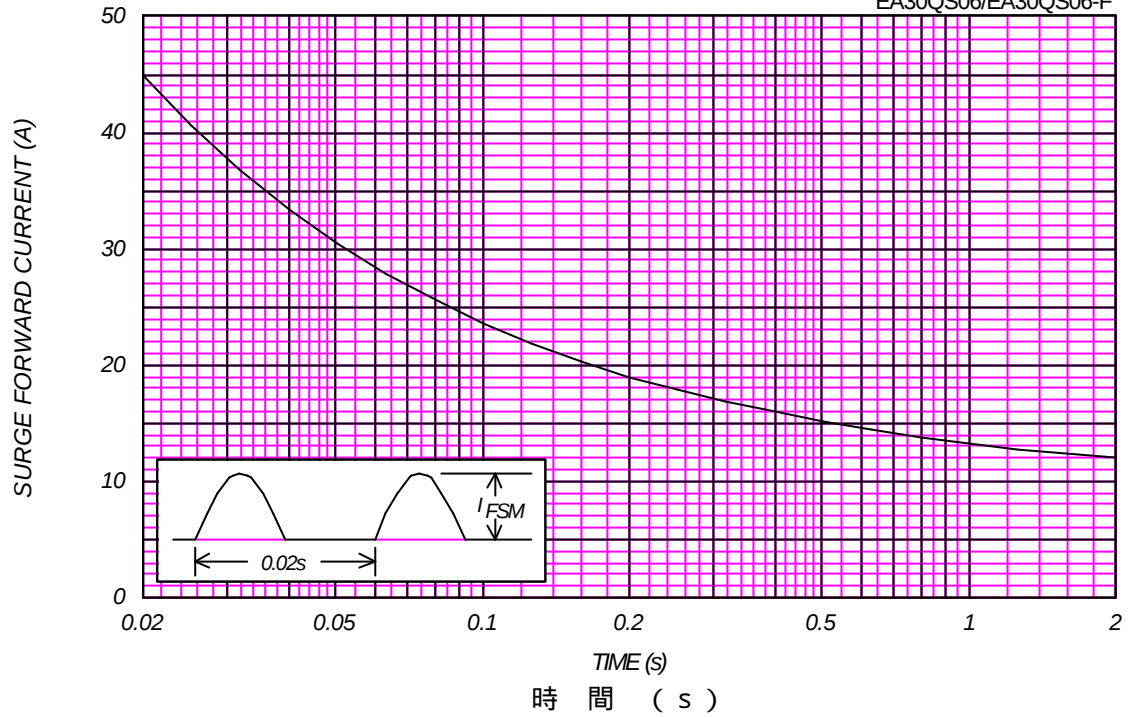

接合容量特性 JUNCTION CAPACITANCE VS. REVERSE VOLTAGE

T_j=25°C,V_m=20mV_{RMS},f=100kHz,Typical Value

EA30QS06/EA30QS06-F

接
合
容
量

(p F)

