


- Low-Cost TV Color-Burst Crystal Sine-Wave Input Produces Highly Accurate and Stable Tones
- Device Powered Directly by Telephone or Small Batteries
- Keyboard or Electronic Input Capability
- Dual-Tone and Single-Tone Capability
- Minimal Standby Power Requirement
- Total Harmonic Distortion Meets Industry Standards
- PEP3 Processing Available
- Wide Supply-Voltage Range
- Minimal Parts Required
- Single-Tone Production Can Be Inhibited
- Auxiliary Switching Outputs: One Bipolar Transistor and One CMOS Gate
- Mute Output Can Switch at $V_{DD} \geq 1.7\text{ V}$
- Designed to be Interchangeable with Mostek MK5094

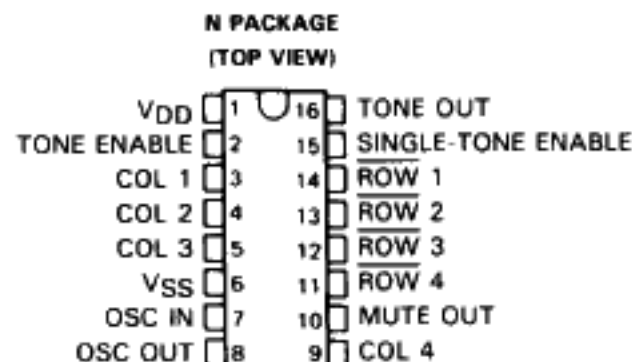

NOT RECOMMENDED FOR NEW DESIGN

description

The TCM5094 tone encoder is a CMOS integrated circuit designed specifically to generate the dial tones used in dual-tone telephone dialing systems. It requires a sine-wave input normally supplied by a low-cost TV color-burst crystal at 3.579545 MHz to generate eight different audio sinusoidal frequencies. With this input, the encoder generates dial tones that are very low in total harmonic distortion and comply with standard Dual-Tone Multi-Frequency (DTMF) specifications without any need for frequency adjustment.

When generating a dual-tone signal, the encoder generates one column tone and one row tone and adds them for its output. The table below presents the frequencies produced by the tone encoder with the 3.579545-MHz TV-crystal signal input. Any deviation in this frequency will be reflected in the frequency output. The tolerance of the crystal is normally 0.02%.

| TONE | DTMF STANDARD (Hz) | ENCODER OUTPUT* (Hz) | ERROR FROM STANDARD* (%) |
|----------|--------------------------|----------------------------|--------------------------------|
| Row 1 | 697 | 701.3 | +0.62 |
| Row 2 | 770 | 771.4 | +0.19 |
| Row 3 | 852 | 857.2 | +0.61 |
| Row 4 | 941 | 935.1 | -0.63 |
| Column 1 | 1209 | 1215.9 | +0.57 |
| Column 2 | 1336 | 1331.7 | -0.32 |
| Column 3 | 1477 | 1471.9 | -0.35 |
| Column 4 | 1633 | 1645 | +0.73 |

*Using an input signal from a 3.579545-MHz crystal.



Caution. These devices have limited built-in gate protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1990, Texas Instruments Incorporated

TCM5094 TONE ENCODER

operation

keyboard and electronic inputs

The specific tone or tones generated are determined by inputs designated $\overline{\text{ROW}}$ 1 through $\overline{\text{ROW}}$ 4 and $\overline{\text{COLUMN}}$ 1 through $\overline{\text{COLUMN}}$ 4. The inputs are normally received from a 2-of-8 DTMF (DPST) keyboard, a Class A (SPST) keyboard, or an electronic circuit. Unlike dynamic or scanned inputs, the static inputs of the TCM5094 do not generate any noise. See function table for input and output description.



single-tone enable input

This input inhibits the generation of single tones when taken low. However, all other chip functions remain unchanged. If the input is high or left open, single-tone operation is enabled.


tone-enable input

A low logic level at this input inhibits tone generation of the encoder. Other chip functions remain unchanged.

mute output

The mute output is high when any column input is active and is low when all column inputs are inactive. The mute output operates with V_{DD} as low as 1.7 V.

functional block diagram

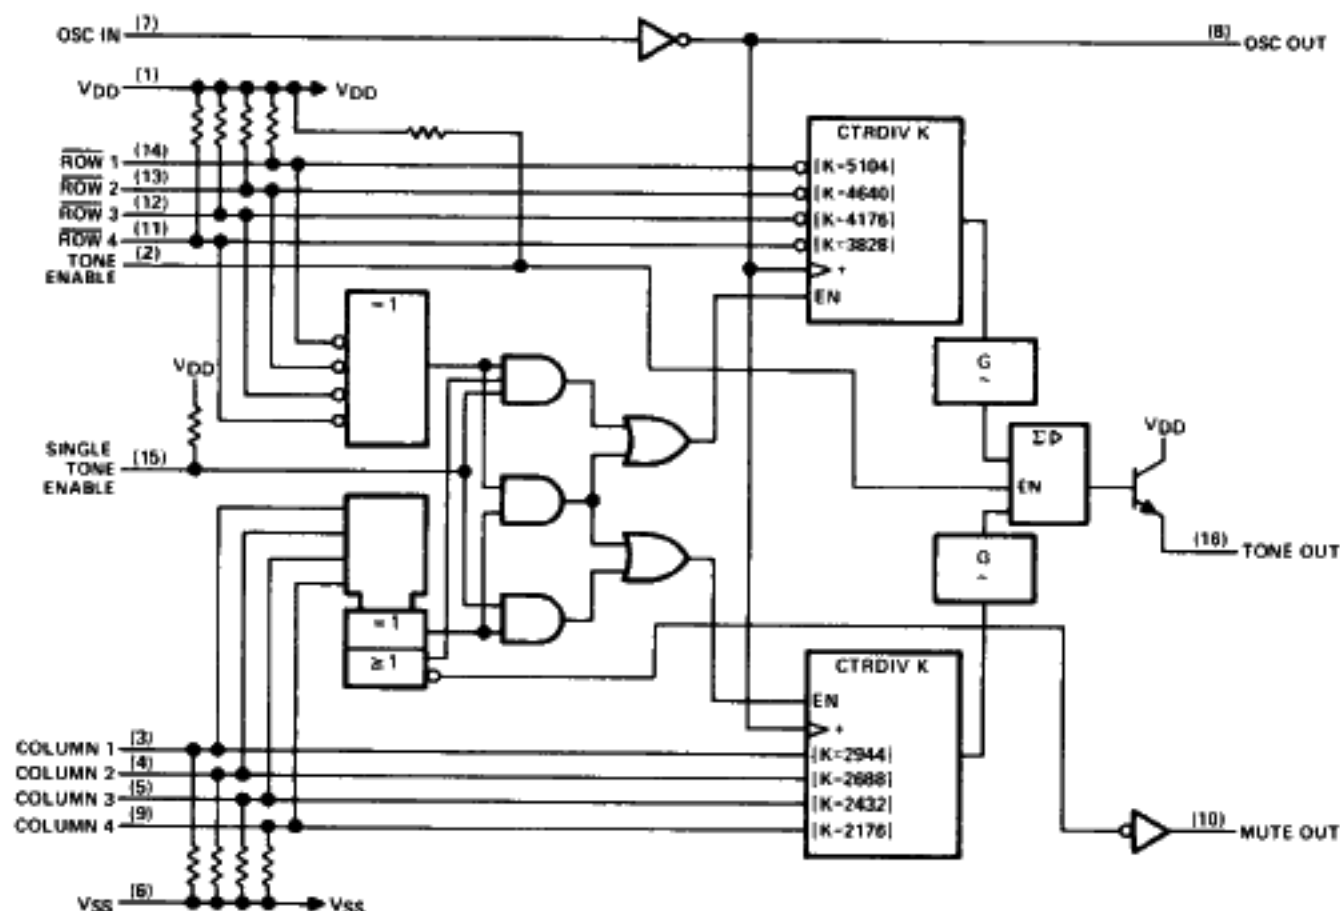

TONE ENCODER FUNCTION TABLE

| INPUT COMBINATIONS† | TONE OUTPUT | | | MUTE OUTPUT |
|-------------------------------------|------------------------------|---|----------------------------|-------------|
| | PIN 2 OPEN,‡ PIN 15 OPEN‡ | PIN 2 OPEN,‡ PIN 15 AT V _{SS} ‡ | PIN 2 AT V _{SS} ‡ | |
| 0 rows 0 columns | 0 | 0 | 0 | L |
| 1 row 1 column | Row and column | Row and column | 0 | H |
| 2 or more rows 1 column | Column | 0 | 0 | H |
| 1 row 2 or more columns | Row | 0 | 0 | H |
| 2 or more rows 2 or more columns | 0 | 0 | 0 | H |
| 0 rows 1 column | Column | 0 | 0 | H |
| 0 rows 2 or more columns | 0 | 0 | 0 | H |
| 1 or more rows 0 columns | 0 | 0 | 0 | L |


†Row inputs will be active (on) when the input voltage is at a low level ($V_I \leq V_{IL}$), and column inputs are active at a high input level. Under keyboard control, connecting a row input to a column input will activate both.

‡Pin 15 is the single-tone enable input; pin 2 is the tone enable input.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | |
|--|-----------------------------------|
| Supply voltage V _{DD} (see Note 1) | 13.5 V |
| Input voltage range | -0.3 V to V _{DD} + 0.3 V |
| Output voltage range | -0.3 V to V _{DD} + 0.3 V |
| Continuous power dissipation at 25°C free-air temperature (see Note 2) | 1150 mW |
| Operating free-air temperature range | -30°C to 70°C |
| Storage temperature range | -55°C to 150°C |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C |

NOTES: 1. All voltage values are with respect to the V_{SS} terminal.
2. For operation above 25°C free-air temperature, see the Dissipation Derating Curve.

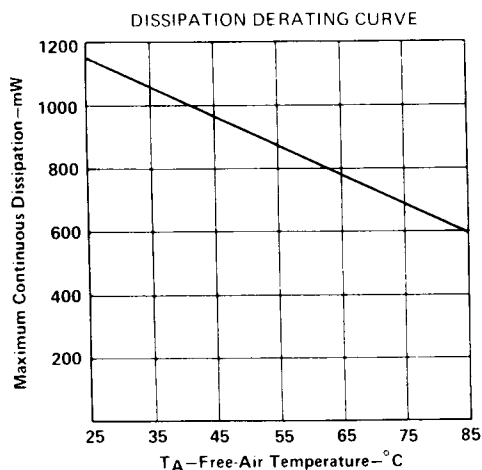

TCM5094 TONE ENCODER

recommended operating conditions

| | | MIN | NOM | MAX | UNIT |
|--|---------------------|--------------|-----|--------------|--------------------|
| Supply voltage, V_{DD} | | 3.5 | | 10 | V |
| High-level input voltage, V_{IH} | Row inputs (off) | $0.9 V_{DD}$ | | V_{DD} | V |
| | All other inputs | $0.7 V_{DD}$ | | V_{DD} | |
| Low-level input voltage, V_{IL} | Column inputs (off) | V_{SS} | | $0.1 V_{DD}$ | V |
| | All other inputs | V_{SS} | | $0.3 V_{DD}$ | |
| Contact resistance between row and column inputs | | | | 1000 | Ω |
| Tone-output load resistance, R_L | | 120 | 330 | 620 | Ω |
| Operating free-air temperature, T_A | | -30 | | 70 | $^{\circ}\text{C}$ |

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | MAX | UNIT |
|--------------|--|---|-----|------|---------------|
| V_{OH} | High-level output voltage, mute output | $V_{DD} = 1.7 \text{ V}$, $I_{OH} = 0.2 \text{ mA}$ | 1 | | V |
| | | $V_{DD} = 10 \text{ V}$, $I_{OH} = 0.5 \text{ mA}$ | 9 | | |
| V_{OL} | Low-level output voltage, mute output | $V_{DD} = 1.7 \text{ V}$, $I_{OL} = -0.2 \text{ mA}$ | | 0.5 | V |
| | | $V_{DD} = 10 \text{ V}$, $I_{OL} = -0.5 \text{ mA}$ | | 0.5 | |
| I_I | Column | $V_{DD} = 3 \text{ V}$, $V_I = 2.1 \text{ V}$ | | 130 | μA |
| | Inputs | $V_{DD} = 10 \text{ V}$, $V_I = 7 \text{ V}$ | | 545 | |
| | Row | $V_{DD} = 3 \text{ V}$, $V_I = 0.9 \text{ V}$ | | -130 | μA |
| | Inputs | $V_{DD} = 10 \text{ V}$, $V_I = 3 \text{ V}$ | | -545 | |
| I_{DDstby} | Standby supply current | $V_{DD} = 10 \text{ V}$, See Note 3 | | 200 | μA |
| I_{DDop} | Operating current | $V_{DD} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$, See Note 4 | | 10 | mA |

operating characteristics over recommended ranges of operating free-air temperature and supply voltage (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS† | MIN | MAX | UNIT |
|---------------------------------------|-------------|---|-----|------|------|
| Output rms voltage | Row tone | V _{DD} = 3.8 V, R _L = 330 Ω, T _A = 25 °C | 360 | 453 | mV |
| | | V _{DD} = 10 V, R _L = 330 Ω, T _A = 25 °C | 452 | 569 | |
| | Column tone | V _{DD} = 3.8 V, R _L = 330 Ω, T _A = 25 °C | 387 | 487 | |
| | | V _{DD} = 10 V, R _L = 330 Ω, T _A = 25 °C | 486 | 612 | |
| Preemphasis (column tone to row tone) | | T _A = 25 °C | 1 | 3 | dB |
| Output distortion | Dual-tone | V _{DD} ≥ 5 V, T _A = 25 °C, See Note 5 | | – 20 | dB |
| Quiescent tone-output power | | | | – 80 | dBm |
| Tone-output rise time (see Note 6) | | V _{DD} = 3.8 V | | 5 | ms |
| | | V _{DD} = 10 V | | 5 | |

[†] Unless otherwise noted, test conditions are: $R_L = 620 \Omega$ for $V_{DD} < 5 \text{ V}$ or $R_L = 330 \Omega$ for $V_{DD} \geq 5 \text{ V}$. Crystal parameters are the following: $f = 3.579545 \text{ MHz} \pm 0.02\%$, $R_S < 100 \Omega$, $C_L = 18 \text{ pF}$, $C_H = 5 \text{ pF}$, $C_M = 0.02 \text{ pF}$, $L_M = 96 \text{ mH}$.

NOTES: 3. Standby supply current is measured with all outputs unloaded and no inputs activated.


4. Operating supply current is measured with all outputs unloaded, one row input connected to one column input, and normal oscillator input.

5. Distortion measurements are in terms of the total out-of-band power relative to the total column and row fundamental power.

6. This is the time required for output to change from its quiescent value to 90% of its final rms value.


output waveforms

Typical row and column stairstep approximations of sinusoidal outputs are shown in Figures 1 and 2. The row and column outputs are added together resulting in a typical dual-tone waveform as shown in Figure 3. Spectral analysis of this dual-tone waveform shows that all harmonic and intermodulation distortions are typically 30 dB below the strongest column-tone fundamental.




0.2 ms/div

FIGURE 1



0.2 ms/div

FIGURE 2



0.2 ms/div

FIGURE 3

distortion considerations

The following formula is used to calculate the total harmonic distortion of a single row or a single column:

$$\text{THD} = \left(\frac{\sqrt{V_{2f}^2 + V_{3f}^2 + V_{4f}^2 + V_{5f}^2 + \dots + V_{nf}^2}}{V_{1f}} \right) \times 100\%$$

where V_{2f} is the second harmonic of the fundamental frequency V_{1f} waveform and so on. The dual-tone total harmonic distortion is:

$$\text{THD} = \left(\frac{\sqrt{V_{2R}^2 + V_{3R}^2 + \dots + V_{nR}^2 + V_{2C}^2 + \dots + V_{nC}^2 \pm V_{\text{IMD}}^2}}{\sqrt{V_{FR}^2 + V_{FC}^2}} \right) \times 100\%$$

where V_{FR} and V_{FC} are the row and column fundamental frequency waveforms, and V_{2R} and V_{2C} , etc., are the corresponding harmonics.

The total intermodulation distortion is:

$$V_{\text{IMD}}^2 = (V_{1R} + V_{1C})^2 + (V_{1R} - V_{1C})^2 + \dots + (V_{nR} + V_{nC})^2 + (V_{nR} - V_{nC})^2$$

A relatively simple method of distortion measurement uses a spectrum analyzer to relate the harmonics to the fundamental frequency waveform. The tone encoder spectrum indicates the harmonics and intermodulation distortion at least 30 dB down relative to the column tone.

Another method for distortion measurement of the dual-tone waveform is to compare the total power in the fundamental frequencies with the total power in the various harmonics plus intermodulation on a signal analyzer. The encoders provide an output distortion of -20 dB maximum when operated between 3.5 V and 10 V. If operated between 3 V and 3.5 V, some clipping occurs at the output causing the distortion to exceed the -20 dB level.