
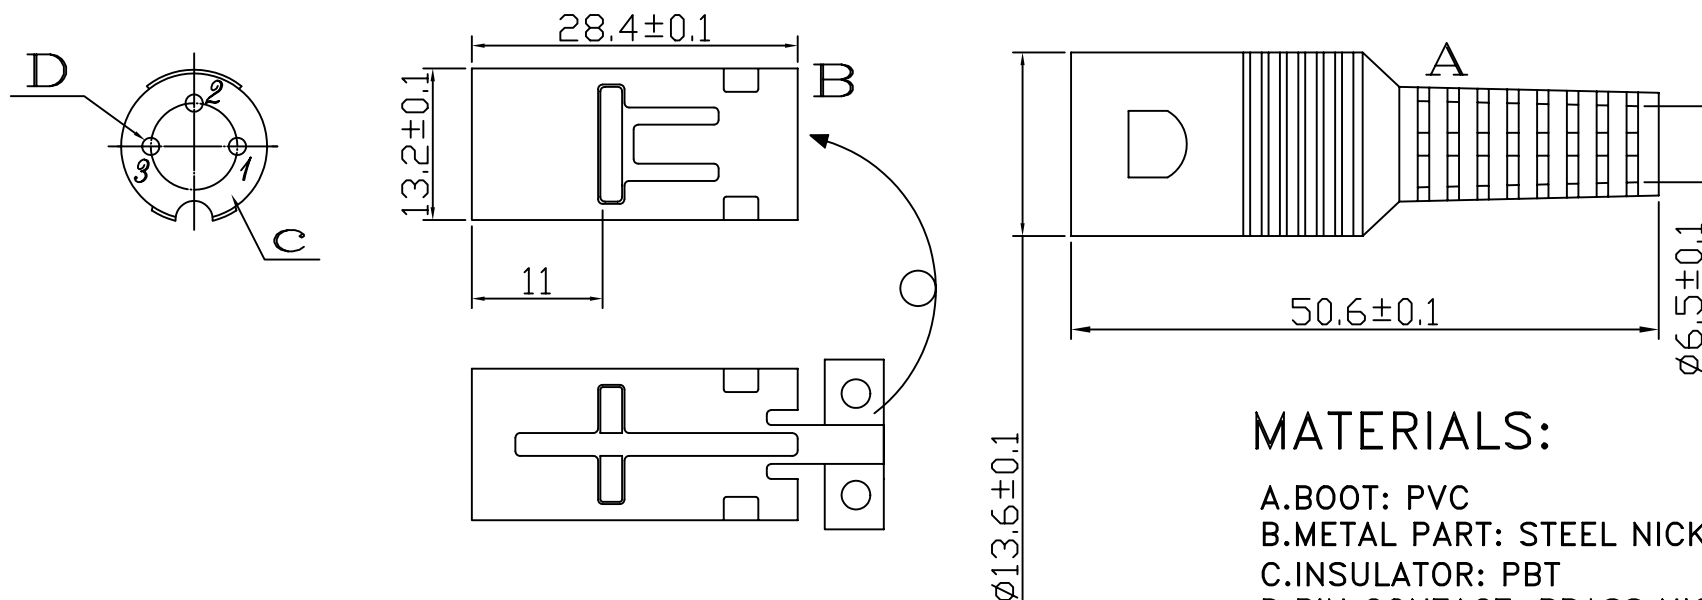


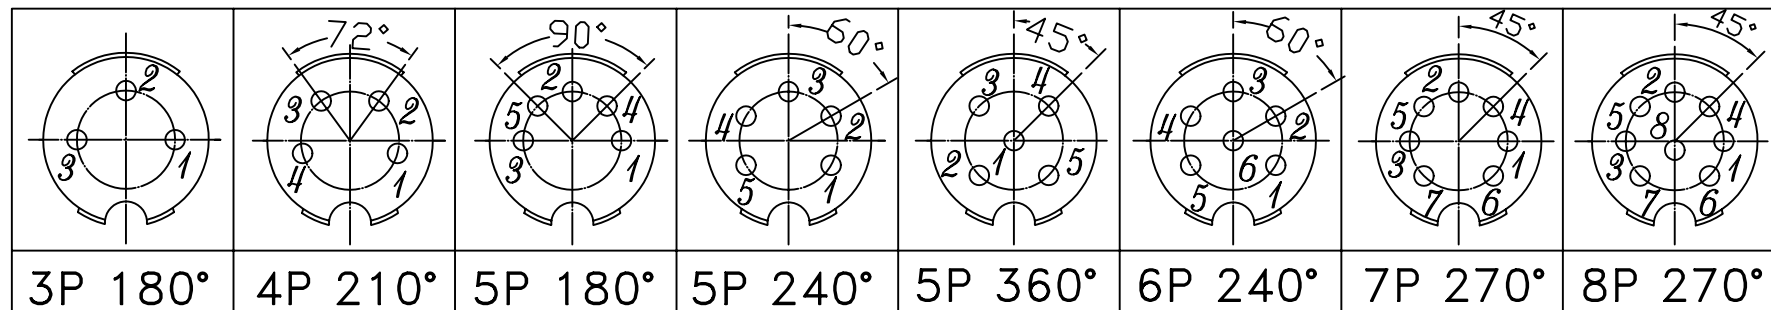

MATERIALS:

A.BOOT: PVC
 B.METAL PART: STEEL NICKEL PLATED
 C.INSULATOR: PBT
 D.PIN CONTACT: BRASS NICKEL PLATED

SPECIFICATIONS:

1.RATING:100V AC AT 1A
 2.INSULATION RESISTANCE:
 OVER 100M IHM AT 500V DC
 3.DIELECTRIC STRENGTH:
 250V AC FOR ONE MINUTE

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫有限公司

PART NO. DA-P-xx

DWG NO. DA-P-xx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X
 .XX
 .XXX
 AWG

DESCRIP TION:

DIN PLUG ASS'Y TYPE

AREA

REVISIONS

HK

DATE