


VOLTAGE RANGE: 50 - 1000V
CURRENT: 2.0 A

Features


- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- Ideal for Printed Circuit Boards

Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Body
- Weight: 1.3 grams (approx.)
- Mounting Position: Any
- Marking: Type Number



WOB

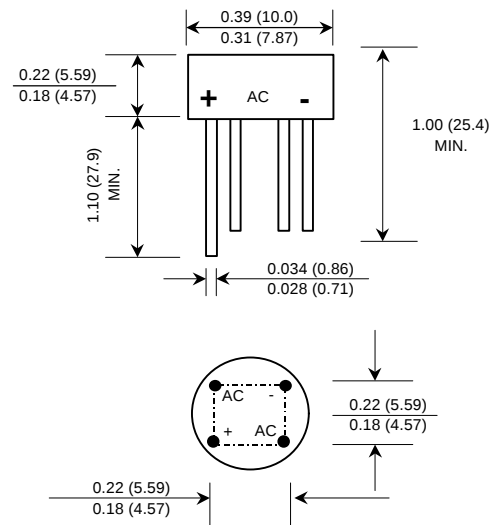

Dimension in inches and (millimeter)

Maximum Ratings and Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	2W005	2W01	2W02	2W04	2W06	2W08	2W10	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current 0.375" (9.5 mm) lead length $T_c = 25^\circ\text{C}$	$I_{F(AV)}$	2.0							A
Maximum Peak Forward Surge Current Single half sine wave	I_{FSM}	50							A
Rating for fusing ($t < 8.3$ ms.)	I^2t	10							A ² S
Maximum Forward Voltage per Diode at $I_F = 1.0$ A	V_F	1.0							V
Maximum DC Reverse Current $T_A = 25^\circ\text{C}$	I_R	10							μA
at Rated DC Blocking Voltage $T_A = 100^\circ\text{C}$	$I_{R(H)}$	1.0							mA
Typical Junction Capacitance per Diode (Note 1)	C_J	24							pf
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	36							$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	- 50 to + 150							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	- 50 to + 150							$^\circ\text{C}$

Notes :

- 1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
- 2) Thermal resistance from Junction to Ambient at 0.375" (9.5 mm) lead length P.C. Board with, 0.22" x 0.22" (5.5 x 5.5 mm) copper Pads.

RATING AND CHARACTERISTIC CURVES (2W005 - 2W10)

FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

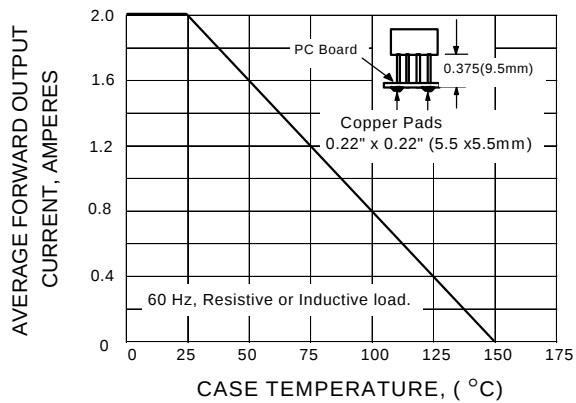


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

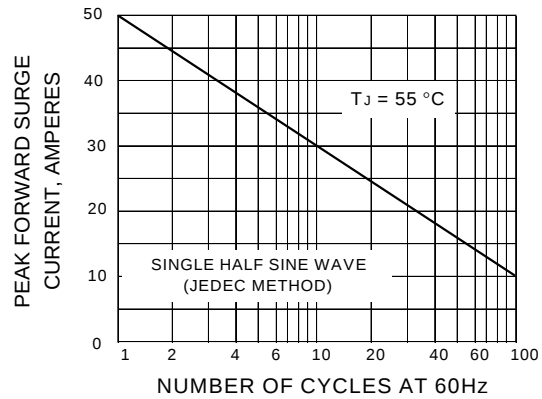


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

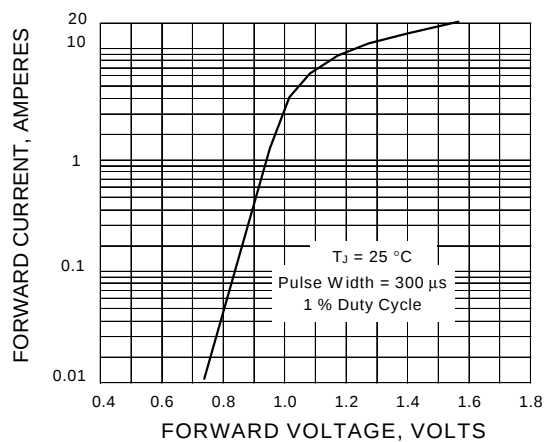


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

