



2CL2FH

PLASTIC FAST RECOVER HIGH VOLTAGE RECTIFIER

VOLTAGE RANGE: 12 KV

CURRENT: 60mA

Features


- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage

Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power



Outline Drawings : mm

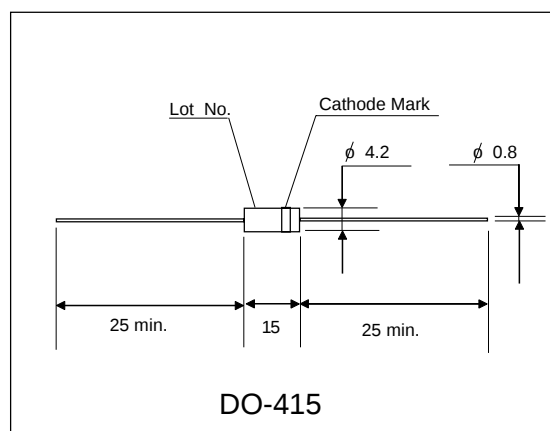

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Characteristic	Symbols	2CL2FH	Units
Repetitive Peak Reverse Voltage	V_{RRM}	12	kV
Average Output Current T_a=25°C, Resistive Load	I_O	60	mA
Surge Current	I_{FSM}	10	A
Maximum Forward Voltage Drop at 25°C, $I_F = I_{F(AV)}$	V_F	20	V
Maximum Reverse Current at 25°C at 100°C	V_{RRM}	2.0	uA
		50	uA
Maximum Reverse Recovery Time at 25°C	T_{rr}	150	nS
Junction Capacitance at 25°C, $V_R=0V, f=1MHz$	C_j	15	pF
Junction Temperature	T_J	125	°C
Allowable Operation Case Temperature	T_C	125	°C
Storage Temperature	T_{stg}	-40 to +125	°C