



ESJA20-20A

PLASTIC FAST RECOVER HIGH VOLTAGE RECTIFIER


VOLTAGE RANGE: 20 KV
CURRENT: 20 mA

Features

- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power

Outline Drawings : mm

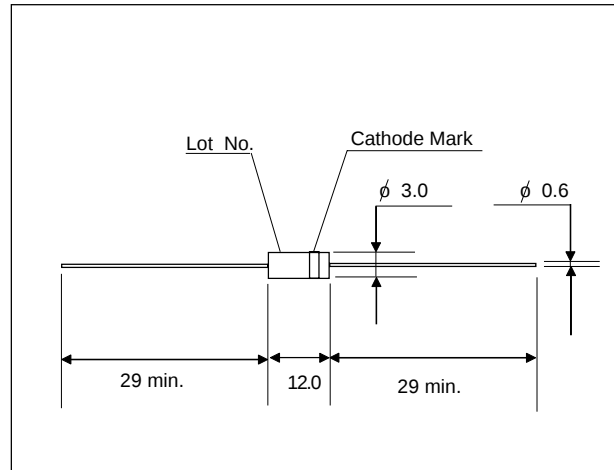

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Characteristic	Symbols	ESJA20-20A	Units
Repetitive Peak Reverse Voltage	V_{RRM}	20	kV
Average Output Current Ta=25°C, Resistive Load	I_o	20	mA
Surge Current	I_{FSM}	1.0	A
Maximum Forward Voltage Drop at 25°C, $I_F = I_{F(AV)}$	V_F	45	V
Maximum Reverse Current at 25°C at 100°C	V_{RRM}	3.0	uA
		30	uA
Maximum Reverse Recovery Time at 25°C	T_{rr}	100	nS
Junction Capacitance at 25°C, $V_R = 0V$, $f = 1MHz$	C_j	1.0	pF
Junction Temperature	T_j	125	°C
Allowable Operation Case Temperature	T_c	125	°C
Storage Temperature	T_{stg}	-40 to +125	°C