

Features


- High switching speed: max. 4 ns
- Continuous reverse voltage: max. 75 V
- Repetitive peak reverse voltage: max. 75 V
- Repetitive peak forward current: max. 450 mA

Mechanical Data

- Case: DO-35, glass case
- Polarity: Color band denotes cathode
- Weight: 0.004 ounces, 0.13 grams



DO-35(GLASS)

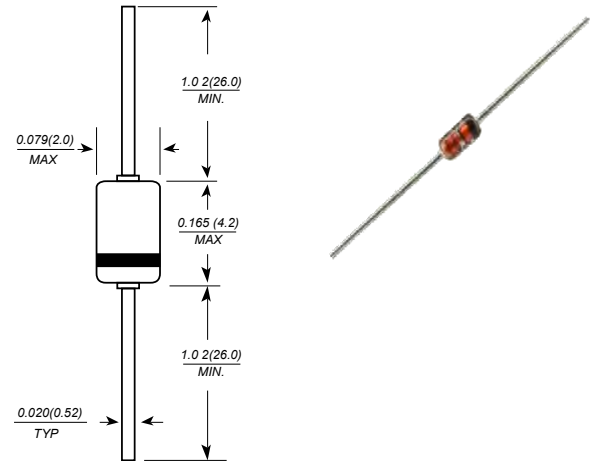

Dimensions in millimeters

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	75	V
Maximum Continuous Reverse Voltage	V_{RM}	75	V
Maximum Continuous Forward Current	I_F	250	mA
Maximum Power Dissipation	P_D	350	mW
Maximum Repetitive Peak Forward Current	I_{FRM}	450	mA
Maximum Non-repetitive Peak Forward Current at $t = 1\text{s}$	I_{FSM}	0.5	A
Maximum Junction Temperature	T_J	200	$^\circ\text{C}$
Storage Temperature Range	T_S	-65 to + 200	$^\circ\text{C}$

Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Current	I_R	$V_R = 75\text{ V}$	-	-	5	μA
		$V_R = 75\text{ V}, T_J = 150^\circ\text{C}$	-	-	100	
Forward Voltage	V_F	$I_F = 100\text{ mA}$	-	-	1.0	V
Diode Capacitance	C_d	$f = 1\text{ MHz}; V_R = 0$	-	-	2.0	pF
Reverse Recovery Time	T_{rr}	$I_F = 10\text{ mA to } I_R = 10\text{ mA}$ $R_L = 100\ \Omega$; measured at $I_R = 1\text{ mA}$	-	-	4	ns



RATING AND CHARACTERISTIC CURVES (BAW62)

FIG. 1 MAXIMUM PERMISSIBLE CONTINUOUS FORWARD CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE.

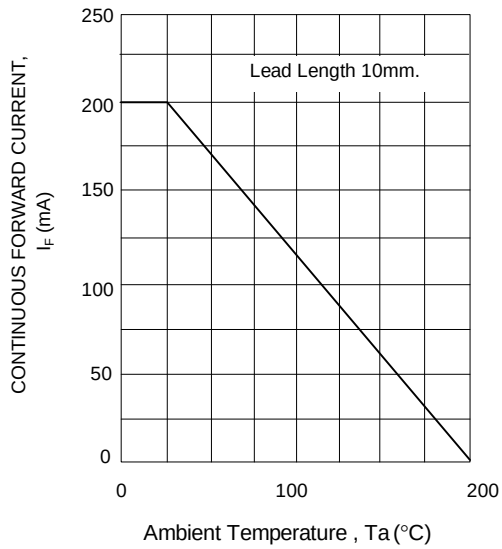


FIG. 2 TYPICAL FORWARD VOLTAGE

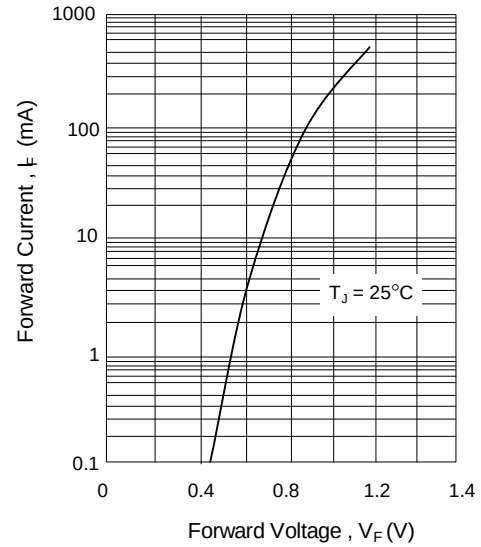


FIG. 3 TYPICAL DIODE CAPACITANCE AS A FUNCTION OF REVERSE VOLTAGE

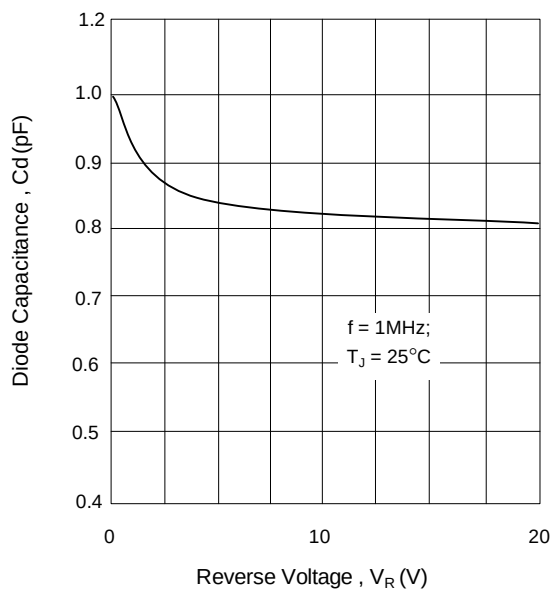


FIG. 4 TYPICAL REVERSE CURRENT VS JUNCTION TEMPERATURE

