

VOLTAGE RANGE: 200 - 1300V


CURRENT: 3.0 A

Features

- The plastic package carries Underwriters Laboratory
- Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

- Case: DO-201AD, Molded Plastic
- Terminals: Axial Leads, Solderable per MIL-STD-202 Method 208
- Polarity: Color Band Denotes Cathode
- Approx. Weight: 1.1 grams
- Mounting Position: Any

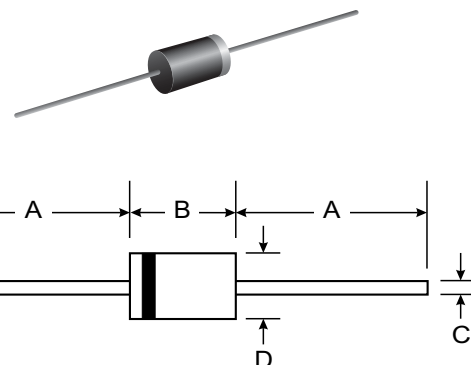

DO-201AD		
Dim	Min	Max
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	BY251	BY252	BY253	BY254	BY255	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	200	400	600	800	1300	VOLTS
Maximum RMS voltage	V _{RMS}	140	280	420	560	910	VOLTS
Maximum DC blocking voltage	V _{DC}	200	400	600	800	1300	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at T _A =75°C	I _(AV)	3.0					Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150					Amps
Maximum instantaneous forward voltage at 3.0A	V _F	1.1					Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	10.0 500					uA
Typical junction capacitance (NOTE 1)	C _J	30.0					pF
Typical thermal resistance (NOTE 2)	R _{θJA}	20.0					°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +175					°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES BY251 THRU BY255

