

**VOLTAGE RANGE: 20 - 100V**



**CURRENT: 0.5 A**

### Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High forward surge current capability
- High temperature soldering guaranteed:  
250°C/10 seconds, 0.375(9.5mm) lead length, 5 lbs. (2.3kg) tension

### Mechanical Data

- Case: JEDEC SOD-123FL molded plastic body over passivated junction
- Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.0007 ounce, 0.02 grams

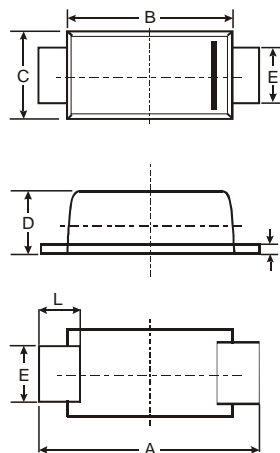

SOD-123FL			
Dim	Min	Max	Typ
A	3.58	3.72	3.65
B	2.72	2.78	2.75
C	1.77	1.83	1.80
D	1.02	1.08	1.05
E	0.097	1.03	1.00
H	0.13	0.17	0.15
L	0.53	0.57	0.55
All Dimensions in mm			

### Maximum Ratings and Electrical Characteristics T<sub>A</sub> = 25°C unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	SS0520FL	SS0530FL	SS0540FL	SS0560FL	SS0580FL	SS05100FL	Unit
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	20	30	40	60	80	100	V
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	42	56	70	V
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	60	80	100	V
Maximum average forward rectified current    T <sub>J</sub> =90	I <sub>(AV)</sub>	0.5						A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I <sub>FSM</sub>	20						A
Maximum instantaneous    @I <sub>FM</sub> =0.5A forward voltage	V <sub>F</sub>	0.45	0.55		0.70	0.80		V
Repetitive peak reverse current at rated DC blocking voltage	I <sub>R</sub>	0.3						mA
Typical junction capacitance	C <sub>J</sub>	30						p F
Operating temperature range	T <sub>j</sub>	- 55 --- + 125						
Storage temperature range	T <sub>STG</sub>	- 55 --- + 150						


NOTE1. Measured at  $f=1.0MHz$ ,  $V_R=4.0V$

## RATINGS AND CHARACTERISTIC CURVES SS0520FL THRU SS05100FL


**FIG.1 – FORWARD DERATING CURVE**

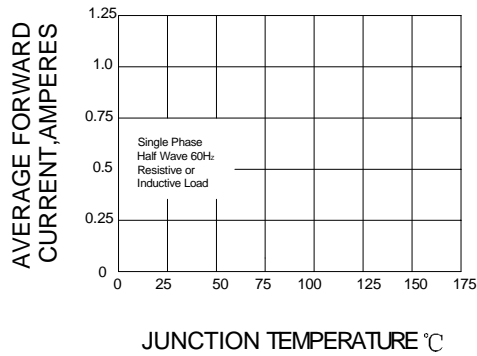


**FIG.2– PEAK FORWARD SURGE CURRENT**

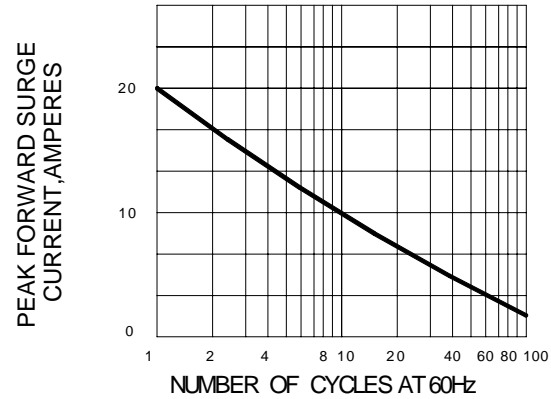

**FIG.3 – TYPICAL FORWARD CHARACTERISTICS**

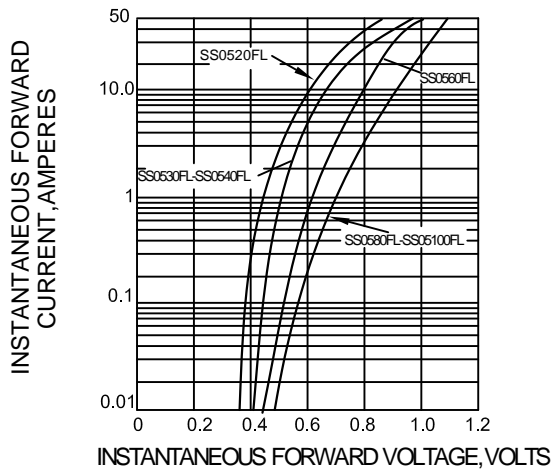

**FIG.4 – TYPICAL REVERSE CHARACTERISTICS**

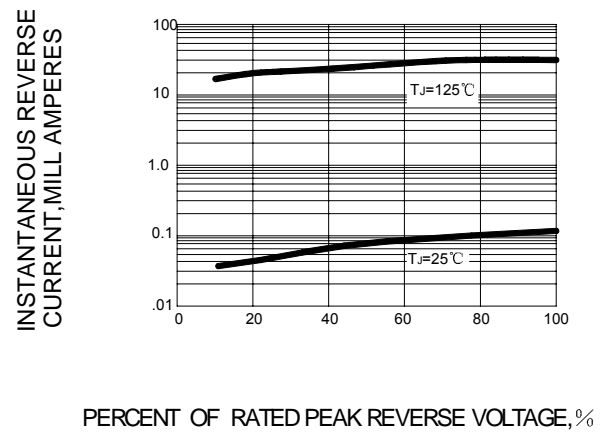

**FIG.5-TYPICAL JUNCTION CAPACITANCE**

