

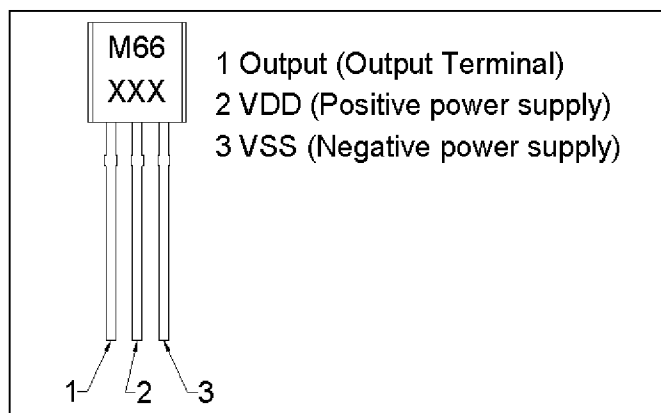
DESCRIPTION

The M66 series are low power CMOS LSI in TO-92 package, designed for the application of melody generation. The built in oscillator and strong driving capability minimise the external components required. A maximum of 128 notes can be programmed and repeat mode. It is suitable for use in melody cards, toys and other similar applications.

FEATURES

- Wide range of supply voltage (1.2 to 3.6V)
- Maximum of 128 notes
- Built - in RC oscillator
- Low power consumption
- Direct driving capability to piezo-buzzer

PIN ASSIGNMENT (TO-92)



ABSOLUTE MAXIMUM RATINGS

Supply Voltage	0 to 3.6V
Operating Temperature	0 to 70°C
Storage Temperature	-55 to +125°C



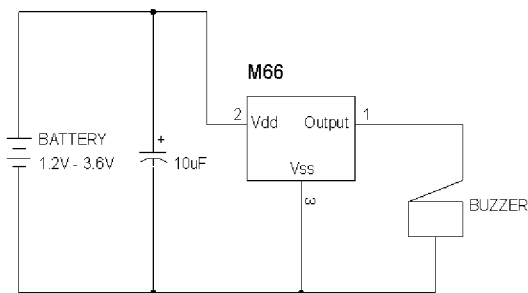
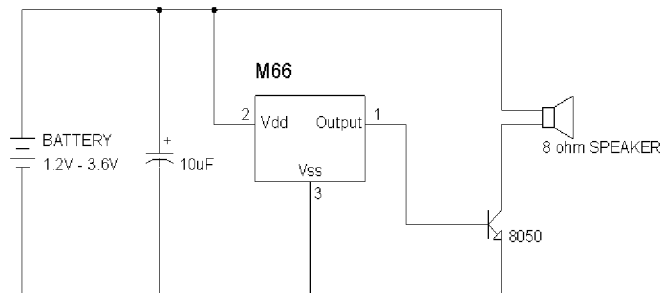
MICRO ELECTRONICS LTD.
38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.
Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343

REV A
page 1 of 2

ELECTRICAL CHARACTERISTICS

(Vdd=1.5V Vss=0V Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Operating Voltage	Vdd	1.2	1.5	3.6	V	
Operating Current	Idd		14	50	uA	Playing output open
Output Low Current	Iol	2		8	mA	Vol = 0.075V
Output High Current	Ioh	2		6	mA	Voh = 0.75V
Oscillating Frequency	Fosc	63	90	117	KHz	
Oscillating Start Voltage	Vstr	1.3			V	
Oscillating Hole Voltage	Vh		1.2		V	

TYPICAL APPLICATION CIRCUIT**A. LEVEL HOLD MODE FOR PIEZO****B. LEVEL HOLD MODE FOR SPEAKER****MICRO ELECTRONICS LTD.**

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

REV A

page 2 of 2