

TIP105/106/107



TIP105/106/107

Monolithic Construction With Built In Base-Emitter Shunt Resistors


- High DC Current Gain : $h_{FE}=1000$ @ $V_{CE} = -4V$, $I_C = -3A$ (Min.)
- Collector-Emitter Sustaining Voltage
- Low Collector-Emitter Saturation Voltage
- Industrial Use
- Complementary to TIP100/101/102

Absolute Maximum Ratings $T_a=25^\circ C$ unless otherwise noted

CHARACTERISTICS	SYMBOL	RATING	UNIT
Collector-Base Voltage : TIP105 : TIP106 : TIP107	V_{CBO}	-60 -80 -100	V V V
Collector-Emitter Voltage : TIP105 : TIP106 : TIP107	V_{CEO}	-60 -80 -100	V V V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current(DC)	I_C	-8	A
Collector Current(Pulse)	I_{CP}	-15	A
Base Current	I_B	-1	A
Collector Dissipation($T_a=25^\circ C$)	P_C	2	W
Collector Dissipation($T_c=25^\circ C$)	P_C	80	W
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature	T_{STG}	-65~150	$^\circ C$

PNP Epitaxial Silicon Darlington Transistor

Equivalent Circuit



TO-220
1. Base
2. Collector
3. Emitter



Electrical Characteristics $T_a=25^\circ C$ unless otherwise noted

CHARACTERISTICS	SYMBOL	Test Condition	Min	Max	Unit
Collector-Emitter Sustaining Voltage : TIP105 : TIP106 : TIP107	$V_{CEO(SUS)}$	$I_C=30mA$, $I_B=0$	-60 -80 -100		V V V
Collector Cut-off Current : TIP105 : TIP106 : TIP107	I_{CEO}	$V_{CE} = -30V, I_B=0$ $V_{CE} = -40V, I_B=0$ $V_{CE} = -50V, I_B=0$		-50 -50 -50	μA μA μA
Collector Cut-off Current : TIP105 : TIP106 : TIP107	I_{CBO}	$V_{CE} = -60V, I_E=0$ $V_{CE} = -80V, I_E=0$ $V_{CE} = -100V, I_E=0$		-50 -50 -50	μA μA μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = -5V, I_C=0$		-2	mA
DC Current Gain	h_{FE}	$V_{CE} = -4V, I_C = -3A$ $V_{CE} = -4V, I_C = -8A$	1000 200	20000	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -3A, I_B = -6mA$ $I_C = -8A, I_B = -80mA$		-2 -2.5	V V
Base-Emitter ON Voltage	$V_{BE(on)}$	$V_{CE} = -4V, I_C = -8A$		-2.8	V
Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E=0$, $f=0.1MHz$		300	pF

* Pulse Test: $PW \leq 300\mu s$, Duty Cycle $\leq 2\%$

Typical Characteristics

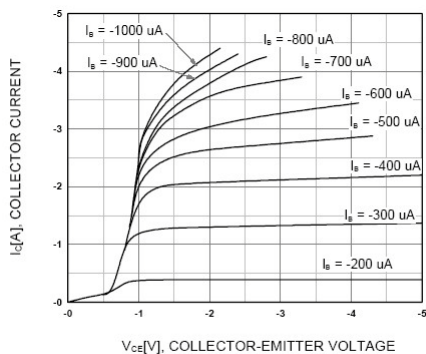


Figure 1. Static Characteristic

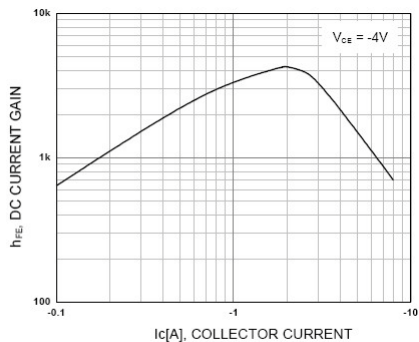


Figure 2. DC current Gain

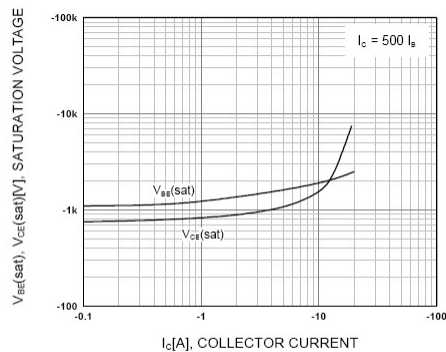


Figure 3. Collector-Emitter Saturation Voltage
Base-Emitter Saturation Voltage

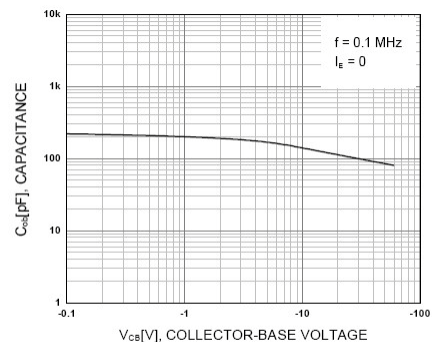


Figure 4. Collector Output Capacitance

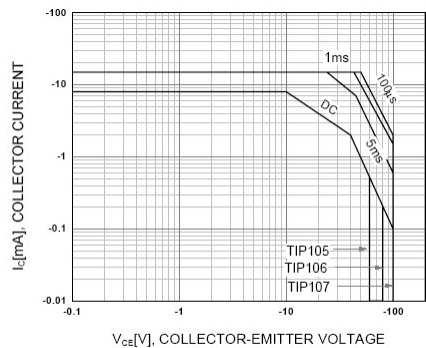


Figure 5. Safe Operating Area


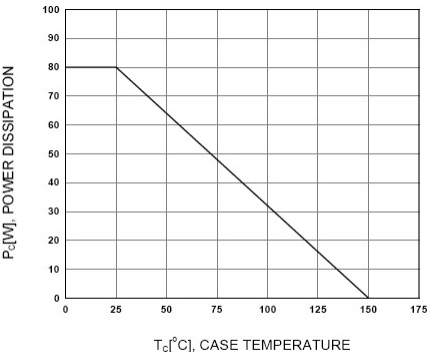


Figure 6. Power Derating

Package Dimension


TO-220 (A)

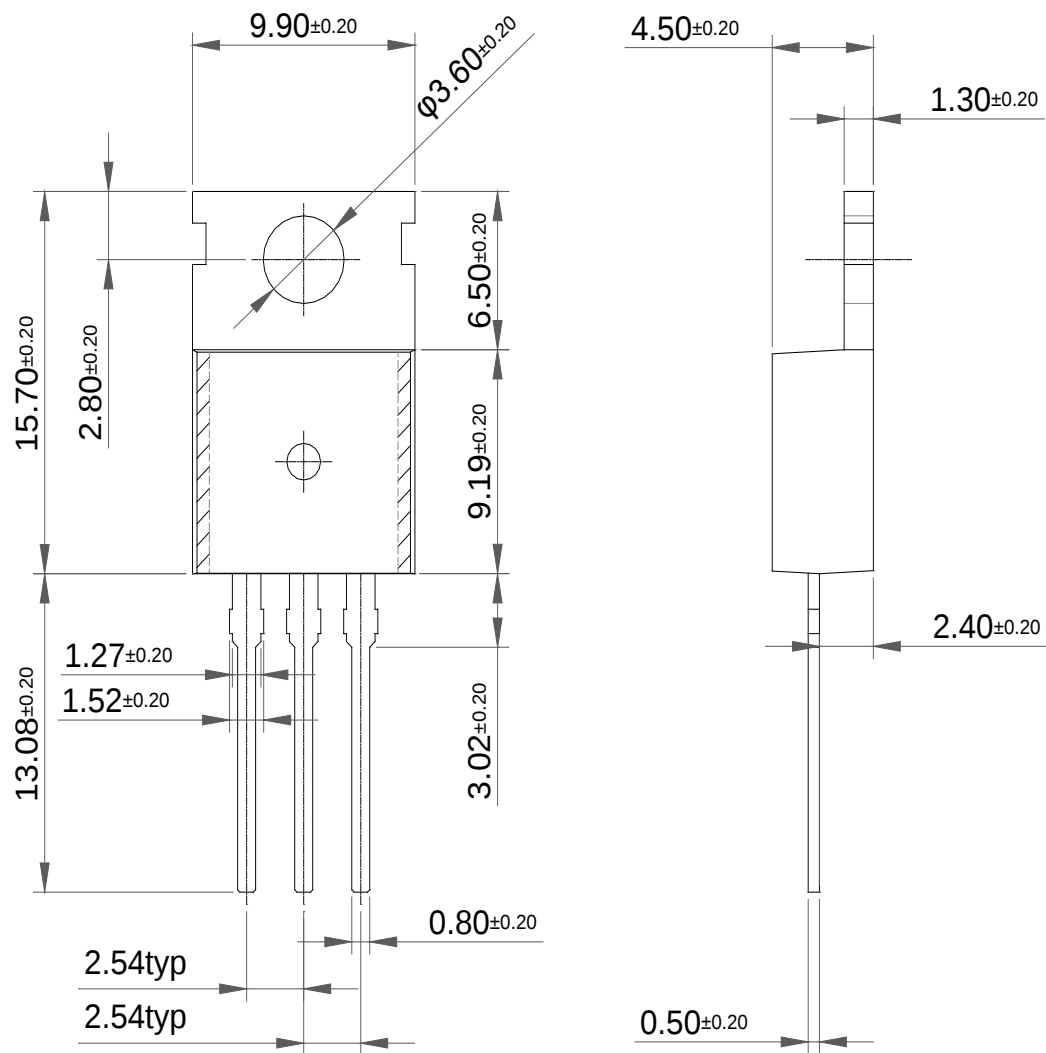

Dimensions in Millimeters

Package Dimension

TO-220 (B)

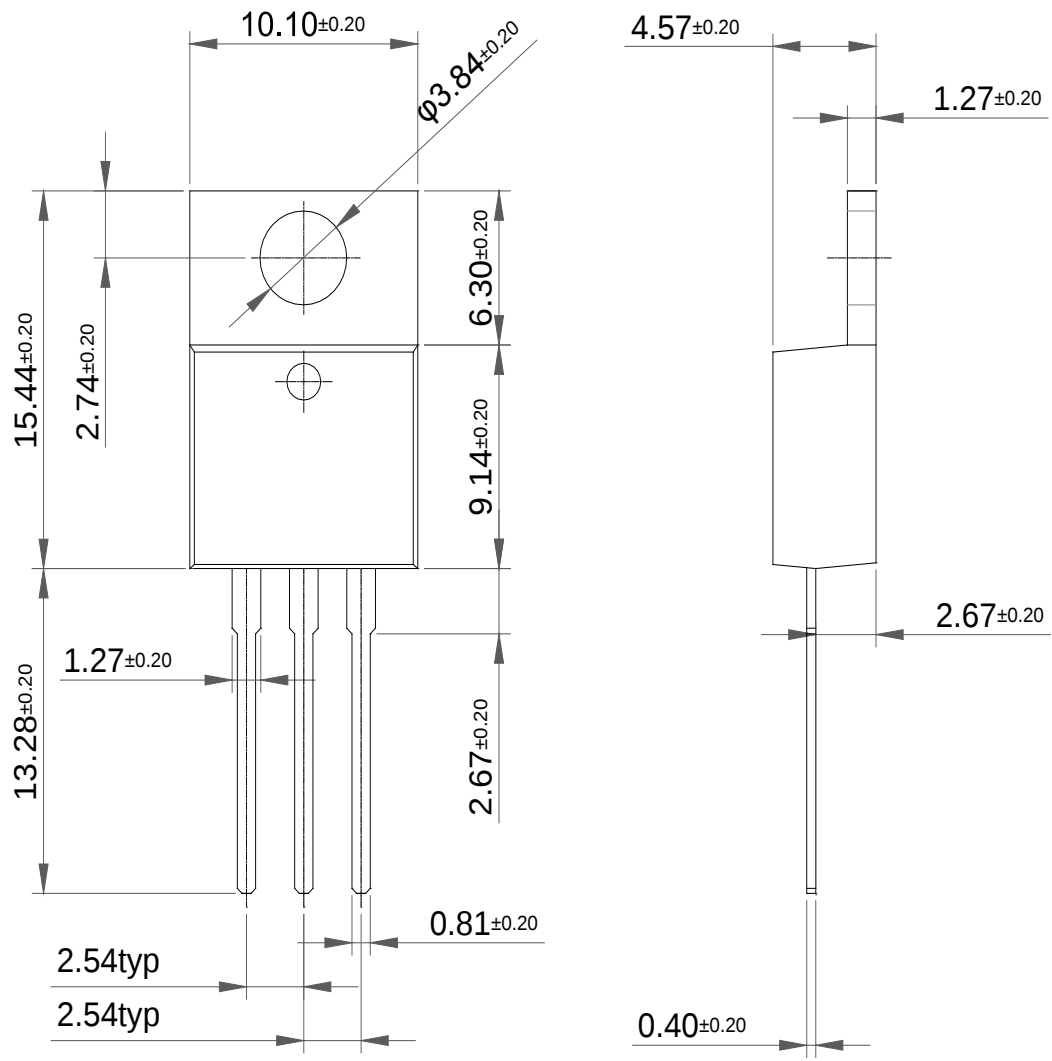

Dimensions in Millimeters