

Customer Information Sheet

DRAWING No.: M80-889XXX

SHEET 2 OF 2 IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

2.00 x No. OF WAYS PER ROW + 3.15 MAX

2.00 x No. OF PITCHES PER ROW

COMMERCIAL
ORDER CODE:**M80-889XXX**

TOTAL No. OF WAYS

04, 06, 08, 10, 12, 14, 16,
18, 20, 26, 34

FINISH

01 - GOLD CLIP, TIN SHELL
05 - GOLD CLIP, GOLD SHELL
T6 - TIN CLIP, TIN SHELL

BRITISH STANDARD


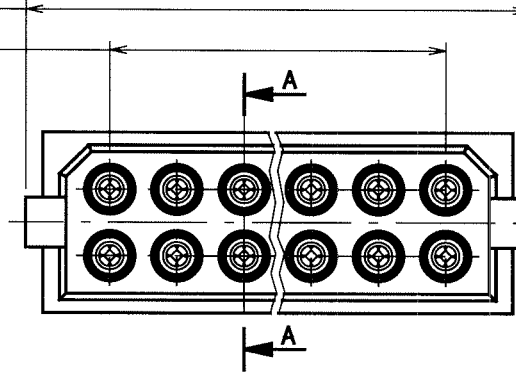
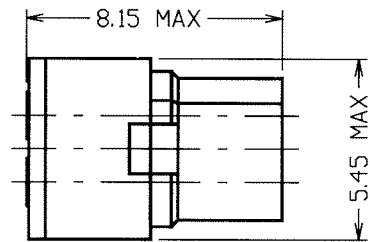
ORDER CODE: TO BS9525 F0033

B5740-2XX-F-D-X

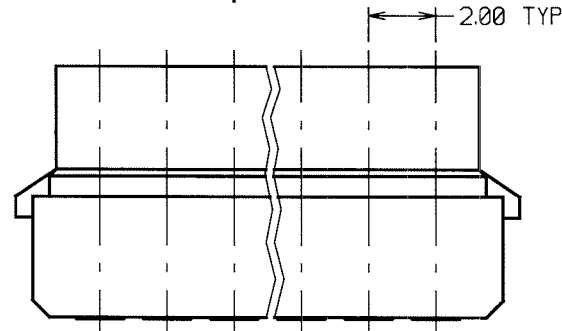
TOTAL No. OF WAYS

04, 06, 08, 10, 12, 14, 16,
18, 20, 26, 34

FINISH

0 - GOLD CLIP, TIN SHELL
2 - GOLD CLIP, GOLD SHELL

SECTION A-A



SPECIFICATIONS:

MATERIAL:

MOULDING - GLASS-FILLED
POLYESTER UL94V-0

CLIP - BERYLLIUM COPPER

SHELL - BRASS

FINISH:

CONTACTS:

01 - 0.30mm GOLD CLIP, 4.0mm TIN SHELL
05 - 0.30mm GOLD CLIP, 0.28mm GOLD SHELL
T6 - 1.3mm 90/10 TIN/LEAD CLIP,
4.0mm TIN SHELL

MECHANICAL:

DURABILITY - 500 OPERATIONS
INSERTION FORCE - 2.8N MAX, 1.0N MIN
WITHDRAWAL FORCE - 1.8N MAX, 0.2N MIN

PACKING:

BAG (CONTACTS AND MOULDINGS UN-ASSEMBLED)

FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C005XX (LATEST ISSUE)

ELECTRICAL:

CURRENT RATING AT 25°C - 3.0A MAX
CURRENT RATING AT 85°C - 2.2A MAX

WORKING VOLTAGE - 120V AC/DC

VOLTAGE PROOF - 360V AC/DC

CONTACT RESISTANCE (INITIAL) -
20 MILLIOHMS MAXCONTACT RESISTANCE (AFTER
CONDITIONING) - 25 MILLIOHMS MAXINSULATION RESISTANCE (INITIAL) -
1000 MEGOHMS MININSULATION RESISTANCE (AFTER
CONDITIONING) - 100 MEGOHMS MIN

ENVIRONMENTAL:

TEMPERATURE RANGE - -55°C TO +125°C

NOTES:

1. RECOMMENDED WIRE TYPE = BS3G210 TYPE A, PTFE INSULATED, 22 AWG. MAX INSULATION DIAMETER = 0.110mm, STRIP WIRE BY 2.00mm.
2. RECOMMENDED HAND CRIMP TOOL = M22520/2-01 WITH POSITIONER T5747. ALSO AVAILABLE: PNEUMATIC AND ELECTRICAL CRIMP MACHINES.
3. CONTACT INSERTION & EXTRACTION TOOL = Z80-280
4. REFER TO INSTRUCTION SHEET FOR HAND CRIMP TOOL M22520/2-01 FOR COMPLETE CRIMPING INSTRUCTIONS.

JMB	9	11.07.05	8619
NAME	ISS.	DATE	C/NOTE
APPROVED:			
CHECKED:			
DRAWN:		W. J. BOURNE	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWINHARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.comHARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.ukHARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sgTHIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES

X. - ±1mm
X.X - ±0.25mm
X.XX - ±0.10mm
X.XXX - ±0.01mm
ANGLES - ±5°
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE: DATAMATE 2mm PITCH
CRIMP DIL SOCKET ASSEMBLY
LARGE BORE (22 AWG)

DRAWING NUMBER:

M80-889XXXSHT
2
OF
2