


PARAMETER		UNITS
Turns Ratio	1 : 1	
Impedance @1 KHz -1 Vrms pin 5-8 600 pin 1-4 600	$\pm 15\%$	Ω Ω
Primary DC Resistance (1-4)	55 $\pm 10\%$	Ω
Secondary DC Resistance (5-8)	43 $\pm 10\%$	Ω
Inductance (1-4) @1KHz, 0.1 Vrms	320 Min	mH
¹ Insertion Loss @ 1KHz - 1Vrms	1 Max	dB
Return loss pins 5-8 With 600 Ω load @ 300 Hz @ 1 KHz @ 3400 Hz	10 Min 15 Min 18 Min	dB dB dB
Isolation (HI-POT) 1-5 (@ 1500 VAC, 1mA, minute)	1500	VAC

¹Pins 5-8 with 600 Ω load

Physical Dimensions in inches (mm)

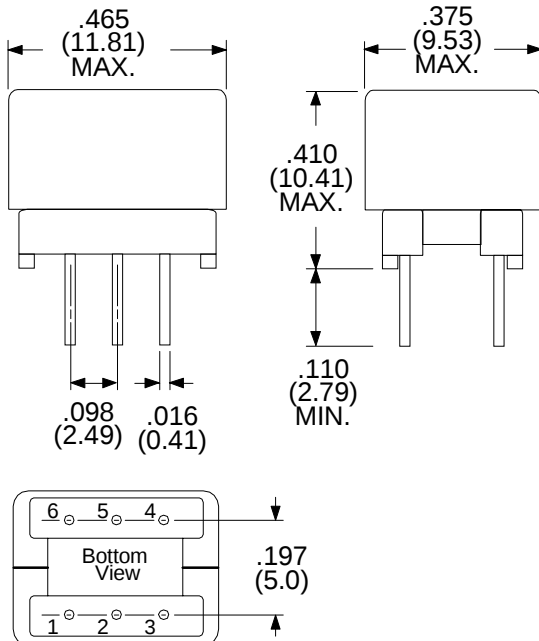


Notch or white dot on bobbin indicates pin #1

AUDIO Transformer


600 Ω

Part Number T-1487

Schematic Diagram

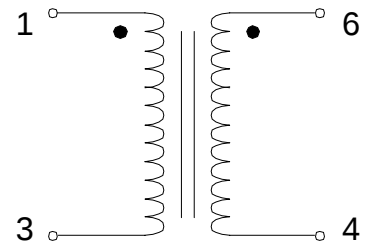


FREQUENCY RESPONSE

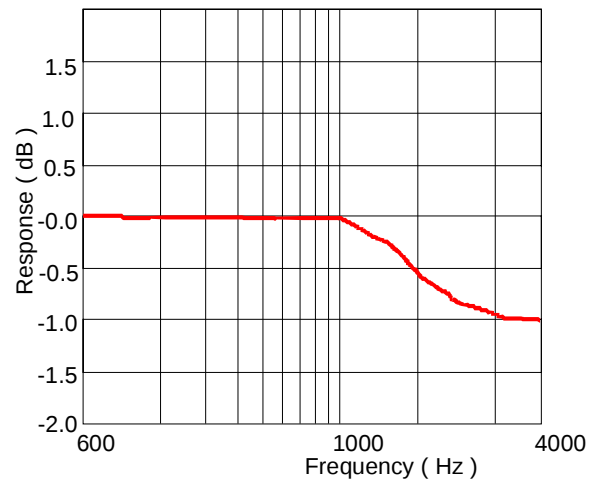

PIN POSITION GRID 0.098 (2.5)

● BOBBIN TERMINATIONS

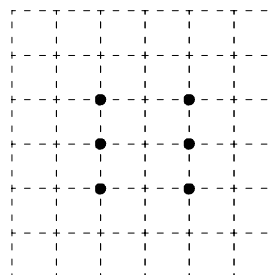

11/2/00