

KTE3000 / KTU3000 Series

OEM pressure transmitters for industrial media

FEATURES

- 0...-1 to 0...50 bar,
0...-15 to 0...750 psi
gage¹ or absolute
- For many industrial gases and liquids
- 0...10 V, 0.5...4.5 V, 0...5 V, 1...6 V or
4...20 mA output
- Field interchangeable
- For industrial use

MEDIA COMPATIBILITY

Wetted materials:
PPS, ceramic Al₂O₃ and NBR⁸

Housing:
stainless steel 1.4404 (316L), protection class IP 65
(according to DIN EN 60529) respectively NEMA 4X¹




SPECIFICATIONS^{10,11}

Maximum ratings


Supply voltage (reverse polarity protection)	
KTx3...0	13...32 V
KTx3...6	9...32 V
KTx3...1, ...7	8...32 V
KTx3...4 ²	7...32 V
Maximum load current	
Source/Sink	1 mA
Temperature limits	
Storage	-40...100°C
Operating	-25...85°C
Compensated	0...70°C
Humidity limits	0 - 95 %RH
Vibration (5 to 500 Hz)	10 g _{RMS}
Mechanical shock	50 g
Proof pressure ³	2 x rated pressure

ELECTRICAL CONNECTION

0...10 V, 0.5...4.5 V, 0...5 V, 1...6 V output

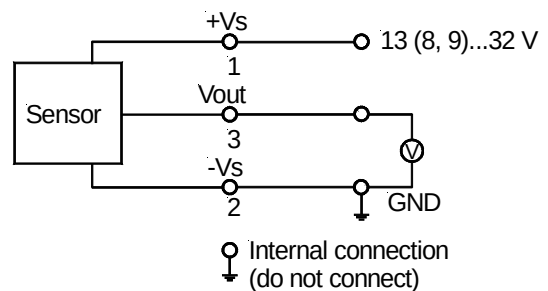

4... 20 mA output

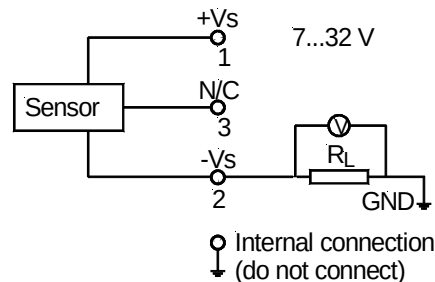

KTE3000 / KTU3000 Series

OEM pressure transmitters for industrial media

COMMON PERFORMANCE CHARACTERISTICS

($V_S = 15\text{ V}$, $R_L > 100\text{ k}\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Operating pressure	KTE3001...	0		1	bar
	KTE3N01G..	-1		1	
	KTE3P01G..	-1		0	
	KTE3002...	0		2	
	KTE3005...	0		5	
	KTE3010...	0		10	
	KTE3016...	0		16	
	KTE3020...	0		20	
	KTE3025...	0		25	
	KTE3035...	0		35	
	KTE3050...	0		50	
	KTU3015...	0		15	psi
	KTU3N15G..	-15		15	
	KTU3P15G..	-15		0	
	KTU3030...	0		30	
	KTU3050...	0		50	
	KTU3100...	0		100	
	KTU3200...	0		200	
	KTU3300...	0		300	
	KTU3500...	0		500	
	KTU3750...	0		750	
Thermal effects (0...70°C) ⁴	Offset		0.02	0.05	%FSO/°C
	Span		0.02	0.05	
Thermal effects (-25...0°C, 70...85°C)	Offset		0.03		%FSO/°C
	Span		0.03		
Non-linearity, hysteresis (BSL) and repeatability ⁵			±0.1	±0.3	%FSO
Long term stability ⁶			±0.3		
Output noise (0 < f < 1 kHz)			±0.04		
Response time (10 to 90 %)			1	5	ms
Power supply rejection			0.005		%FSO/V

Specification notes:

1. IP 65 protection is given when the connector is locked with a rubber washer. For proper function the gage port is vented to the atmosphere through the connector/cable assembly. Thus the cable end must have access to the ambient pressure.
2. The minimum supply voltage is directly proportional to the load resistance seen by the transmitter. For more details see the load limitation diagram.
3. Proof pressure is the maximum pressure which may be applied without causing damage to the sensing element.
4. Thermal effects tested and guaranteed from 0 to 70°C relative to 25°C. All specifications shown are relative to 25°C.
5. Non-linearity refers to the **Best Straight Line** fit measured for offset, full scale span and 1/2 full scale span.
6. Long term stability is the change in output after one year or 1 million pressure cycles.
7. Span is the arithmetic difference in transmitter output signal measured at zero pressure and the maximum operating pressure.
8. Other sealing materials are available on request.
9. Test are in accordance with EN61000-6-2, April 1999.
10. CE-labelling is in accordance with 89/336/EEC.
11. The pressure transmitters must not be used as safety accessories according to article 1, 2.1.3 of the directive 97/23/EC.

KTE3000 / KTU3000 Series

OEM pressure transmitters for industrial media

INDIVIDUAL PERFORMANCE CHARACTERISTICS

0...10 V output ($V_s = 15 \text{ V}$, $R_L > 100 \text{ k}\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	KT...3N...	4.9	5	5.1	V
	all others		0.03	0.1	
Full scale span ⁷	KT...3N...	4.9	5	5.1	
	all others	9.9	10	10.1	
Output impedance				25	Ω
Current consumption (no load)			3	5	mA

0.5...4.5 V output ($V_s = 15 \text{ V}$, $R_L > 100 \text{ k}\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	KT...3N...	2.45	2.5	2.55	V
	all others	0.45	0.5	0.55	
Full scale span ⁷	KT...3N...	1.95	2	2.05	
	all others	3.95	4	4.05	
Output impedance				25	Ω
Current consumption (no load)			3	5	mA

0...5 V output ($V_s = 15 \text{ V}$, $R_L > 100 \text{ k}\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	KT...3N...	2.45	2.5	2.55	V
	all others		0.03	0.08	
Full scale span ⁷	KT...3N...	2.45	2.5	2.55	
	all others	4.95	5.0	5.05	
Output impedance				25	Ω
Current consumption (no load)			3	5	mA

1...6 V output ($V_s = 15 \text{ V}$, $R_L > 100 \text{ k}\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	KT...3N...	3.45	3.5	3.55	V
	all others	0.95	1	1.05	
Full scale span ⁷	KT...3N...	2.45	2.5	2.55	
	all others	4.95	5.0	5.05	
Output impedance				25	Ω
Current consumption (no load)			3	5	mA

4...20 mA output ($V_s = 15 \text{ V}$, $R_L = 100 \Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)


Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	KT...3N...	11.9	12.0	12.1	mA
	all others	3.9	4.0	4.1	
Full scale span ⁷	KT...3N...	7.9	8.0	8.1	
	all others	15.9	16.0	16.1	
Power consumption ($I_L = 20 \text{ mA}$)			250		mW

KTE3000 / KTU3000 Series


OEM pressure transmitters for industrial media

OUTPUT CHARACTERISTICS


0...10 V output version

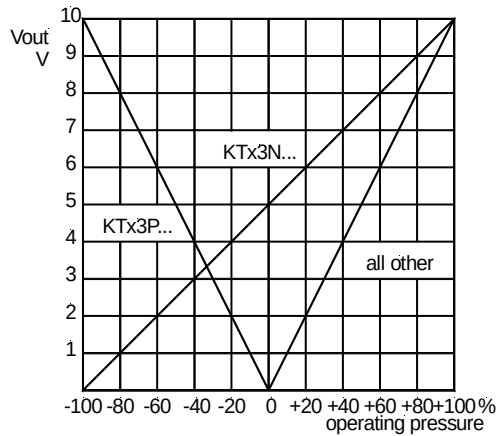


0.5...4.5 V output version

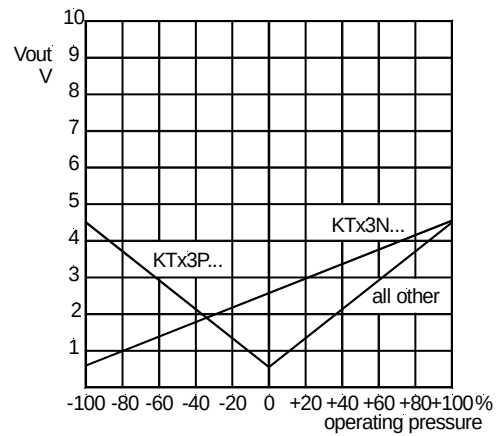


0...5 V output version

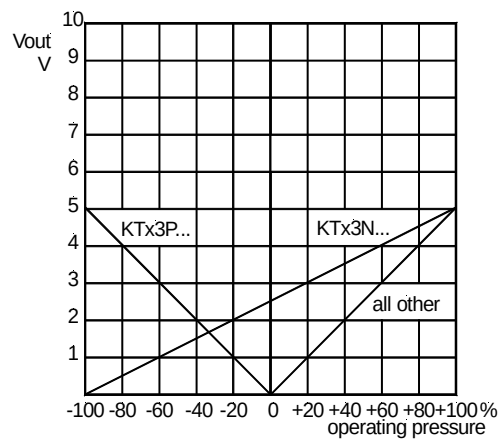

1...6 V output version

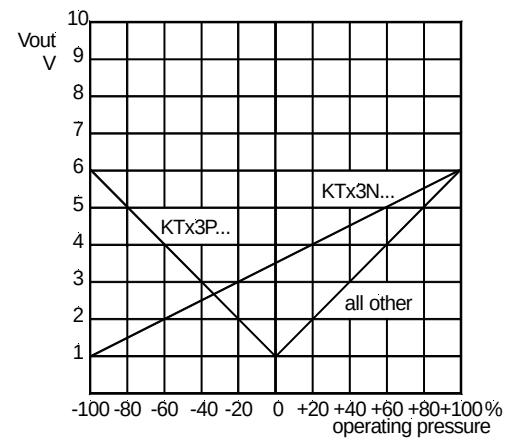


4...20 mA output version

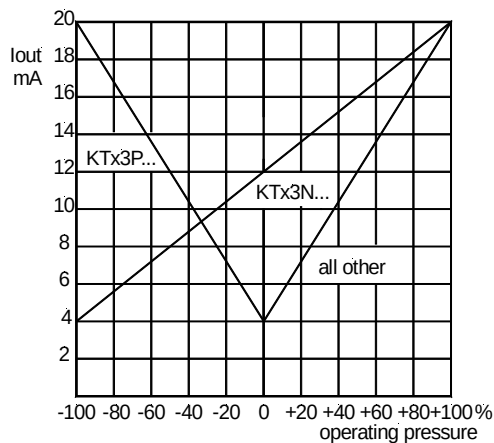

KTE3000 / KTU3000 Series

OEM pressure transmitters for industrial media

OUTLINE DRAWING

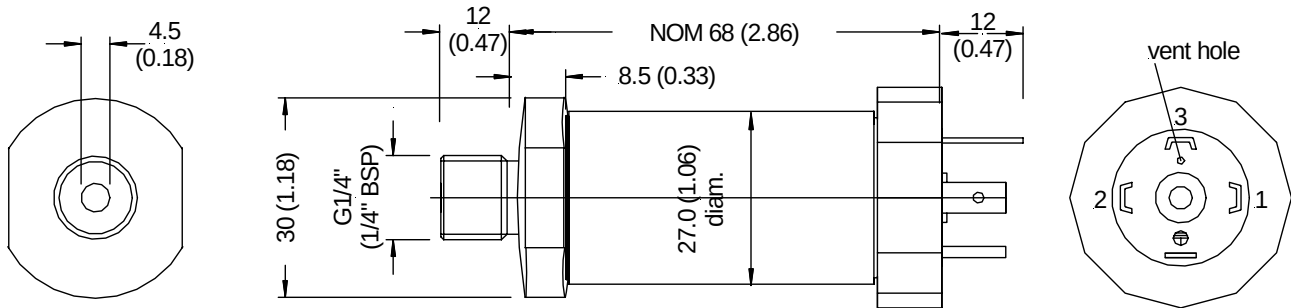


mass: 210 g

dimensions in mm (inches)


LOAD LIMITATION

4...20 mA output version

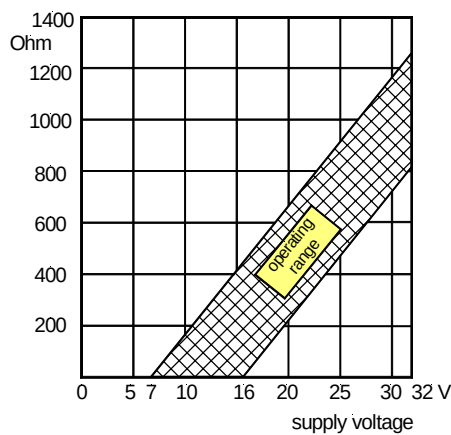

RECOMMENDED ACCESSORY

Plug **DIN EN 175301-803 A** and profile washer included in delivery. For a complete connector/cable assembly use order no. **ZK000110-x** (x=cable lengths in m).

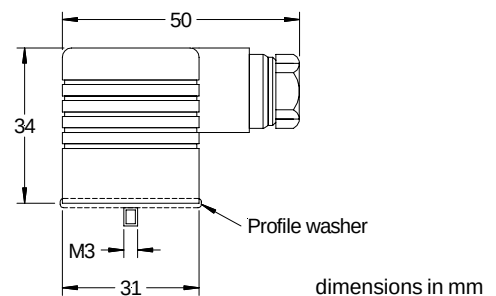

Note:

For proper function of all gage devices the gage port must be vented to the atmosphere through the connector/cable assembly.

KTE3000 / KTU3000 Series

OEM pressure transmitters for industrial media

ELECTROMAGNETIC CAPABILITY⁹

	Test conditions	Criterion	Interference
Radiated, radio frequency electromagnetic field immunity (RFI)	EN61000-4-3: Grade 3, 10 V/m, 80 to 1000 MHz 80 % AMC (1 kHz)	A	<1 %FSO
Electrical fast transient / burst immunity (EFT)	EN61000-4-4: Grade 3, ±2 kV	B	<1 %FSO
Electrostatic discharge immunity test (ESD)	EN61000-4-2: Grade 4, ±8 kV, contact discharge	B	<1 %FSO
Immunity to conducted disturbances induced by radio-frequency fields	EN61000-4-6: Grade 3, 0.15 to 80 MHz 10 V, 80 % AMC (1 kHz)	A	<1 %FSO

ORDERING INFORMATION

		KTx3	xxx	x	x	x	
E: bar calibration							Output signal 0: 0...10 V 1: 1...6 V 4: 4...20 mA 6: 0.5...4.5 V 7: 0...5 V
U: psi calibration							
KTE3000 series	KTU3000 series						Fitting size Q: G 1/4" (1/4" BSP) male <i>Other fittings on special request</i>
001: 0 to 1 bar	015: 0 to 15 psi						
N01: -1 to +1 bar	N15: -15 to +15 psi						Pressure mode G: gage pressure ¹ A: absolute pressure
P01: -1 to 0 bar	P15: -15 to 0 psi						
002: 0 to 2 bar	030: 0 to 30 psi						
005: 0 to 5 bar	050: 0 to 50 psi						
010: 0 to 10 bar	100: 0 to 100 psi						
016: 0 to 16 bar	200: 0 to 200 psi						
020: 0 to 20 bar	300: 0 to 300 psi						
025: 0 to 25 bar	500: 0 to 500 psi						
035: 0 to 35 bar	750: 0 to 750 psi						
050: 0 to 50 bar							

Note: Other pressure ranges and options are widely available.
Please contact your nearest Sensorteknics sales representative.

Sensorteknics reserves the right to make changes to any products herein. Sensorteknics does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

December 2008 / 626

6/6

SENSORTECHNICS

www.sensorteknics.com