

Double-Balanced Mixer

Rev. V3

Features

- LO 10 TO 1600 MHz
- RF 10 TO 1500 MHz
- IF 0 TO 600 MHz
- LO DRIVE: +20 dBm (NOMINAL)
- HIGH INTERCEPT POINT: +30 dBm TYP. (UPCONV.)
+24 dBm TYP. (DOWNCONV.)

Description

The M9H is a double balanced mixer, designed for use in military, commercial, and test equipment applications. The design utilizes Schottky ring quad diodes and broadband ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. Environmental screening is available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Product Image



Ordering Information


Part Number	Package
M9H	TO-8
M9HC	SMA Connectorized

Electrical Specifications: $Z_0 = 50\Omega$ $L_o = +20$ dBm (Downconverter Application only)


Parameter	Test Conditions	Units	Typical	Guaranteed	
			25°C	0° to 50°C	-54° to +85°C
SSB Conversion Loss & SSB Noise Figure (max)	fR=0.02 to 0.4 GHz, fL=0.01 to 0.6 GHz, fI=0.002 to 0.2GHz fR=0.01 to 1.5 GHz, fL=0.01 to 1.6 GHz, fI=0.001 to 0.6GHz fI=0.002 to 0.2 GHz fI=0.001 to 0.6 GHz	dB	7.0	8.0	8.3
		dB	8.0	9.0	9.3
		dB	8.5	9.0	9.3
		dB	9.0	9.5	9.8
Isolation, L to R (min)	fL = 0.01 to 0.4 GHz fL = 0.4 to 1 GHz fL = 1 to 1.5 GHz	dB	35	28	27
		dB	30	23	22
		dB	22	20	19
Isolation, L to I (min)	fL = 0.01 to 0.4 GHz fL = 0.4 to 1 GHz fL = 1 to 1.5 GHz	dB	40	28	27
		dB	22	16	15
		dB	18	13	12
Isolation, R to I (min)	fL = 0.01 to 1 GHz fL = 1 to 1.5 GHz	dB	20		
		dB	10		
1 dB Conversion Compression	fL @ +20 dBm	dBm	+15		
Input IP3		dBm	+30		
		dBm	+24		

Typical Performance Curves



Conversion Loss vs. LO Drive

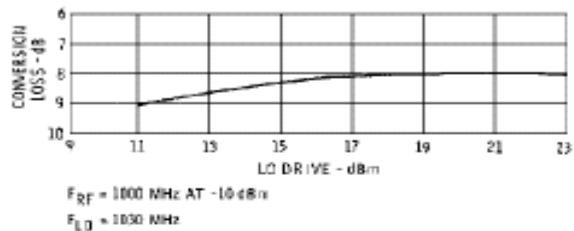



Upconversion Loss vs. Frequency

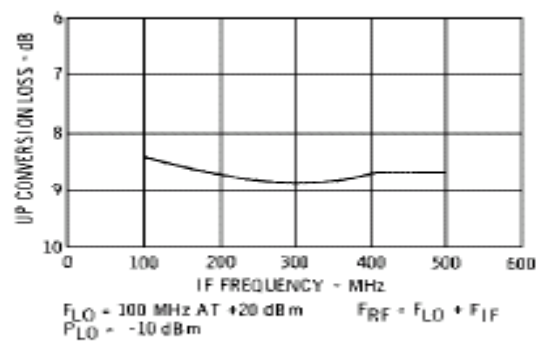


Conversion Loss vs. Frequency

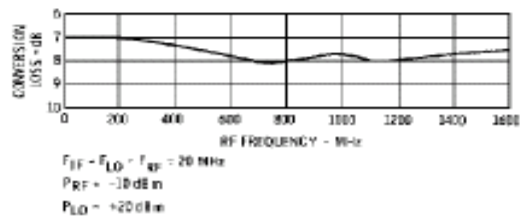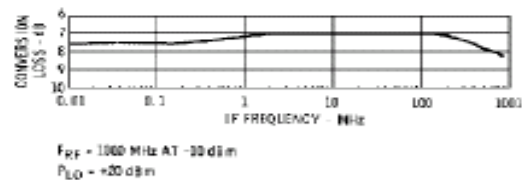

Isolation vs. Frequency

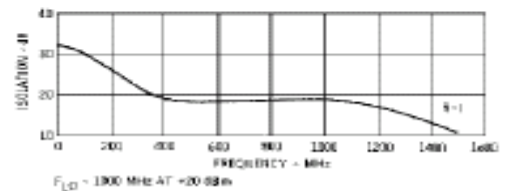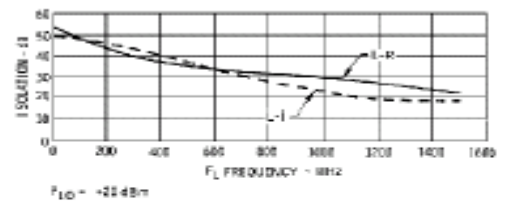

VSWR

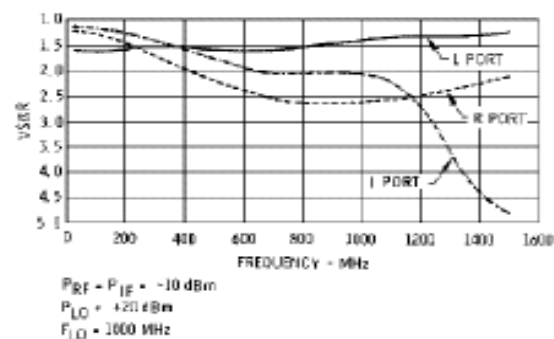


Double-Balanced Mixer

Rev. V3

Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-54 C to +100°C
Storage Temperature	-65°C to +100°C
Peak Input Power	+23 dBm max @ +25°C dBm max @ +100°C
Peak Input Current	100 mA DC

Outline Drawing: TO-8

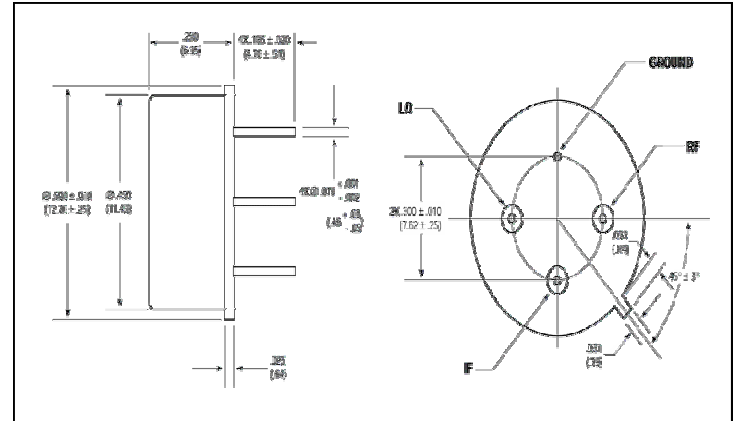

Outline Drawing: SMA Connectorized

