


GF063-K Series with Knob

TOCOS[®]
POTENTIOMETERS

1/4" Square, Single-Turn, Through-Hole Sealed Cermet Trimmers

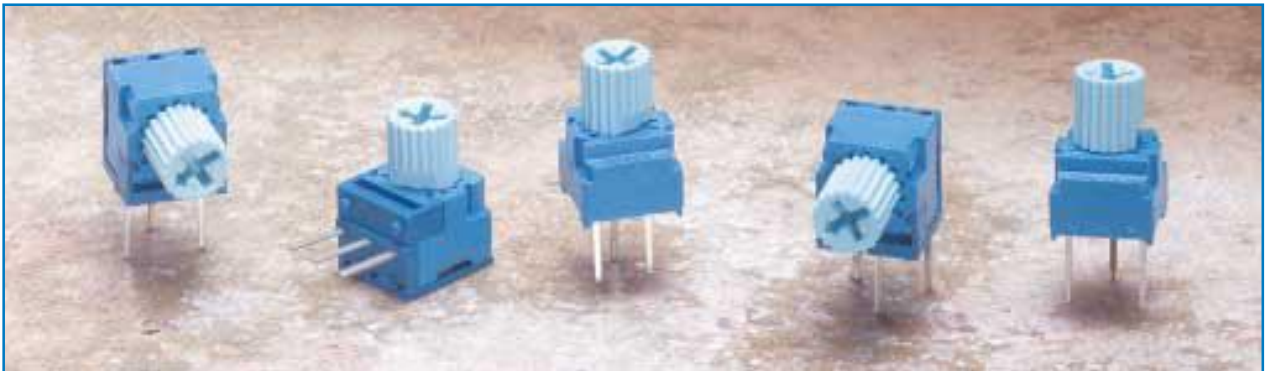

Features

- 1/4" square, single-turn, through-hole, sealed cermet trimmers
- Top and side adjust styles available
- Knob on all models for convenient fingertip adjustment
- Same design and housing sizes as GF063 series
- Precious metal, multi-contact wiper design
- Meets UL 94V-0 flammability requirements
- Sealed to withstand immersion cleaning processes
- Tape and ammo box available for PK, P1K and UK models

Specifications

Electrical

Standard Resistance Range 10 Ω to 5M Ω
(standard 1, 2 & 5 sequence)
Resistance Tolerance $\pm 10\%$ and $\pm 20\%$
End Resistance 1% or 1 Ω , whichever is greater
Resistance Taper Linear
Peak Noise (C.R.V.) 1% or 1 Ω , whichever is greater
Power Rating 0.5 watt at +70°C, 0 watt at +125°C
Maximum Input Voltage 250VDC or power rating,
whichever is smaller
Temperature Coefficient ± 100 ppm/°C
Insulation Resistance 1,000M Ω minimum at 500VDC
Dielectric Strength 900VAC, 1 minute
Adjustment Travel 210° $\pm$ 10°

Mechanical

Mechanical Travel 250° $\pm$ 10°
Shaft Torque 200 gf•cm (2.77 oz•in) max.
Stop Strength 500 gf•cm (6.93 oz•in) min.
Flammability of Plastic Materials Meets UL 94V-0
Nominal Weight 0.54g (PK, P1K, WK, UK)
0.64g (SK, S1K, XK, X1K, VK, V1K)
Marking Resistance code, date code, model type

Environmental









Temperature Range -55°C to +125°C
Low Temperature Operation -55°C, 0.5 watt, 2 hours
 $\Delta T/R \leq \pm 2\%$, S.S. $\leq \pm 2\%$
High Temperature Exposure +125°C, 250 hours
 $\Delta T/R \leq \pm 2\%$, S.S. $\leq \pm 2\%$
Load Life +70°C, 0.5 watt, 1,000 hours
 $\Delta T/R \leq \pm 3\%$, S.S. $\leq \pm 2\%$
Thermal Shock -55°C, +125°C,
30 minutes each, 5 cycles
 $\Delta T/R \leq \pm 1\%$, S.S. $\leq \pm 1\%$
Shock 100G, 6ms, 6 directions, 3 times each
 $\Delta T/R \leq \pm 1\%$, S.S. $\leq \pm 1\%$
Vibration 10-2,000Hz, 1.5mm amplitude,
20G, 12 hours
 $\Delta T/R \leq \pm 1\%$, S.S. $\leq \pm 1\%$
Humidity +40°C, 90-95% RH,
0.5 watt, 500 hours
 $\Delta T/R \leq \pm 3\%$, S.S. $\leq \pm 2\%$
Moisture Resistance -10°C to +65°C, 80-98% RH,
0.5 watt, 10 cycles, 240 hours
 $\Delta T/R \leq \pm 2\%$
Soldering Heat Resistance 350°C, 3 seconds
 $\Delta T/R \leq \pm 1\%$
Seal Test +85°C, hot water for 1 minute
Rotational Life 100 cycles without discontinuity
 $\Delta T/R \leq \pm (2\Omega + 3\%)$

$\Delta T/R$ = Total Resistance Change; S.S. = Setting Stability (voltage ratio)

All GF063-K models are available without knobs.
Refer to GF063 Series on page 56.

GF063-K Series**Dimensions**

Unit: mm

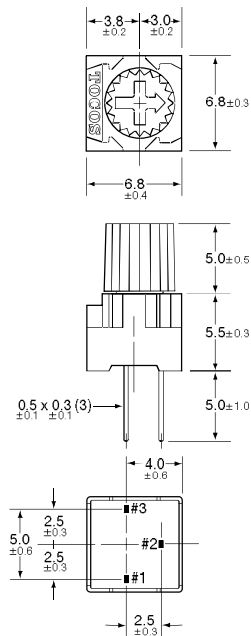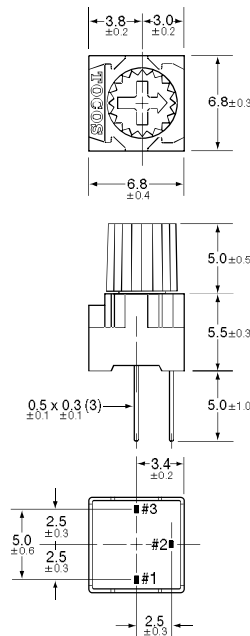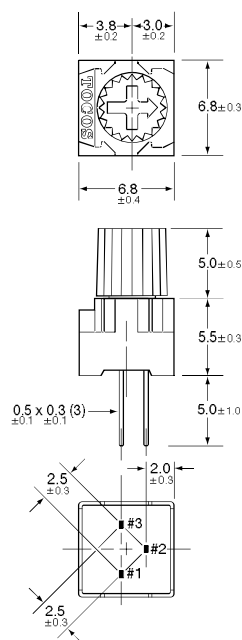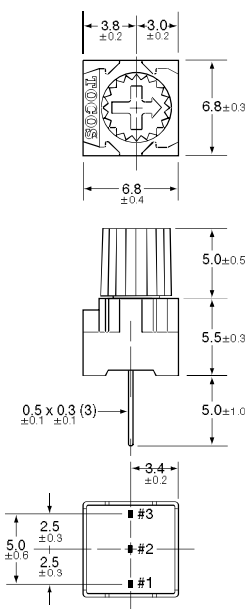GF063PK
P Terminal Style, Top Adjust Knob**Recommended
PCB Layout****GF063P1K**
P1 Terminal Style, Top Adjust Knob**Recommended
PCB Layout****GF063WK**
W Terminal Style, Top Adjust Knob**Recommended
PCB Layout****GF063UK**
U Terminal Style, Top Adjust Knob**Recommended
PCB Layout****TOCOSAMERICA, INC.**

1177 East Tower Road, Schaumburg, IL 60173 Tel: 847-884-6664 Fax: 847-884-6665 E-mail: sales@tocos.com www.tocos.com


GF063-K Series

Dimensions

Unit: mm


GF063SK

S Terminal Style, Side Adjust Knob

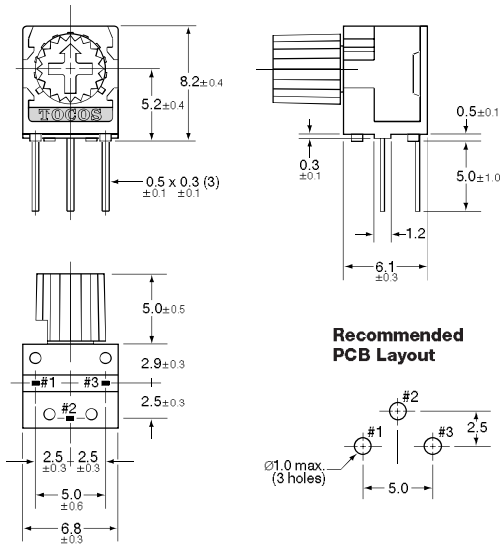


GF063S1K

S1 Terminal Style, Side Adjust Knob

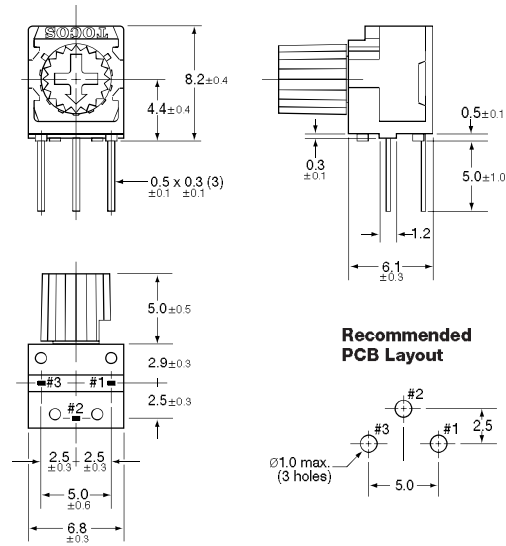


GF063XK

X Terminal Style, Side Adjust Knob

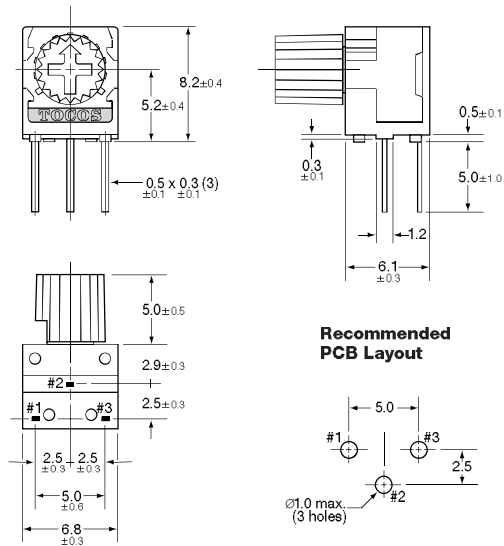

GF063X1K

X1 Terminal Style, Side Adjust Knob

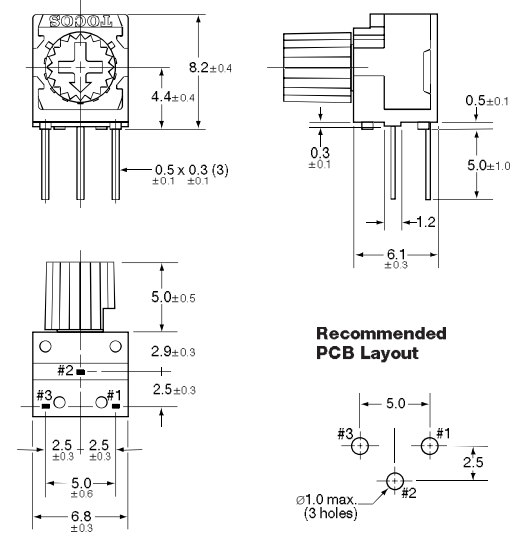

GF063-K Series

Dimensions



GF063VK

V Terminal Style, Side Adjust Knob

GF063V1K

V1 Terminal Style, Side Adjust Knob


Unit: mm

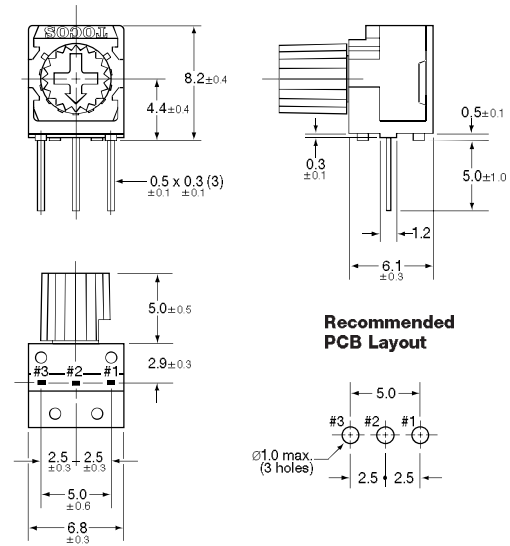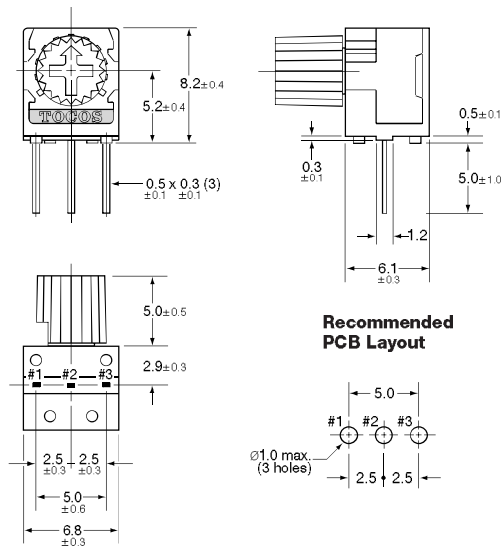


Knob Dimensions

All GF063-K Models

Unit: mm

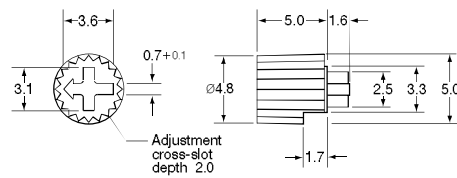

Electrical Schematic

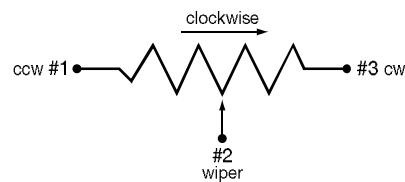

TOCOSAMERICA, INC.

1177 East Tower Road, Schaumburg, IL 60173 Tel: 847-884-6664 Fax: 847-884-6665 E-mail: sales@tocos.com www.tocos.com

GF063-K Series


Tape & Ammo Box Specifications

Unit: mm


Tape Dimensions

Conforms to EIA-468 Specifications

PKT2, P1KT2

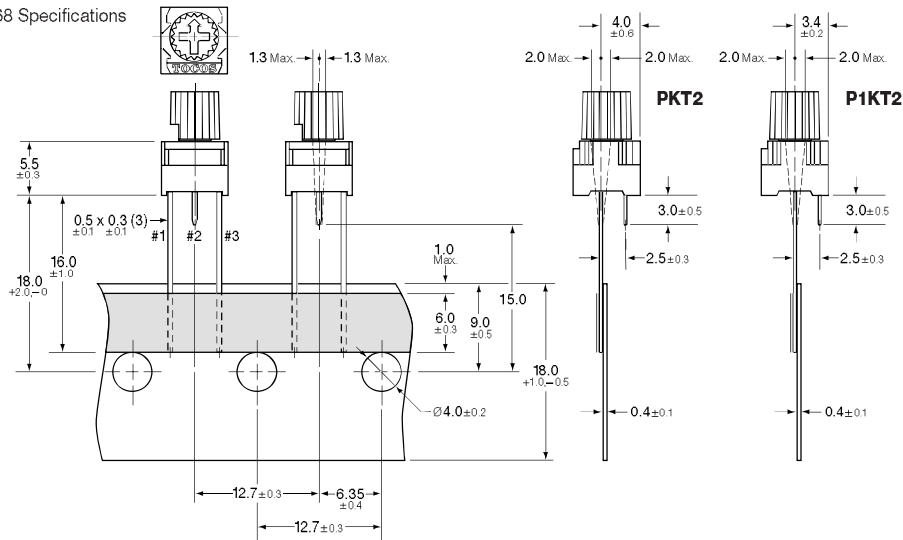


UKT2

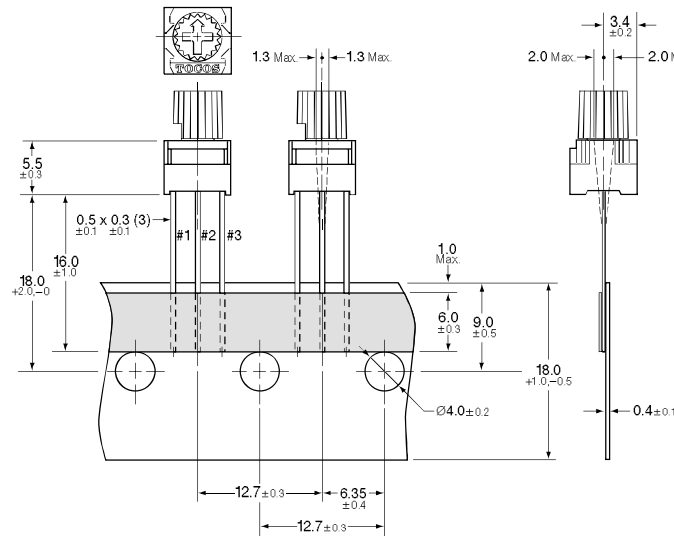

Ammo Box Dimensions

Conforms to EIA-468-B and JIS-C-0805

PKT2, P1KT2, UKT2

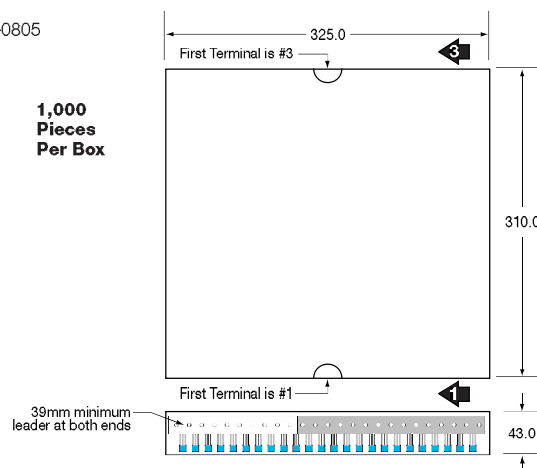

1,000
Pieces
Per Box

GF063-K Series

Part Numbering System

GF063 P1 K T2 B 102 K

Resistance Tolerance: K = $\pm 10\%$; M = $\pm 20\%$

Resistance Code: Expressed in ohms. A three digit code where the first two digits are significant figures, and the third digit indicates the number of zeros that follow these figures (i.e., 100 = 10 Ω ; 101 = 100 Ω ; 102 = 1,000 Ω ; 105 = 1,000,000 Ω).

Resistance Taper: B = Linear.

Packaging: T2 = Tape and Ammo Box, PK, P1K and UK Top Adjust Models.

Adjustment Knob: K = Knob.

Terminal Style: P, P1, W, U = 3-Lead Configurations, Top Adjust.

S, S1, X, X1, V, V1 = 3-Lead Configurations, Side Adjust.

TOCOS Series Name.

Part Numbers

Nominal Resistance		Resistance Tolerance $\pm 10\%$		Resistance Tolerance $\pm 20\%$		Potentiometer Styles
Value (Ω)	Code	Catalog No. Tape & Ammo Box	Catalog No. Bulk	Catalog No. Tape & Ammo Box	Catalog No. Bulk	

GF063PK Through-Hole, P Terminal Style, Top Adjust Knob

10	100	GF063PKT2 B 100 K	GF063PK B 100 K	GF063PKT2 B 100 M	GF063PK B 100 M	
20	200	GF063PKT2 B 200 K	GF063PK B 200 K	GF063PKT2 B 200 M	GF063PK B 200 M	
50	500	GF063PKT2 B 500 K	GF063PK B 500 K	GF063PKT2 B 500 M	GF063PK B 500 M	
100	101	GF063PKT2 B 101 K	GF063PK B 101 K	GF063PKT2 B 101 M	GF063PK B 101 M	
200	201	GF063PKT2 B 201 K	GF063PK B 201 K	GF063PKT2 B 201 M	GF063PK B 201 M	
500	501	GF063PKT2 B 501 K	GF063PK B 501 K	GF063PKT2 B 501 M	GF063PK B 501 M	
1,000	102	GF063PKT2 B 102 K	GF063PK B 102 K	GF063PKT2 B 102 M	GF063PK B 102 M	
2,000	202	GF063PKT2 B 202 K	GF063PK B 202 K	GF063PKT2 B 202 M	GF063PK B 202 M	
5,000	502	GF063PKT2 B 502 K	GF063PK B 502 K	GF063PKT2 B 502 M	GF063PK B 502 M	
10,000	103	GF063PKT2 B 103 K	GF063PK B 103 K	GF063PKT2 B 103 M	GF063PK B 103 M	
20,000	203	GF063PKT2 B 203 K	GF063PK B 203 K	GF063PKT2 B 203 M	GF063PK B 203 M	
50,000	503	GF063PKT2 B 503 K	GF063PK B 503 K	GF063PKT2 B 503 M	GF063PK B 503 M	
100,000	104	GF063PKT2 B 104 K	GF063PK B 104 K	GF063PKT2 B 104 M	GF063PK B 104 M	
200,000	204	GF063PKT2 B 204 K	GF063PK B 204 K	GF063PKT2 B 204 M	GF063PK B 204 M	
500,000	504	GF063PKT2 B 504 K	GF063PK B 504 K	GF063PKT2 B 504 M	GF063PK B 504 M	
1,000,000	105	GF063PKT2 B 105 K	GF063PK B 105 K	GF063PKT2 B 105 M	GF063PK B 105 M	
2,000,000	205	GF063PKT2 B 205 K	GF063PK B 205 K	GF063PKT2 B 205 M	GF063PK B 205 M	GF063PK
5,000,000	505	GF063PKT2 B 505 K	GF063PK B 505 K	GF063PKT2 B 505 M	GF063PK B 505 M	

GF063P1K Through-Hole, P1 Terminal Style, Top Adjust Knob

10	100	GF063P1KT2 B 100 K	GF063P1K B 100 K	GF063P1KT2 B 100 M	GF063P1K B 100 M	
20	200	GF063P1KT2 B 200 K	GF063P1K B 200 K	GF063P1KT2 B 200 M	GF063P1K B 200 M	
50	500	GF063P1KT2 B 500 K	GF063P1K B 500 K	GF063P1KT2 B 500 M	GF063P1K B 500 M	
100	101	GF063P1KT2 B 101 K	GF063P1K B 101 K	GF063P1KT2 B 101 M	GF063P1K B 101 M	
200	201	GF063P1KT2 B 201 K	GF063P1K B 201 K	GF063P1KT2 B 201 M	GF063P1K B 201 M	
500	501	GF063P1KT2 B 501 K	GF063P1K B 501 K	GF063P1KT2 B 501 M	GF063P1K B 501 M	
1,000	102	GF063P1KT2 B 102 K	GF063P1K B 102 K	GF063P1KT2 B 102 M	GF063P1K B 102 M	
2,000	202	GF063P1KT2 B 202 K	GF063P1K B 202 K	GF063P1KT2 B 202 M	GF063P1K B 202 M	
5,000	502	GF063P1KT2 B 502 K	GF063P1K B 502 K	GF063P1KT2 B 502 M	GF063P1K B 502 M	
10,000	103	GF063P1KT2 B 103 K	GF063P1K B 103 K	GF063P1KT2 B 103 M	GF063P1K B 103 M	
20,000	203	GF063P1KT2 B 203 K	GF063P1K B 203 K	GF063P1KT2 B 203 M	GF063P1K B 203 M	
50,000	503	GF063P1KT2 B 503 K	GF063P1K B 503 K	GF063P1KT2 B 503 M	GF063P1K B 503 M	
100,000	104	GF063P1KT2 B 104 K	GF063P1K B 104 K	GF063P1KT2 B 104 M	GF063P1K B 104 M	
200,000	204	GF063P1KT2 B 204 K	GF063P1K B 204 K	GF063P1KT2 B 204 M	GF063P1K B 204 M	
500,000	504	GF063P1KT2 B 504 K	GF063P1K B 504 K	GF063P1KT2 B 504 M	GF063P1K B 504 M	
1,000,000	105	GF063P1KT2 B 105 K	GF063P1K B 105 K	GF063P1KT2 B 105 M	GF063P1K B 105 M	GF063P1K
2,000,000	205	GF063P1KT2 B 205 K	GF063P1K B 205 K	GF063P1KT2 B 205 M	GF063P1K B 205 M	
5,000,000	505	GF063P1KT2 B 505 K	GF063P1K B 505 K	GF063P1KT2 B 505 M	GF063P1K B 505 M	

TOCOSAMERICA, INC.

1177 East Tower Road, Schaumburg, IL 60173 Tel: 847-884-6664 Fax: 847-884-6665 E-mail: sales@tocos.com www.tocos.com

GF063-K Series

Part Numbers

Nominal Resistance		Resistance Tolerance $\pm 10\%$		Resistance Tolerance $\pm 20\%$		Potentiometer Styles
Value (Ω)	Code	Catalog No. Tape & Ammo Box	Catalog No. Bulk	Catalog No. Tape & Ammo Box	Catalog No. Bulk	

GF063WK Through-Hole, W Terminal Style, Top Adjust Knob

10	100	—	GF063WK B 100 K	—	GF063WK B 100 M
20	200	—	GF063WK B 200 K	—	GF063WK B 200 M
50	500	—	GF063WK B 500 K	—	GF063WK B 500 M
100	101	—	GF063WK B 101 K	—	GF063WK B 101 M
200	201	—	GF063WK B 201 K	—	GF063WK B 201 M
500	501	—	GF063WK B 501 K	—	GF063WK B 501 M
1,000	102	—	GF063WK B 102 K	—	GF063WK B 102 M
2,000	202	—	GF063WK B 202 K	—	GF063WK B 202 M
5,000	502	—	GF063WK B 502 K	—	GF063WK B 502 M
10,000	103	—	GF063WK B 103 K	—	GF063WK B 103 M
20,000	203	—	GF063WK B 203 K	—	GF063WK B 203 M
50,000	503	—	GF063WK B 503 K	—	GF063WK B 503 M
100,000	104	—	GF063WK B 104 K	—	GF063WK B 104 M
200,000	204	—	GF063WK B 204 K	—	GF063WK B 204 M
500,000	504	—	GF063WK B 504 K	—	GF063WK B 504 M
1,000,000	105	—	GF063WK B 105 K	—	GF063WK B 105 M
2,000,000	205	—	GF063WK B 205 K	—	GF063WK B 205 M
5,000,000	505	—	GF063WK B 505 K	—	GF063WK B 505 M



GF063WK

GF063UK Through-Hole, U Terminal Style, Top Adjust Knob

10	100	GF063UKT2 B 100 K	GF063UK B 100 K	GF063UKT2 B 100 M	GF063UK B 100 M
20	200	GF063UKT2 B 200 K	GF063UK B 200 K	GF063UKT2 B 200 M	GF063UK B 200 M
50	500	GF063UKT2 B 500 K	GF063UK B 500 K	GF063UKT2 B 500 M	GF063UK B 500 M
100	101	GF063UKT2 B 101 K	GF063UK B 101 K	GF063UKT2 B 101 M	GF063UK B 101 M
200	201	GF063UKT2 B 201 K	GF063UK B 201 K	GF063UKT2 B 201 M	GF063UK B 201 M
500	501	GF063UKT2 B 501 K	GF063UK B 501 K	GF063UKT2 B 501 M	GF063UK B 501 M
1,000	102	GF063UKT2 B 102 K	GF063UK B 102 K	GF063UKT2 B 102 M	GF063UK B 102 M
2,000	202	GF063UKT2 B 202 K	GF063UK B 202 K	GF063UKT2 B 202 M	GF063UK B 202 M
5,000	502	GF063UKT2 B 502 K	GF063UK B 502 K	GF063UKT2 B 502 M	GF063UK B 502 M
10,000	103	GF063UKT2 B 103 K	GF063UK B 103 K	GF063UKT2 B 103 M	GF063UK B 103 M
20,000	203	GF063UKT2 B 203 K	GF063UK B 203 K	GF063UKT2 B 203 M	GF063UK B 203 M
50,000	503	GF063UKT2 B 503 K	GF063UK B 503 K	GF063UKT2 B 503 M	GF063UK B 503 M
100,000	104	GF063UKT2 B 104 K	GF063UK B 104 K	GF063UKT2 B 104 M	GF063UK B 104 M
200,000	204	GF063UKT2 B 204 K	GF063UK B 204 K	GF063UKT2 B 204 M	GF063UK B 204 M
500,000	504	GF063UKT2 B 504 K	GF063UK B 504 K	GF063UKT2 B 504 M	GF063UK B 504 M
1,000,000	105	GF063UKT2 B 105 K	GF063UK B 105 K	GF063UKT2 B 105 M	GF063UK B 105 M
2,000,000	205	GF063UKT2 B 205 K	GF063UK B 205 K	GF063UKT2 B 205 M	GF063UK B 205 M
5,000,000	505	GF063UKT2 B 505 K	GF063UK B 505 K	GF063UKT2 B 505 M	GF063UK B 505 M



GF063UK

GF063SK Through-Hole, S Terminal Style, Side Adjust Knob

10	100	—	GF063SK B 100 K	—	GF063SK B 100 M
20	200	—	GF063SK B 200 K	—	GF063SK B 200 M
50	500	—	GF063SK B 500 K	—	GF063SK B 500 M
100	101	—	GF063SK B 101 K	—	GF063SK B 101 M
200	201	—	GF063SK B 201 K	—	GF063SK B 201 M
500	501	—	GF063SK B 501 K	—	GF063SK B 501 M
1,000	102	—	GF063SK B 102 K	—	GF063SK B 102 M
2,000	202	—	GF063SK B 202 K	—	GF063SK B 202 M
5,000	502	—	GF063SK B 502 K	—	GF063SK B 502 M
10,000	103	—	GF063SK B 103 K	—	GF063SK B 103 M
20,000	203	—	GF063SK B 203 K	—	GF063SK B 203 M
50,000	503	—	GF063SK B 503 K	—	GF063SK B 503 M
100,000	104	—	GF063SK B 104 K	—	GF063SK B 104 M
200,000	204	—	GF063SK B 204 K	—	GF063SK B 204 M
500,000	504	—	GF063SK B 504 K	—	GF063SK B 504 M
1,000,000	105	—	GF063SK B 105 K	—	GF063SK B 105 M
2,000,000	205	—	GF063SK B 205 K	—	GF063SK B 205 M
5,000,000	505	—	GF063SK B 505 K	—	GF063SK B 505 M



GF063SK

GF063-K Series

Part Numbers

Nominal Resistance		Resistance Tolerance $\pm 10\%$		Resistance Tolerance $\pm 20\%$		Potentiometer Styles
Value (Ω)	Code	Catalog No. Tape & Ammo Box	Catalog No. Bulk	Catalog No. Tape & Ammo Box	Catalog No. Bulk	

GF063S1K Through-Hole, S1 Terminal Style, Side Adjust Knob

10	100	—	GF063S1K B 100 K	—	GF063S1K B 100 M	
20	200	—	GF063S1K B 200 K	—	GF063S1K B 200 M	
50	500	—	GF063S1K B 500 K	—	GF063S1K B 500 M	
100	101	—	GF063S1K B 101 K	—	GF063S1K B 101 M	
200	201	—	GF063S1K B 201 K	—	GF063S1K B 201 M	
500	501	—	GF063S1K B 501 K	—	GF063S1K B 501 M	
1,000	102	—	GF063S1K B 102 K	—	GF063S1K B 102 M	
2,000	202	—	GF063S1K B 202 K	—	GF063S1K B 202 M	
5,000	502	—	GF063S1K B 502 K	—	GF063S1K B 502 M	
10,000	103	—	GF063S1K B 103 K	—	GF063S1K B 103 M	
20,000	203	—	GF063S1K B 203 K	—	GF063S1K B 203 M	
50,000	503	—	GF063S1K B 503 K	—	GF063S1K B 503 M	
100,000	104	—	GF063S1K B 104 K	—	GF063S1K B 104 M	
200,000	204	—	GF063S1K B 204 K	—	GF063S1K B 204 M	
500,000	504	—	GF063S1K B 504 K	—	GF063S1K B 504 M	
1,000,000	105	—	GF063S1K B 105 K	—	GF063S1K B 105 M	
2,000,000	205	—	GF063S1K B 205 K	—	GF063S1K B 205 M	
5,000,000	505	—	GF063S1K B 505 K	—	GF063S1K B 505 M	

GF063S1K

GF063XK Through-Hole, X Terminal Style, Side Adjust Knob

10	100	—	GF063XK B 100 K	—	GF063XK B 100 M	
20	200	—	GF063XK B 200 K	—	GF063XK B 200 M	
50	500	—	GF063XK B 500 K	—	GF063XK B 500 M	
100	101	—	GF063XK B 101 K	—	GF063XK B 101 M	
200	201	—	GF063XK B 201 K	—	GF063XK B 201 M	
500	501	—	GF063XK B 501 K	—	GF063XK B 501 M	
1,000	102	—	GF063XK B 102 K	—	GF063XK B 102 M	
2,000	202	—	GF063XK B 202 K	—	GF063XK B 202 M	
5,000	502	—	GF063XK B 502 K	—	GF063XK B 502 M	
10,000	103	—	GF063XK B 103 K	—	GF063XK B 103 M	
20,000	203	—	GF063XK B 203 K	—	GF063XK B 203 M	
50,000	503	—	GF063XK B 503 K	—	GF063XK B 503 M	
100,000	104	—	GF063XK B 104 K	—	GF063XK B 104 M	
200,000	204	—	GF063XK B 204 K	—	GF063XK B 204 M	
500,000	504	—	GF063XK B 504 K	—	GF063XK B 504 M	
1,000,000	105	—	GF063XK B 105 K	—	GF063XK B 105 M	
2,000,000	205	—	GF063XK B 205 K	—	GF063XK B 205 M	
5,000,000	505	—	GF063XK B 505 K	—	GF063XK B 505 M	

GF063XK

GF063X1K Through-Hole, X1 Terminal Style, Side Adjust Knob

10	100	—	GF063X1K B 100 K	—	GF063X1K B 100 M	
20	200	—	GF063X1K B 200 K	—	GF063X1K B 200 M	
50	500	—	GF063X1K B 500 K	—	GF063X1K B 500 M	
100	101	—	GF063X1K B 101 K	—	GF063X1K B 101 M	
200	201	—	GF063X1K B 201 K	—	GF063X1K B 201 M	
500	501	—	GF063X1K B 501 K	—	GF063X1K B 501 M	
1,000	102	—	GF063X1K B 102 K	—	GF063X1K B 102 M	
2,000	202	—	GF063X1K B 202 K	—	GF063X1K B 202 M	
5,000	502	—	GF063X1K B 502 K	—	GF063X1K B 502 M	
10,000	103	—	GF063X1K B 103 K	—	GF063X1K B 103 M	
20,000	203	—	GF063X1K B 203 K	—	GF063X1K B 203 M	
50,000	503	—	GF063X1K B 503 K	—	GF063X1K B 503 M	
100,000	104	—	GF063X1K B 104 K	—	GF063X1K B 104 M	
200,000	204	—	GF063X1K B 204 K	—	GF063X1K B 204 M	
500,000	504	—	GF063X1K B 504 K	—	GF063X1K B 504 M	
1,000,000	105	—	GF063X1K B 105 K	—	GF063X1K B 105 M	
2,000,000	205	—	GF063X1K B 205 K	—	GF063X1K B 205 M	
5,000,000	505	—	GF063X1K B 505 K	—	GF063X1K B 505 M	

GF063X1K

TOCOSAMERICA, INC.

1177 East Tower Road, Schaumburg, IL 60173 Tel: 847-884-6664 Fax: 847-884-6665 E-mail: sales@tocos.com www.tocos.com

GF063-K Series

Part Numbers

Nominal Resistance		Resistance Tolerance $\pm 10\%$		Resistance Tolerance $\pm 20\%$		Potentiometer Styles
Value (Ω)	Code	Catalog No. Tape & Ammo Box	Catalog No. Bulk	Catalog No. Tape & Ammo Box	Catalog No. Bulk	

GF063VK Through-Hole, V Terminal Style, Side Adjust Knob

10	100	—	GF063VK B 100 K	—	GF063VK B 100 M
20	200	—	GF063VK B 200 K	—	GF063VK B 200 M
50	500	—	GF063VK B 500 K	—	GF063VK B 500 M
100	101	—	GF063VK B 101 K	—	GF063VK B 101 M
200	201	—	GF063VK B 201 K	—	GF063VK B 201 M
500	501	—	GF063VK B 501 K	—	GF063VK B 501 M
1,000	102	—	GF063VK B 102 K	—	GF063VK B 102 M
2,000	202	—	GF063VK B 202 K	—	GF063VK B 202 M
5,000	502	—	GF063VK B 502 K	—	GF063VK B 502 M
10,000	103	—	GF063VK B 103 K	—	GF063VK B 103 M
20,000	203	—	GF063VK B 203 K	—	GF063VK B 203 M
50,000	503	—	GF063VK B 503 K	—	GF063VK B 503 M
100,000	104	—	GF063VK B 104 K	—	GF063VK B 104 M
200,000	204	—	GF063VK B 204 K	—	GF063VK B 204 M
500,000	504	—	GF063VK B 504 K	—	GF063VK B 504 M
1,000,000	105	—	GF063VK B 105 K	—	GF063VK B 105 M
2,000,000	205	—	GF063VK B 205 K	—	GF063VK B 205 M
5,000,000	505	—	GF063VK B 505 K	—	GF063VK B 505 M



GF063VK

GF063V1K Through-Hole, V1 Terminal Style, Side Adjust Knob

10	100	—	GF063V1K B 100 K	—	GF063V1K B 100 M
20	200	—	GF063V1K B 200 K	—	GF063V1K B 200 M
50	500	—	GF063V1K B 500 K	—	GF063V1K B 500 M
100	101	—	GF063V1K B 101 K	—	GF063V1K B 101 M
200	201	—	GF063V1K B 201 K	—	GF063V1K B 201 M
500	501	—	GF063V1K B 501 K	—	GF063V1K B 501 M
1,000	102	—	GF063V1K B 102 K	—	GF063V1K B 102 M
2,000	202	—	GF063V1K B 202 K	—	GF063V1K B 202 M
5,000	502	—	GF063V1K B 502 K	—	GF063V1K B 502 M
10,000	103	—	GF063V1K B 103 K	—	GF063V1K B 103 M
20,000	203	—	GF063V1K B 203 K	—	GF063V1K B 203 M
50,000	503	—	GF063V1K B 503 K	—	GF063V1K B 503 M
100,000	104	—	GF063V1K B 104 K	—	GF063V1K B 104 M
200,000	204	—	GF063V1K B 204 K	—	GF063V1K B 204 M
500,000	504	—	GF063V1K B 504 K	—	GF063V1K B 504 M
1,000,000	105	—	GF063V1K B 105 K	—	GF063V1K B 105 M
2,000,000	205	—	GF063V1K B 205 K	—	GF063V1K B 205 M
5,000,000	505	—	GF063V1K B 505 K	—	GF063V1K B 505 M



GF063V1K

Packaging

Standard:

Tape & Ammo Packaging

PKT2, P1KT2 & UT2

1,000 pieces per ammo box.

Bulk Packaging

All GF063-K Models

50 pieces per vinyl bag.

500 pieces per box.

Soldering and Cleaning Guidelines

For soldering, cleaning and other information, refer to Guidelines and Precautions for Using Potentiometers.