



SINGLE-PHASE GLASS PASSIVATED BRIDGE RECTIFIER

GBLA005 THRU GBLA10

VOLTAGE RANGE

50 to 1000 Volts

CURRENT


4.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junctions
- High case dielectric strength
- High surge current capability
- Ideal for printed circuit boards
- High temperature soldering guaranteed 260°C/10 seconds, 0.375"(9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

- Case: molded plastic body
- Terminal: Plated leads solderable per MIL-STD-750 Method 2026
- Mounting position: Any
- Weight: 0.071 ounce, 2.0 gram

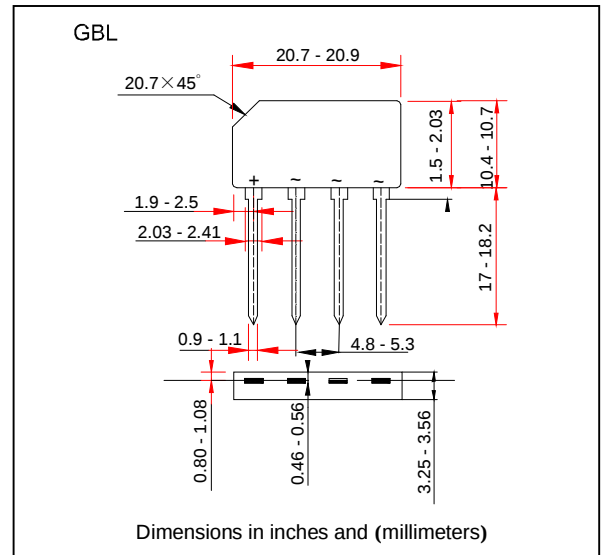

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	GBLA 005	GBLA 01	GBLA 02	GBLA 04	GBLA 06	GBLA 08	GBLA 10	UNIT
Maximum Reverse Peak Repetitive Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current, At T _C =50°C T _A =40°C		I _(AV)	4.0(Note 1) 3.0(Note 2)							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)		I _{FSM}	120							Amps
Rating for Fusing (t<8.3ms)		I ² t	60							A ² s
Maximum Instantaneous Forward Voltage drop Per Bridge element 4.0A		V _F	1.0							Volts
Maximum Reverse Current at rated DC blocking voltage per element	T _A =25°C	I _R	5.0							μ A
	T _A =125°C		500							
Typical Junction Capacitance per leg (Note 3)		C _J	95.0			40.0				pF
Typical Thermal Resistance (Note 1)		R _{JA}	22							°C/W
Typical Thermal Resistance (Note 2)		R _{JL}	10							°C/W
Operating and Storage Temperature Range		T _J ,T _{STG}	(-55 to +150)							°C

- Notes:**
1. Unit mounted on 3.0×3.0×0.11" thick (7.5×7.5×0.3cm) AL. plate
 2. Unit mounted on P.C.B. at 0.375" (9.5mm) lead length and 0.5×0.5"(12×12mm) copper pads
 3. Measured at 1.0MHz and applied reverse voltage of 4.0 V



SINGLE-PHASE GLASS PASSIVATED BRIDGE RECTIFIER

GBLA005 THRU GBLA10

VOLTAGE RANGE

50 to 1000Volts

CURRENT

4.0 Ampere

RATINGS AND CHARACTERISTIC CURVES GBLA005 THRU GBLA10

FIG. 1- DERATING CURVE
OUTPUT RECTIFIED CURRENT

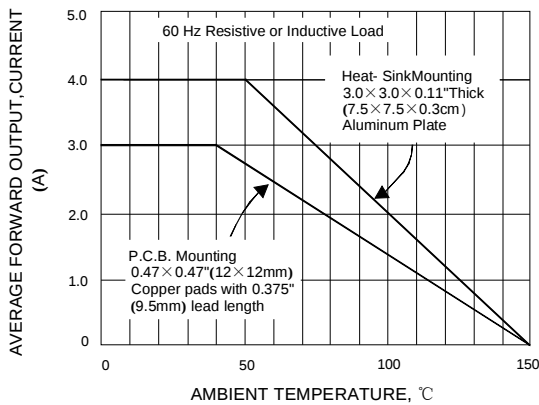


FIG. 2- MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT PER LEG

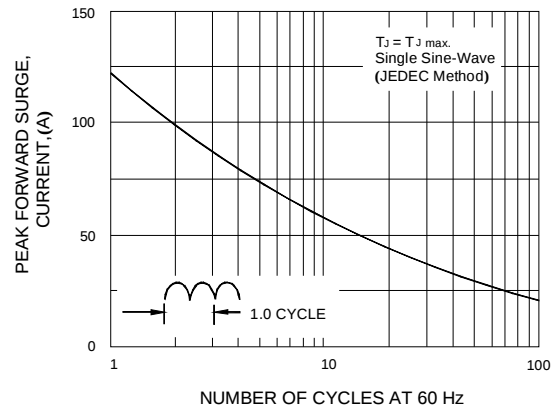


FIG. 3- TYPICAL FORWARD VOLTAGE
CHARACTERISTICS PER LEG

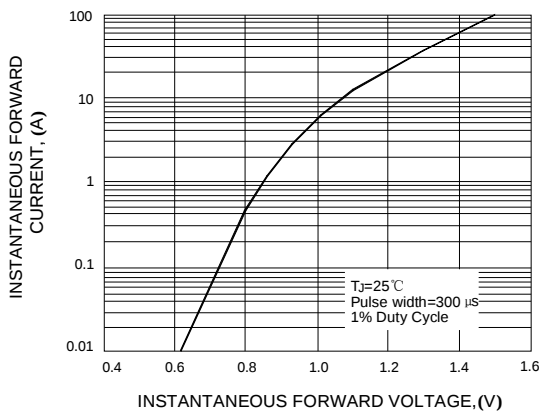


FIG. 4- TYPICAL REVERSE LEAKAGE
CHARACTERISTICS PER LEG

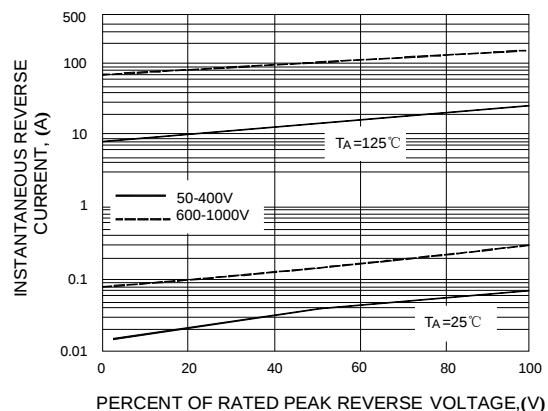


FIG. 5- TYPICAL JUNCTION CAPACITANCE
PER LEG

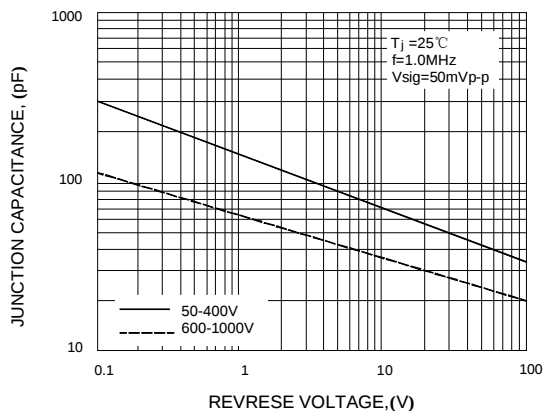


FIG. 6- TYPICAL TRANSIENT THERMAL
IMPEDANCE PER LEG

