

POWER RELAY

1 POLE - 10A High Sensitivity

FTR-K1 Series

RoHS compliant

■ FEATURES

- Low profile (height: 15.7mm)
- HIGH ISOLATION
Insulation Distance (between coil and contacts): 10mm min.
Dielectric strength: 5KV
Surge strength: 10KV
- UL F Class wire
- Low coil power (400mW)
- Cadmium free contacts
- SAFETY STANDARDS
UL, CSA, VDE, SEMKO approved
UL, CSA TV-5 rating approved (1 form A type)
- RoHS Compliant
- UL F class isolation
- VDE Glow-wire ignitability test 775 (IEC60335-1) approved



■ ORDERING INFORMATION

[Example] FTR-K1 A L 005 W LA (- BG)
 (a) (b) (c) (d) (e) (f) (g)

(a)	Series Name	FTR-K1 : FTR-K1 Series					
(b)	Contact Arrangement	A : 1 form A (SPST-NO)					
(c)	Coil Type / Enclosure	L : High sensitivity (200 mW) / flux free					
(d)	Nominal Voltage	005 : 5 VDC, 018 : 18 VDC	006 : 6VDC, 024 : 24VDC,	009 : 9VDC 048 : 48VDC	012 : 12VDC		
(e)	Contact Material / TV type	W : AgSnO2					
(f)	Terminal Pitch	LA : 10A high sensitive (250mW) 3.5mm pitch LB : 10A high sensitive (250mW) 5.0mm pitch					
(f)	Special Designation	BG : Gold plated ; 3μm					

Actual marking does not carry the type name : "FTR"

E.g.: Ordering code: FTR-K1AL012WLA Actual marking: K1AL012WLA

FTR-K1 SERIES

■ PART NUMBERS

250mW type

Ordering Part Number	Series	Contact	Coil Power	Coil Voltage	Contact Material	Terminal Pitch	Special
FTR-K1AL005W-LA-(BG)	FTR-K1	A: 1 form A	L: 250 mW	5	W: Ag-SnO2	LA: 10A 3.5mm pitch	BG: Gold plated
FTR-K1AL006W-LA-(BG)				6			
FTR-K1AL009W-LA-(BG)				9			
FTR-K1AL012W-LA-(BG)				12			
FTR-K1AL018W-LA-(BG)				18			
FTR-K1AL024W-LA-(BG)				24			
FTR-K1AL048W-LA-(BG)				48			
FTR-K1AL005W-LB-(BG)				5		LB: 10A 5.0mm pitch	
FTR-K1AL006W-LB-(BG)				6			
FTR-K1AL009W-LB-(BG)				9			
FTR-K1AL012W-LB-(BG)				12			
FTR-K1AL018W-LB-(BG)				18			
FTR-K1AL024W-LB-(BG)				24			
FTR-K1AL048W-LB-(BG)				48			

■ COIL DATA CHART

Coil Voltage	Nominal Voltage (VDC)	Max. Coil Voltage* ¹	Coil Resistance (±10%)	Must Operate Voltage* ²	Must Release Voltage* ²	Nominal Power (mW)
005	5	15.0 VDC	100 Ω	3.75 VDC	0.5 VDC	250
006	6	18.0 VDC	145 Ω	4.5 VDC	0.6 VDC	
009	9	27.0 VDC	325 Ω	6.75 VDC	0.9 VDC	
012	12	36.0 VDC	575 Ω	9.0 VDC	1.2 VDC	
018	18	54.0 VDC	1,300 Ω	13.5 VDC	1.8 VDC	
024	24	72.0 VDC	2,310 Ω	18.0 VDC	2.4 VDC	
048	48	144.0 VDC	9,216 Ω	36.0 VDC	4.8 VDC	

Note: All values in the table are measured at 20°C.

*1: No contact current at 20°C

*2: Specified values are subject to pulse wave voltage

■ SPECIFICATIONS

Item			FTR-K1 AL () W- (LA, LB)
Contact	Arrangement		1 form A
	Material		AgSnO ₂
	Resistance (initial)		Maximum 100 mΩ at 1 A, 6 VDC
	Rating		10 A, 250 VAC
	Maximum Carrying Current*1		10 A
	Maximum Switching Rating		2,500VA
	Maximum Switching Voltage		440 VAC
	Minimum Switching Load*2		10 mA 5 VDC
Coil	Nominal Power (at 20°C)		250mW
	Operate Power (at 20°C)		141 mW
	Operating Temperature		-40°C to +85°C (no frost), (LB: -40°C to +105°C)
Time Value	Operate (without diode)		Maximum 15ms (at nominal voltage, no bounce)
	Release (without diode)		Maximum 5ms (at nominal voltage, no bounce)
Life	Mechanical		20 x 10 ⁶ operations minimum
	Electrical	AC Contact rating	100 x 10 ³ operations min.
		DC contact rating	-
Other	Vibration Resistance	Misoperation	10 to 55 Hz, at double amplitude of 0.7 mm
		Endurance	10-55Hz, at double amplitude of 1.5 mm
	Shock Resistance	Misoperation	Min. 100m/s ² (11±1ms)
		Endurance	Min. 1,000m/s ² (6±1ms)
	Weight		Approximately 13g

*1 Need to consider the heat from PCB when max. current is more than 10A.

*2 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

FTR-K1 SERIES

■ INSULATION







Item	FTR-K1	Note
Resistance (initial)	Minimum 1,000 MΩ 1 min.	at 500 VDC
Dielectric Strength	open contacts	1,000 VAC (50/60 Hz) 1 min.
	coil and contacts	5,000 VAC (50/60 Hz) 1 min.
Surge Voltage (coil and contact)	10,000 V	1.2 x 50μs standard wave
Clearance/Creepage	10 mm / 10 mm	
Insulation (DIN EN61810-1 VDE0435)		
Voltage	250 V	
Pollution	3	
Isolation material group	IIIa	
Isolation category / Reference voltage (VDE0110b)	C / 250 V	

■ SAFETY STANDARDS

Type	Compliance	Contact rating
UL	UL 508	Flammability: UL 94-V0 (plastics)
	E63614	FTR-K1AL ()W-(LA, LB) 10A, 277 VAC (resistive)
CSA	C22.2 No. 14	1/3 HP, 125VAC
	LR 40304	1/2 HP, 277VAC Pilot duty: B300 FTR-K1CL()W-LA 10A, 277 VAC (resistive)
VDE	0435, 0631, 0700, 0860	FTR-K1AL ()W-(LA, LB) 10A, 250 VAC, 150,000 cycles, LA: 85°C, LB:105°C 3A, 250 VAC (cosØ=0.4), 100,000 cycles, LA: 85°C, LB:105°C FTR-K1CL()W-LA 10A, 250VAC, 100,000 cycles, 85°C
SEMKO	EN 61058-1:1992 and A1	250VAC, 10 (3)A 40T85 (-LA)
	EN 61095:1993 and A1+A11	250VAC, 10 (3)A 40T105(-LB)

Complies with NEMKO, DEMKO, FIMKO

CHARACTERISTIC DATA

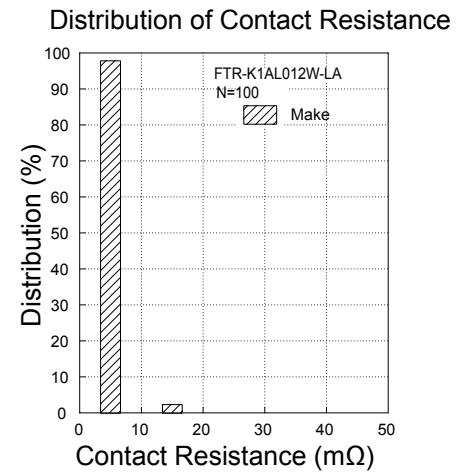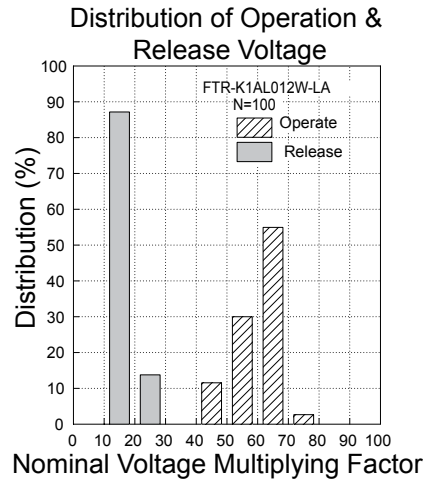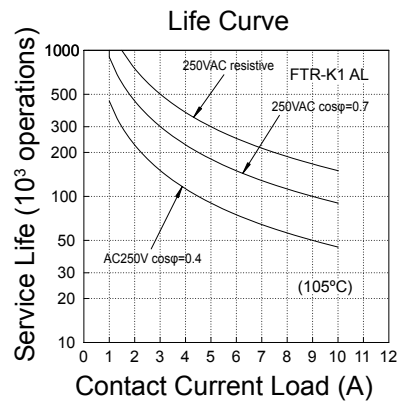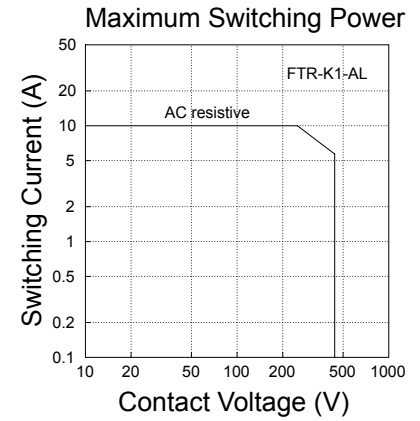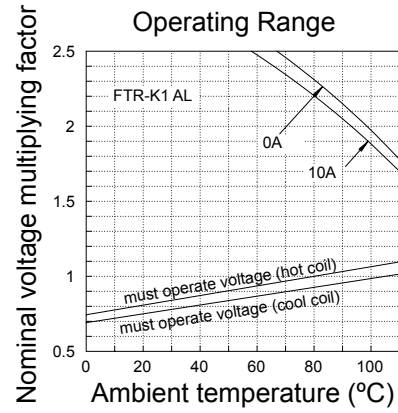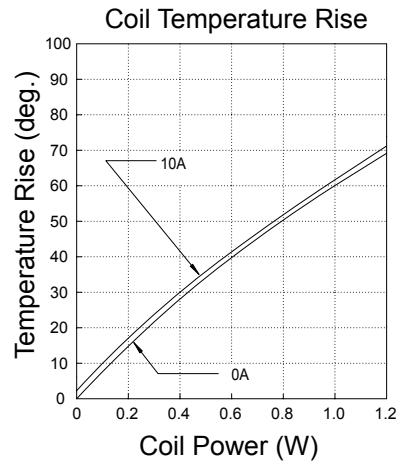


FTR-K1 SERIES


■ DIMENSIONS

- **Dimensions**


FTR-K1AL () W-LA

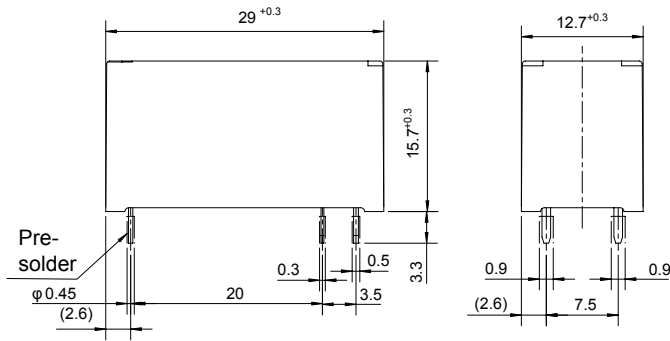

- Schematics
(BOTTOM VIEW)




● **PC board mounting
hole layout
(BOTTOM VIEW)**

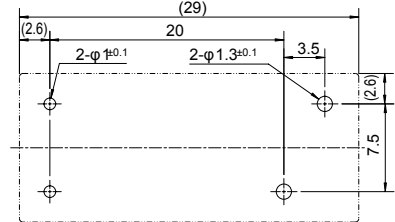


- **Dimensions**


FTR-K1AL () W-LB

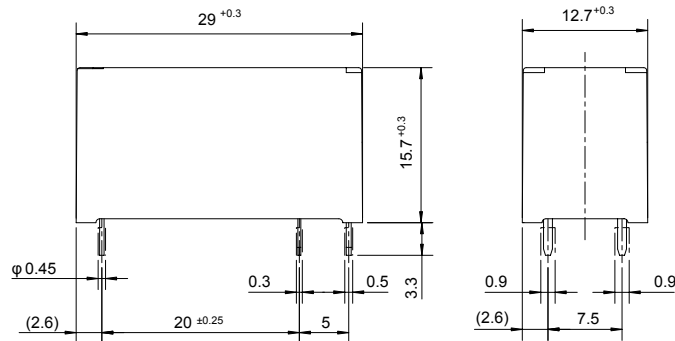

- Schematics
(BOTTOM VIEW)

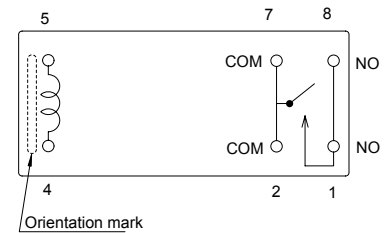

● **PC board mounting
hole layout
(BOTTOM VIEW)**

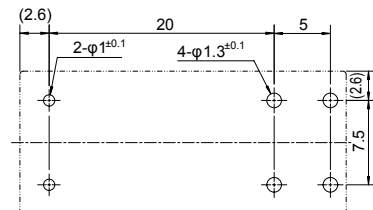

Unit: mm

RoHS Compliance and Lead Free Relay Information

1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
 - Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
 - All signal and power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE, DecaBDE).
 - It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
 - "LF" is marked on each outer and inner carton. (No marking on individual relays).
- Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

Solder condition

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at
260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://www.fujitsu.com/us/services/edevices/components/>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2008 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. July 21, 2008.