

**FESP05JA**

# Ultra fast Plastic Power Rectifiers

**VOLTAGE: 600V**

**CURRENT:5.0A**



## FEATURE

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- Ultra fast recovery time for high efficiency
- Excellent high temperature switching
- Glass passivated junction
- High voltage and high reliability
- High speed switching
- Low forward voltage


## MECHANICAL DATA

Case: JEDEC TO-220AC molded plastic body over passivated chip

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

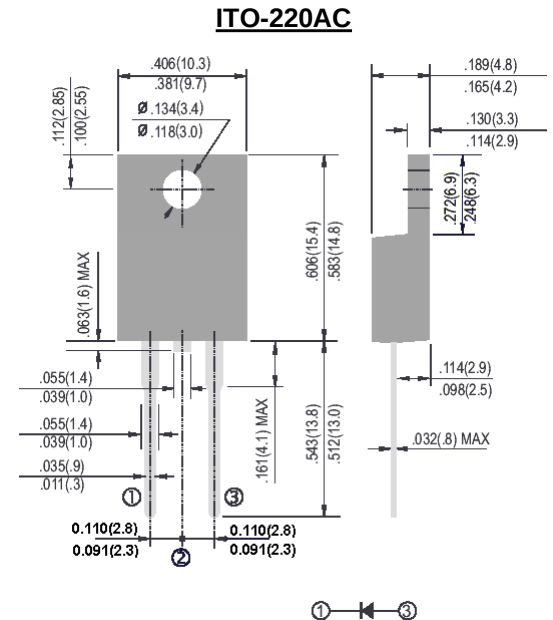

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

|                                                                                      | SYMBOL   | FESP05JA    | units    |
|--------------------------------------------------------------------------------------|----------|-------------|----------|
| Maximum Recurrent Peak Reverse Voltage                                               | Vrrm     | 600         | V        |
| Maximum RMS Voltage                                                                  | Vrms     | 420         | V        |
| Maximum DC blocking Voltage                                                          | Vdc      | 600         | V        |
| Maximum Average Forward Rectified<br>at Tc =100°C                                    | If(av)   | 5.0         | A        |
| Peak Forward Surge Current 8.3ms single<br>half sine-wave superimposed on rated load | Ifsm     | 90          | A        |
| Maximum Forward Voltage at rated Forward<br>Current and 25°C at 5A                   | Vf       | 1.5         | V        |
| Maximum Reverse Recovery Time (Note 1)                                               | Trr      | 50          | nS       |
| Typical thermal resistance junction to case                                          | R θ jc   | 5.0         | °C/W     |
| Maximum DC Reverse Current Ta =25°C<br>at rated DC blocking voltage Ta =125°C        | Ir       | 5<br>50     | μA<br>μA |
| Storage and Operating Temperature Range                                              | Tstg, Tj | -55 to +150 | °C       |


Note:

1. Reverse Recovery Condition  $I_f = 0.5A$ ,  $I_r = 1.0A$ ,  $I_{rr} = 0.25A$


**Fig. 1 – Forward Current Derating Curve**

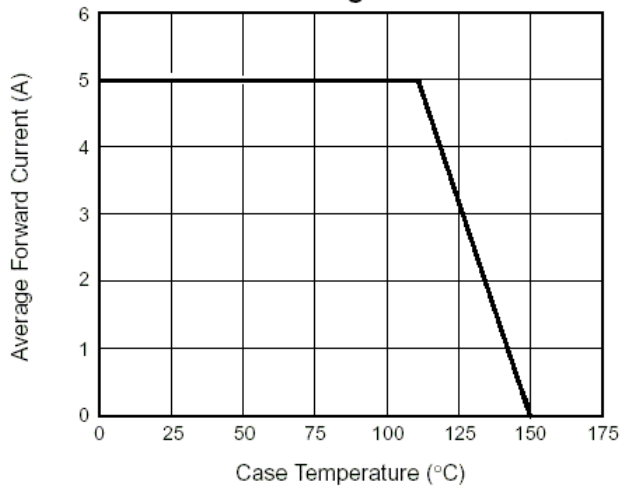


**Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current**

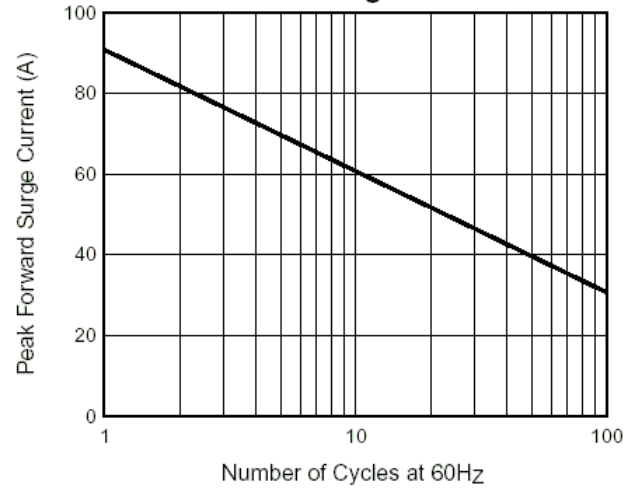

**Fig. 3 – Typical Reverse Current**

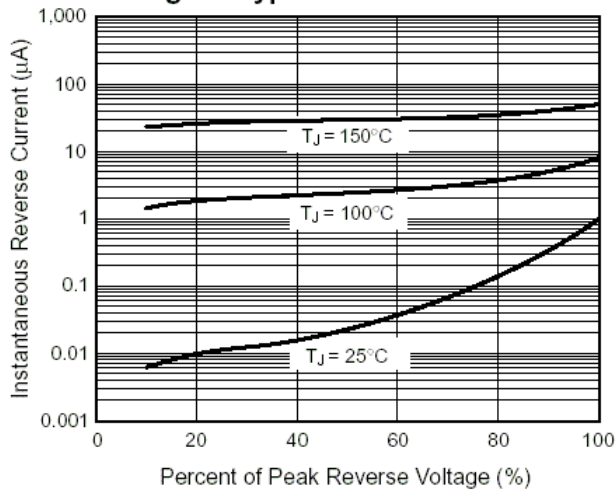

**Fig. 4 – Typical Forward Voltyage**

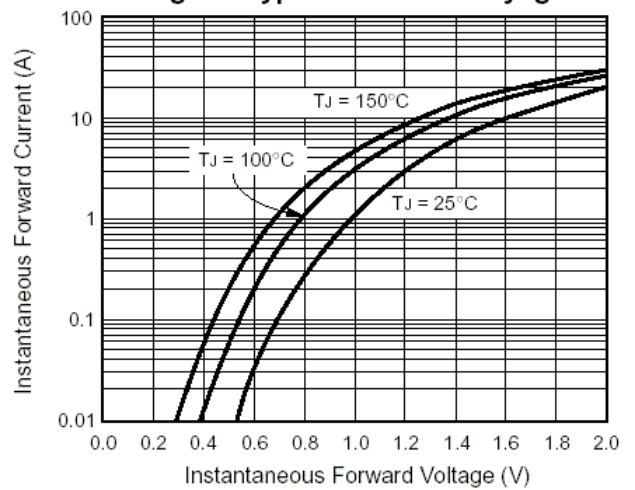

**Fig. 5 – Typical Junction Capacitance**

