



SINGLE PHASE BRIDGE RECTIFIER

FBR605 THRU FBR610

VOLTAGE RANGE

50 to 1000 Volts

CURRENT

6.0 Ampere

FEATURES


- Low cost
- High forward surge current capacity
- Fast switching high efficiency
- High temperature soldering guaranteed:
260°C / 10 seconds, at 5 lbs. (2.3kg) tension.

MECHANICAL DATA

- Case: Molded plastic body
- Terminal: Lead solderable per MIL-STD-202E method 208C
- Polarity: Polarity symbols marked on case
- Mounting: Thru hole for #6 screw, 5 in-lbs torque max.
- Weight: 0.13 ounce, 3.66 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

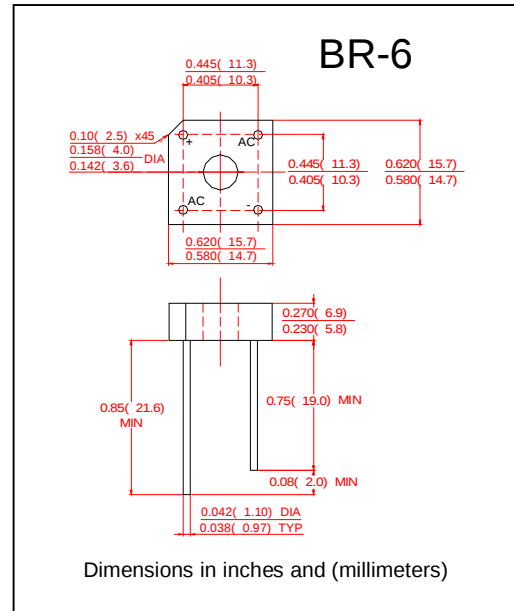

		SYMBOLS	FBR605	FBR61	FBR62	FBR64	FBR66	FBR68	FBR610	UNIT
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current, at	T _C = 50°C (Note 1)	I _{I(AV)}	6.0							Amps
	T _A = 25°C (Note 2)		3.0							
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)		I _{FSM}	125							Amps
Rating for Fusing (t<8.3mS)		I ² t	64							A ² s
Maximum Instantaneous Forward Voltage drop per Bridge element at 3.0 A		V _F	1.2				1.3			Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	T _A = 25°C	I _R	10							μA
	T _A = 100°C		1.0							mA
Maximum Reverse Recovery Time (Note3) T _J =25°C		T _{RR}	150				250	500		nS
Isolation Voltage from case to lug		V _{ISO}	2500							Volts
Typical Thermal Resistance (Note 1)		R _{θJc}	8.0							°C/W
Operating Temperature Rang		T _J	-55 to +150							°C
Storage Temperature Rang		T _{STG}	-55 to +150							°C

Notes:

1. Unit mounted on 6.0" x 5.5" x 0.11" thick (15×14×0.3cm) AL plate
2. Unit mounted on P.C. Board 0.375" (9.5mm) lead length with 0.47"×0.47" (12×12mm) copper pads.
3. Reverse Recovery test conditions: $I_F = 0.5A$, $I_R = 0.5A$, $I_{RR} = 0.25A$



SINGLE PHASE BRIDGE RECTIFIER

FBR605 THRU FBR610

VOLTAGE RANGE

50 to 1000 Volts

CURRENT

6.0 Ampere

RATINGS AND CHARACTERISTIC CURVES FBR605 THRU FBR610

FIG.1-DERATING CURVE FOR
OUTPUT RECTIFIED CURRENT

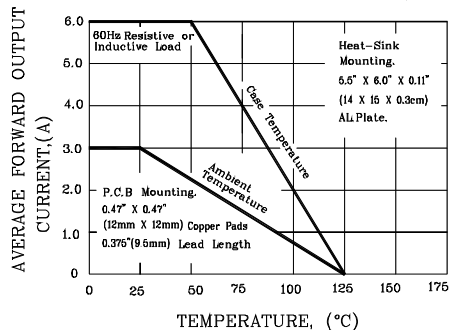


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT PER ELEMENT

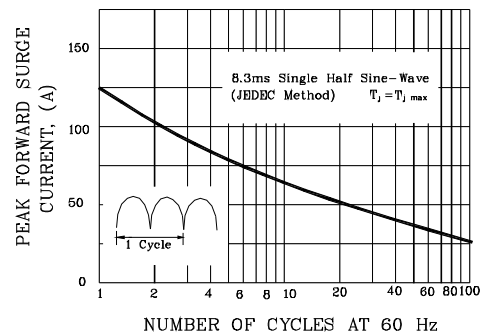


FIG.3-TYPICAL FORWARD CHARACTERISTICS
PER BRIDGE ELEMENT

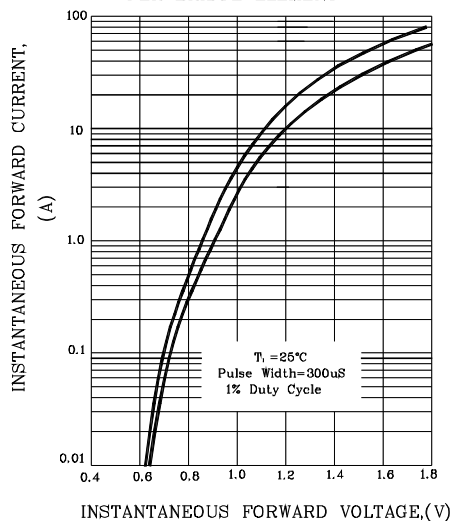


FIG.4-TYPICAL REVERSE CHARACTERISTICS
PER BRIDGE ELEMENT

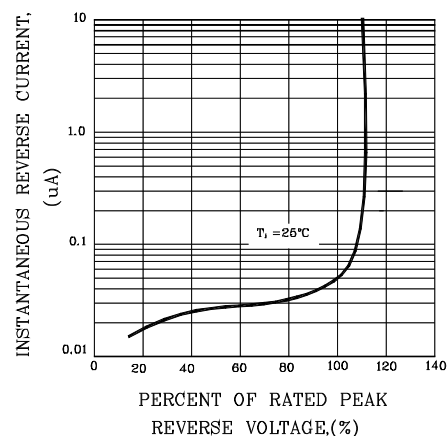


FIG.5-TYPICAL JUNCTION CAPACITANCE
PER BRIDGE ELEMENT

