


10 BASE-T LOW PASS FILTER

P/N:FB2022B-3 DATA SHEET

Page : 1/1

Feature




- Operating temperature range : 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.

Electrical Specifications @ 25°C

Part Number	CUT-OFF Frequency	Group Delay (ns Max)	Cross talk(dB Min)		HI-POT (Vrms)			
		5-10 MHz	1-10 MHz					
FB2022B-3	17 MHz ± 0.7MHz	4	-45		1500			
Continue								
Part Number	Insertion Loss (dB Max) TX/RX	Return Loss (dB Min) TX/RX	Attenuation (dB Min) TX/RX				CMR(dB Min)	
	1–10MHz	1-10MHz	20 MH z	25 MHz	30 MHz	40 MHz	50 MHz	70-100 MHz
FB2022B-3	-4.5	-15	-7/-6	-19/-14	-32/-20	-35/-31	-40/-35	-45

Continue

Schematic

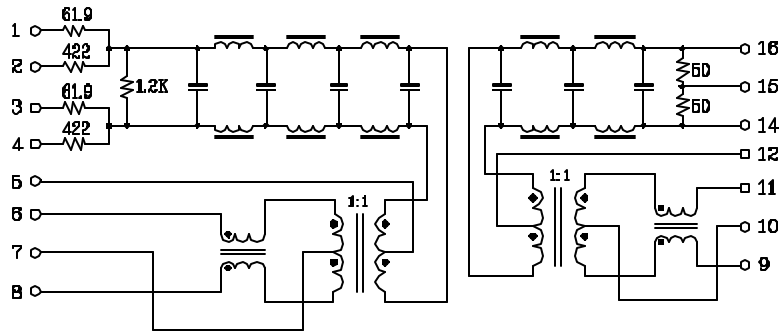

Mechanical

