


SAW Bandpass Filter F465A



Features

- RF bandpass filter for CDMA450 A-band Rx. Part
- Usable bandwidth 5MHz (462.5MHz ~ 467.5 MHz)
- High attenuation
- No matching 50Ω single-ended operation
- Ceramic Surface Mounted Device Package (3.8 mm × 3.8 mm)
- RoHS compliant

Package Dimensions

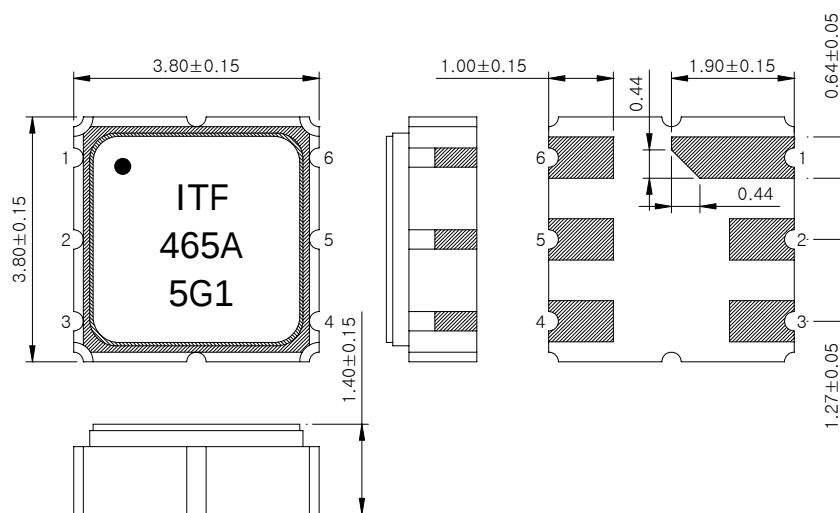

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um
Ni Plating

Pin Configurations

2	Input
5	Output
1, 3, 4, 6	Case ground

Maximum Ratings

Parameters	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	25	85
Storage Temperature Range	°C	-40	-	85
Power Handling Capability	dBm	-	-	27

Electrostatics Sensitive Device (ESD)

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F465A	
		Rev. Date	2006-06-08	
		Rev.	NR5004-AS03	1/7

SAW Bandpass Filter F465A



Specifications

	Minimum	Typical	Maximum	Unit
Center Frequency (Fc)	-	465.0	-	MHz
Insertion Loss (In Fc +/- 2.5 MHz)	-	2.6	3.5	dB
Amplitude Ripple (In Fc +/- 2.5 MHz)	-	0.8	1.5	dB
VSWR (In Fc +/- 2.5 MHz)	-	1.5	2.0	
Relative Attenuation 0.3 MHz ~ 452.5 MHz 452.5 MHz ~ 457.5 MHz 485.0 MHz ~ 495.5 MHz 495.5 MHz ~ 1200 MHz 1200 MHz ~ 1700 MHz	45 45 25 45 55	50 50 30 - -	- - - - -	dB
Temperature Range (Operational)	-30	25	85	℃
Input RF Power (In Fc +/- 2.5 MHz)			27	dBm
Input/Output Impedance		50		Ohms

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F465A	
		Rev. Date	2006-06-08	
		Rev.	NR5004-AS03	2/7

SAW Bandpass Filter F465A



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



Marking Configuration

- 1)
●
- ITF²⁾
- 465A³⁾
- 5G1⁴⁾

1) Pad Number 1 Index

2) Manufacturer name

3) Marking Number

4) Lot Number



*** Ink or Laser Marking available**

 Integrated Technology Future	I T F Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F465A	
		Rev. Date	2006-06-08	
		Rev.	NR5004-AS03	3/7

SAW Bandpass Filter F465A



Typical Performance (at 25 °C)

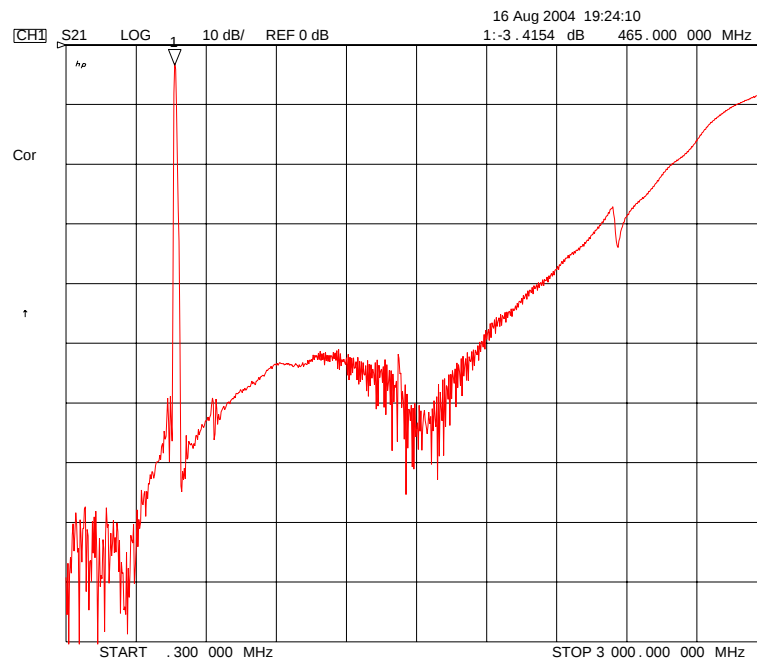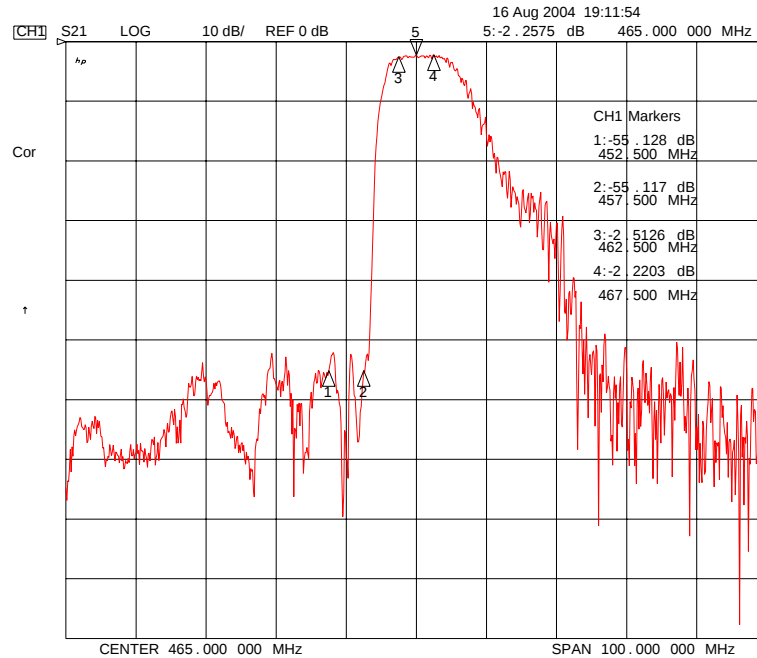

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.

F465A

Rev. Date

2006-06-08

Rev.



NR5004-AS03

4/7



SAW Bandpass Filter F465A



Input / Output VSWR Charts

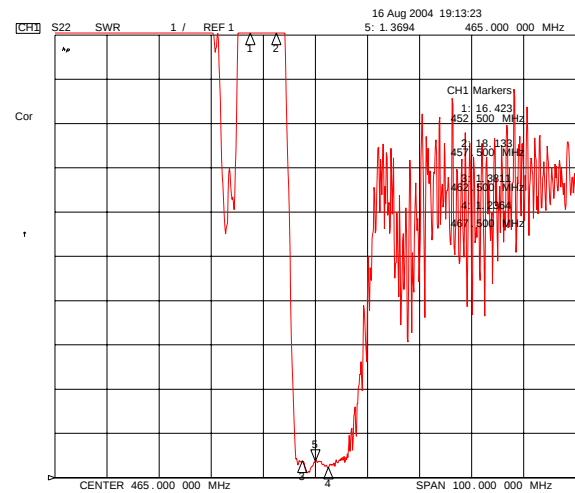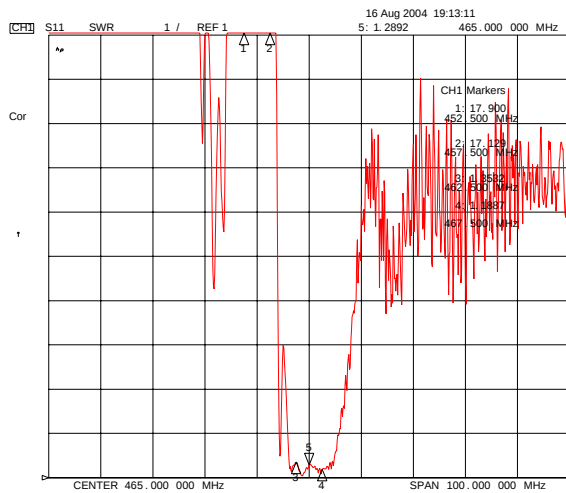

Input / Output Smith Charts

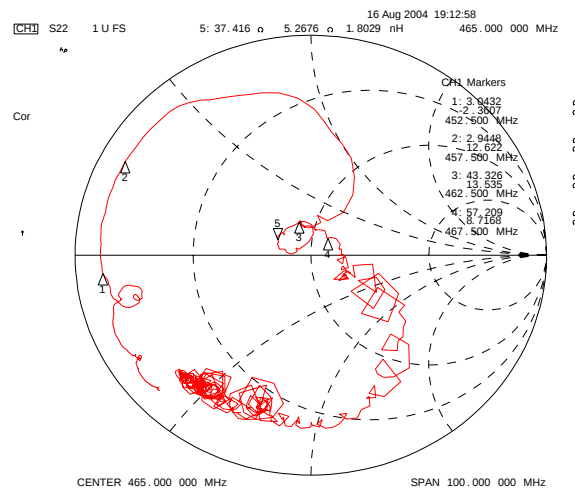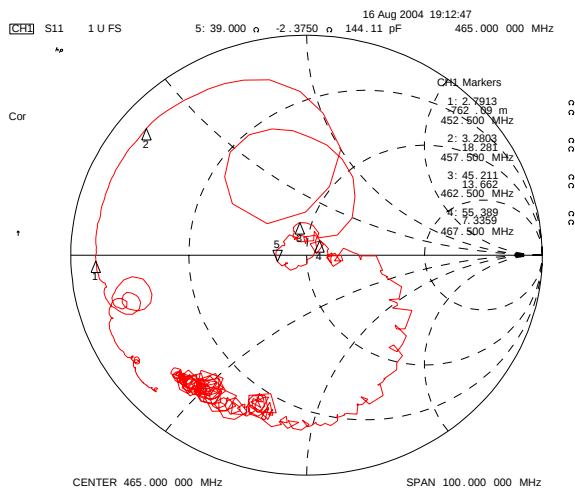


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No.		F465A	
			Rev. Date		2006-06-08	
			Rev.		NR5004-AS03	5/7

SAW Bandpass Filter F465A




Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel (or 1000 pcs / 7" reel)
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

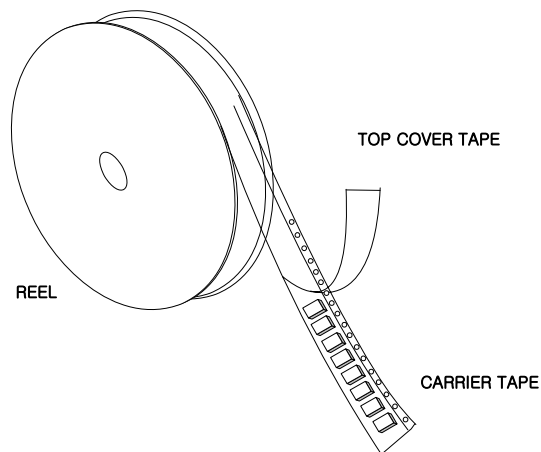

Tape Specification

1. Leader part and vacant position specification

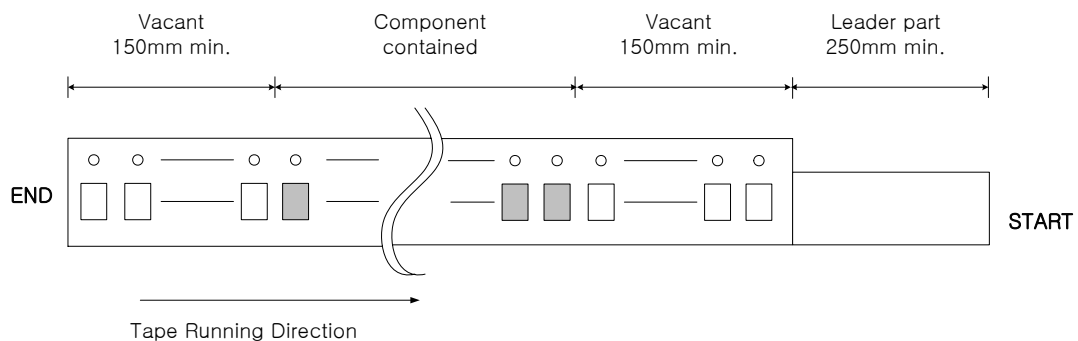


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : $0 \sim 15^\circ$
- 2) speed : 300mm/min
- 3) force : 20~70g

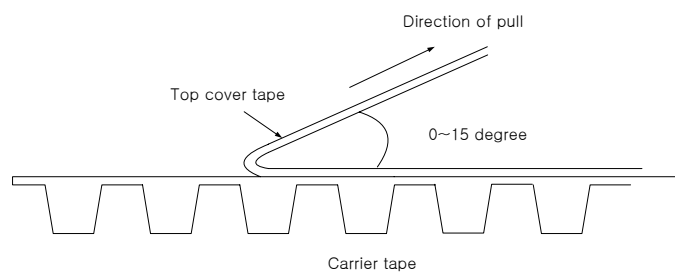


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F465A	
		Rev. Date	2006-06-08	
		Rev.	NR5004-AS03	6/7

SAW Bandpass Filter F465A




Carrier Tape Dimensions [unit : mm]

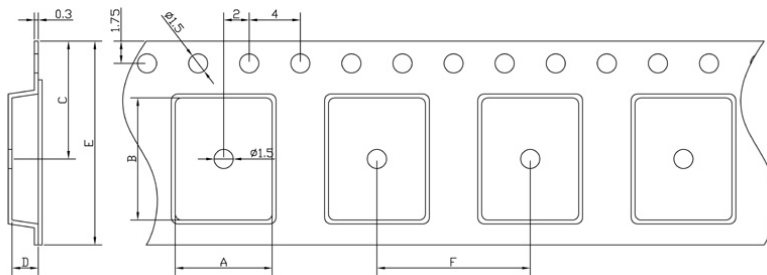


A	4.30 ± 0.1
B	4.30 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

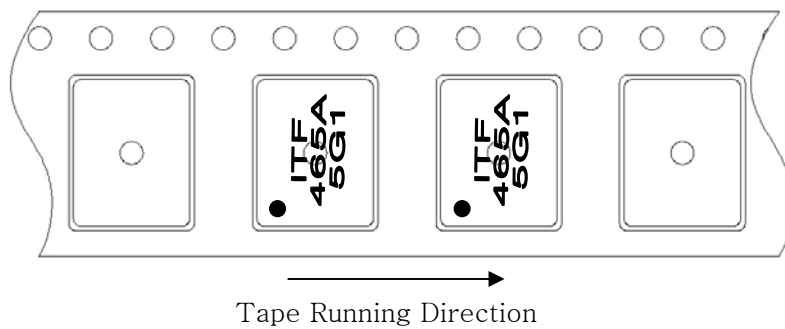

Reel Dimensions [unit : mm]

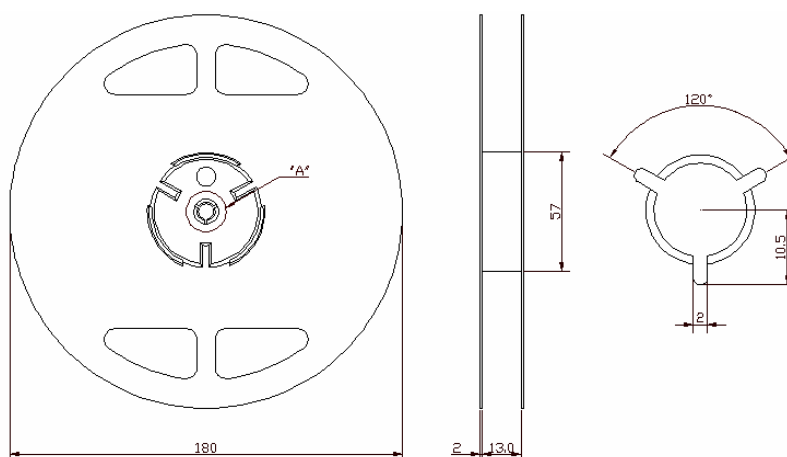

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F465A	
		Rev. Date	2006-06-08	
		Rev.	NR5004-AS03	7/7