



ES2AB thru ES2JB

SURFACE MOUNT SUPERFAST RECTIFIER

VOLTAGE - 50 TO 600 VOLTS CURRENT - 2.0 AMPERES



SMB/DO-214AA

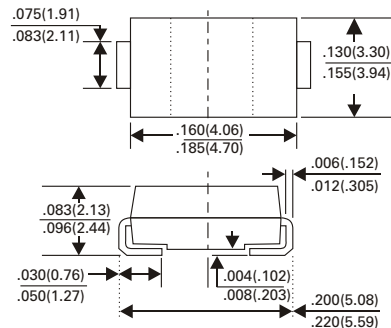

Dimensions in inches and (millimeters)

FEATURES

- For surface mount applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Superfast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junction
- High temperature soldering : 260°C/10seconds at terminals
- Pb free product are available : 99% Sn above can meet RoHS Environment substance directive request

MECHANICAL DATA

Case : JEDEC DO-214AA molded plastic
Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
Polarity : indicated by cathode band
Standard packaging : 16mm tape (EIA-481)
Weight : 0.003 ounce, 0.093grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified
Single phase, half wave, 60Hz, resistive or inductive load
For capacitive load, derate current by 20%

	SYMBOL	ES2AB	ES2BB	ES2CB	ES2DB	ES2EB	ES2GB	ES2JB	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	Volts
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	420	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	Volts
Maximum Average Forward Rectified Current @ T _L = 110°C	I _(AV)	2.0							Amps
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	50							Amps
Maximum Instantaneoue Forward Voltage at 2.0A	V _F	0.95				1.25		1.7	Volts
Maximum DC Reverse Current @T _J =25°C at Rated DC Blocking Voltage @T _J =100°C	I _R	5.0 100							μ A
Maximum Reverse Recovery Time (NOTE 1)	T _{RR}	35							nS
Typical Junction Capacitance (NOTE 2)	C _J	25							pF
Typical Thermal Resistance (NOTE 3)	R θ JA	20							°C / W
Operating and Storage Temperature Range	T _J T _{STG}	-55 to +150							°C

NOTES :

1. Reverse Recovery Test Conditions $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$
2. Measured at 1 MHz and applied reverse voltage of 4.0VDC
3. 8.0mm^2 (.013mm thick) land areas

ES2AB thru ES2JB

SURFACE MOUNT SUPERFAST RECTIFIER

RATING AND CHARACTERISTICS CURVES ES2AB THRU ES2JB

Fig. 1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM ES1A THRU ES1G

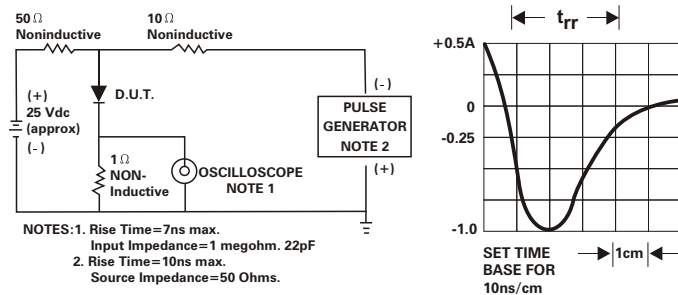


Fig. 2 - MAXIMUM AVERAGE FORWARD CURRENT RATING

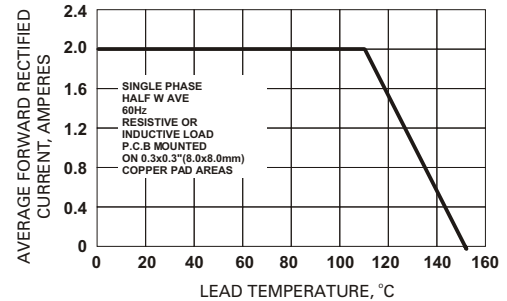


Fig. 3 - TYPICAL REVERSE CHARACTERISTICS

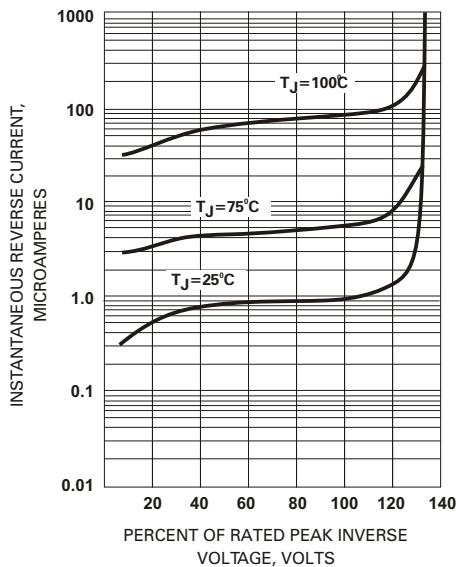


Fig. 4 - TYPICAL FORWARD CHARACTERISTICS

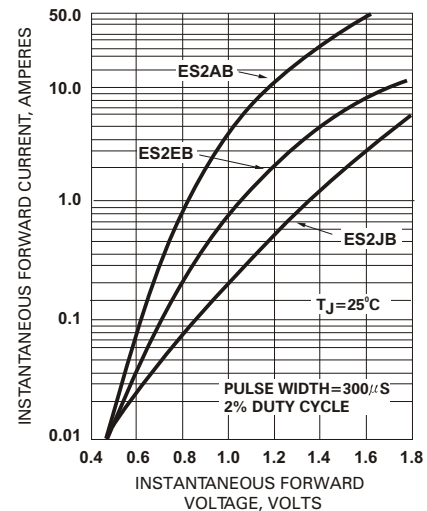


Fig. 5 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

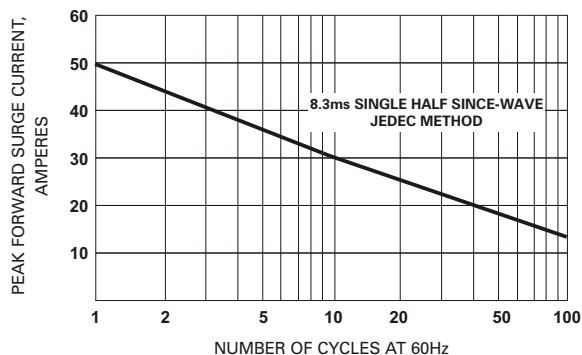


Fig. 6 - TYPICAL JUNCTION CAPACITANCE

