


EXAMINED BY : 	EMERGING DISPLAY TECHNOLOGIES CORPORATION	FILE NO . CAS-10240
APPROVED BY: David Chang		ISSUE : MAR.20,2001
		TOTAL PAGE : 7
		VERSION : 1
CUSTOMER	ACCEPTANCE	SPECIFICATIONS
MODEL NO. : <u>ES16201(TRANSFLECTIVE TYPES)</u> FOR MESSRS : _____ CUSTOMER'S APPROVAL DATE : _____ BY : _____		

EMERGING DISPLAY
TECHNOLOGIES CORPORATION

MODEL NO .
ES16201(TRANSFLECTIVE TYPES)

VERSION
1

RECORDS OF REVISION

DOC . FIRST ISSUE

MAR.20,2001

DATE

REVISED
PAGE
NO.

SUMMARY

NUMBERING SYSTEM

Polarizer Mode	Backlight	Code value
Transflective	—	P

Module type:
S : Chip on glass

E S 16 2 01 G P

LCD type + color	Code Value
STN + Yellow-Green	Y
STN + Gray	G

TABLE OF CONTENTS

NO.	ITEM	PAGE
=====	=====	=====
1.	GENERAL SPECIFICATIONS -----	1
2.	MECHANICAL SPECIFICATIONS -----	1
3.	ABSOLUTE MAXIMUM RATINGS -----	2
4.	ELECTRICAL CHARACTERISTICS -----	3
5.	OPTICAL CHARACTERISTICS -----	3
6.	OUTLINE DIMENSION -----	4
7.	DETAIL DRAWING OF DOT MATRIX -----	5
8.	BLOCK DIAGRAM -----	5
9.	INTERFACE SIGNALS -----	6
10.	POWER SUPPLY -----	7
11.	DISPLAY DATA RAM ADDRESS -----	7

1. GENERAL SPECIFICATIONS

1.1 GENERAL SPECIFICATIONS

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

E U - 0 0 2 A

1.2 APPLICATION NOTES FOR CONTROLLER / DRIVER : NT7603

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

E U - N T 7 6 0 3

1.3 THIS INDIVIDUAL SPECIFICATIONS IS PRIOR TO GENERAL SPECIFICATIONS .

2. MECHANICAL SPECIFICATIONS

- (1) NUMBER OF CHARACTER ----- 16 CH * 2 LINE
- (2) MODULE SIZE ----- 69.0W * 30.0H * 3.0D (max.) mm
- (3) EFFECTIVE AREA ----- 63.0W * 18.0H mm
- (4) CHARACTER FONT ----- 5 * 7 DOTS + CURSOR
- (5) CHARACTER SIZE ----- 2.96W * 5.56H mm
- (6) CHARACTER PITCH ----- 3.55(W)*5.94 (H)
- (7) DOT SIZE ----- 0.56W * 0.66H mm
- (8) DOT PITCH ----- 0.60W * 0.70H mm
- (9) LCD TYPE *
- (10) DRIVING METHOD ----- 1 / 16 DUTY MULTIPLEX DRIVE

* PLEASE REFER TO NUMBERING SYSTEM

3. ABSOLUTE MAXIMUM RATINGS

3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS . (AT Ta = 25 °C)

PARAMETER	SYMBOL	MIN .	MAX .	UNIT	REMARK
POWER SUPPLY FOR LOGIC	VDD – VSS	0	7 . 0	V	
POWER SUPPLY FOR LCD DRIVE	VDD – VO	0	5 . 0	V	
INPUT VOLTAGE	VI	VSS	VDD	V	
STATIC ELECTRICITY	—	—	1 0 0	V	NOTE (1)

NOTE (1) : TEST METHOD AND CONDITIONS :

AFTER CHARGING UP 200 PF CAPACITOR BY STATED VOLTAGE ,
THE CAPACITOR IS CONNECTED WITH INTERFACE PINS OF THE
MODULE .

3.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS .

I T E M	OPERATING		STORAGE		REMARK
	MIN .	MAX .	MIN .	MAX .	
AMBIENT TEMPERATURE	- 2 0 °C	7 0 °C	- 3 0 °C	8 0 °C	NOTE (2) , (3)
HUMIDITY	—	9 0 % RH	—	9 0 % RH	WITHOUT CONDENSATION
VIBRATION	—	4 . 9 m /s ² (0 . 5 G)	—	1 9 . 6 m /s ² (2 G)	
SHOCK	—	2 9 . 4 m /s ² (3 G)	—	4 9 0 . 0 m /s ² (5 0 G)	XYZ DIRECTIONS
CORROSIVE GAS	NOT ACCEPTABLE		NOT ACCEPTABLE		

NOTE (2) : Ta AT -30°C : 48HR MAX .

80°C : 168HR MAX .

NOTE (3) : BACKGROUND COLOR CHANGES SLIGHTLY DEPENDING ON AMBIENT
TEMPERATURE THIS PHENOMENON IS REVERSIBLE .

4. ELECTRICAL CHARACTERISTICS

		Ta = 25°C		VDD = 5.0 ± 0.5V			
PARAMETER	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT	NOTE
H LEVEL INPUT VOLTAGE	VIH	—	2.2	—	VDD	V	2
L LEVEL INPUT VOLTAGE	VIL	—	-0.3	—	0.8	V	—
H LEVEL OUTPUT VOLTAGE	VOH	-IOH = 0.2 mA	2.4	—	—	V	2
L LEVEL OUTPUT VOLTAGE	VOL	IOL = 1.2 mA	—	—	0.4	V	—
POWER SUPPLY CURRENT (LOGIC)	IDD	VDD = 5.0 V	—	1.0	1.5	mA	—
RECOMMENDED LCD DRIVING VOLTAGE	VDD - VO ∅ = 10° θ = 0° DUTY = 1/16	Ta = -20 °C	—	4.5	—	V	—
		Ta = 25 °C	—	4.5	—		
		Ta = 70 °C	—	4.5	—		
CLOCK OSCILLATION FREQUENCY	FOSC	Ta = 25 °C	380	540	700	KHZ	—

5. OPTICAL CHARACTERISTICS .


			Ta = 25°C		VDD = 5.0 V			
I T E M	SYMBOL	CONDITION	MIN .	TYP .	MAX	UNIT	NOTE	
VIEWING AREA	Ø 2 - Ø 1	K ≥ 1.4	3 0	—	—	deg.	1	
CONTRAST RATIO	K	Ø = 10° θ = 0°	—	5	—	—	1	
RESPONSE TIME	tr (rise)	Ø =10° θ = 0°	Ta = -20°C	—	5538	—	ms	1
			Ta = 25°C	—	228	—		
			Ta = 70°C	—	104	—		
	tf (fall)		Ta = -20°C	—	2316	—		
			Ta = 25°C	—	174	—		
			Ta = 70°C	—	85	—		

NOTE (1): PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATION : E U - 002 A


NOTE (2): APPLICABLE : DB0 ~ DB7 , RS , R/W , E

6. OUTLINE DIMENSION

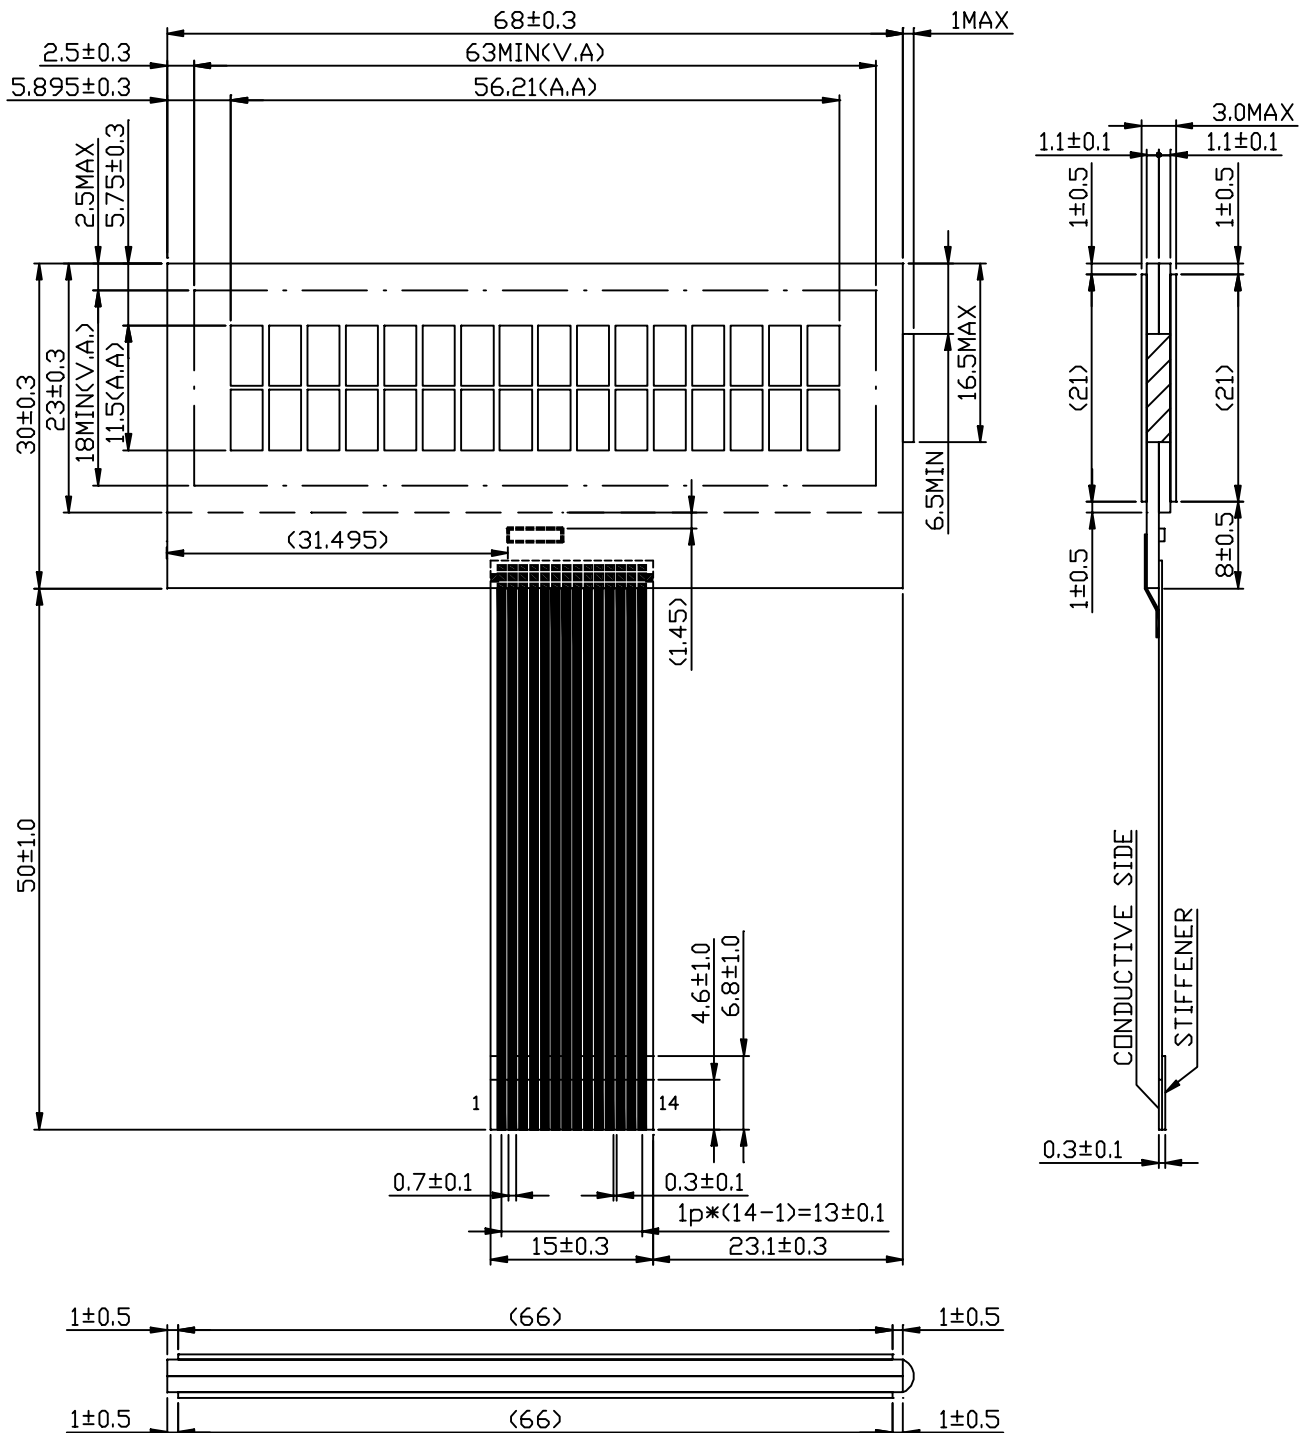

UNIT : mm
SCALE : NTS
NOT SPECIFIED TOLERANCE IS ± 0.5

7. DETAIL DRAWING OF DOT MATRIX

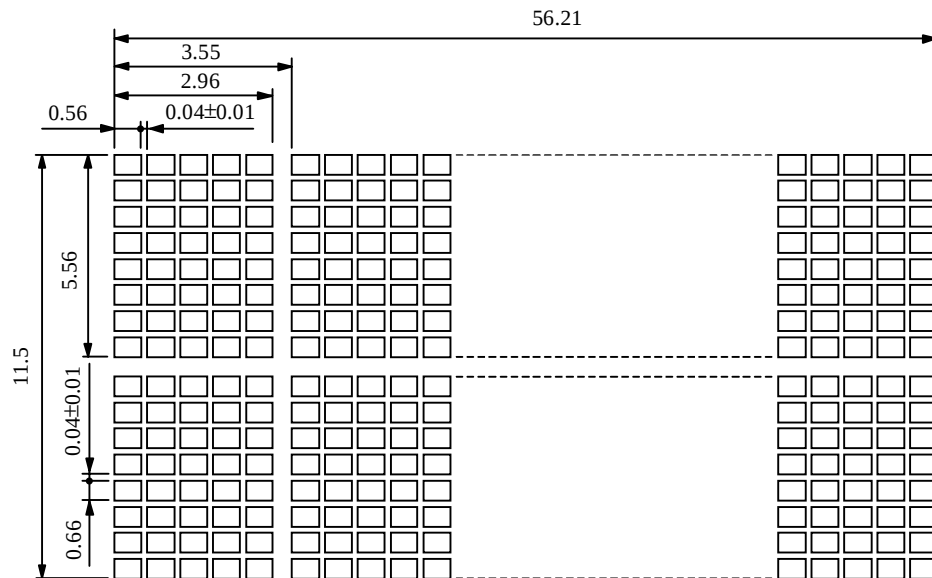


UNIT : mm

SCALE : NTS

NOT SPECIFIED TOLERANCE IS ± 0.1

8. BLOCK DIAGRAM

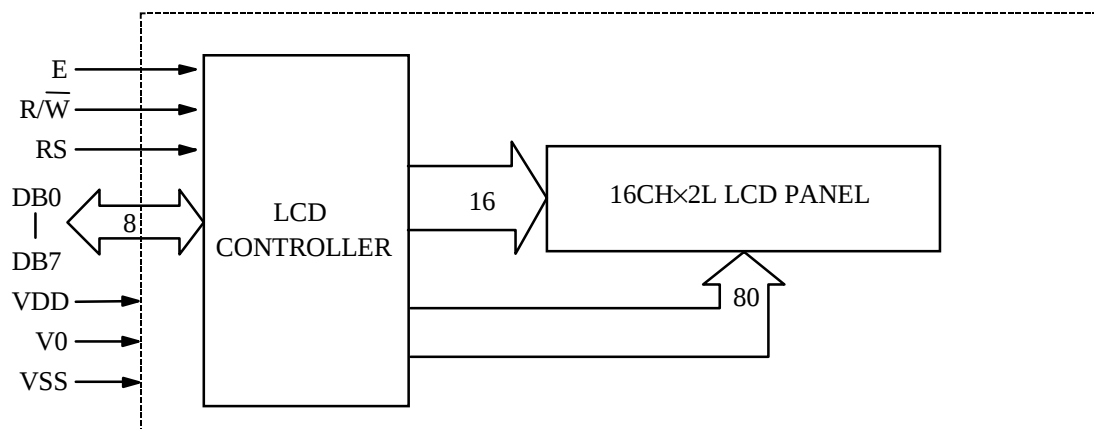


9. INTERFACE SIGNALS

PIN NO.	SYMBOL	DESCRIPTION	FUNCTION
1	VSS	GROUND	0V (GND)
2	VO	LCD CONTRAST ADJUSTMENT	
3	VDD	POWER SUPPLY FOR LOGIC CIRCUIT	+5V
4	RS	INSTRUCTION/DATA REGISTER SELECTION	RS = 0 : INSTRUCTION REGISTER RS = 1 : DATA REGISTER
5	$\overline{R/W}$	READ/WRITE SELECTION	$\overline{R/W}$ = 0 : REGISTER WRITE $\overline{R/W}$ = 1 : REGISTER READ
6	E	ENABLE INPUT	
7	DB0	DATA INPUT/OUTPUT LINES	4 BIT/8BIT SELECTABLE 4 BIT : DB4 - DB7 8 BIT : DB0 - DB7
8	DB1		
9	DB2		
10	DB3		
11	DB4		
12	DB5		
13	DB6		
14	DB7		

10. POWER SUPPLY

10.1 POWER SUPPLY FOR LCD MODULE

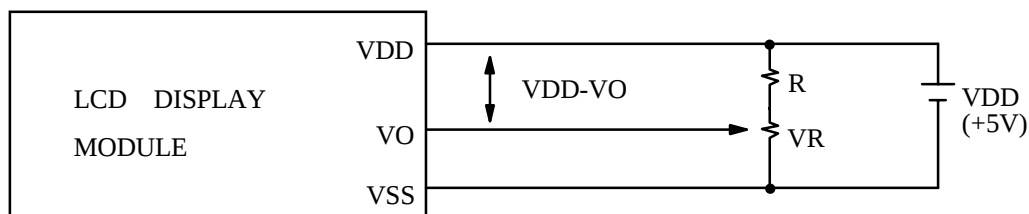

VDD - VO : LCD DRIVING VOLTAGE

VR : $10K \Omega \sim 20K \Omega$

RECOMMENDED RESISTOR R : $VDD - VO \geq 1.5 V$

11. DISPLAY DATA RAM ADDRESS

CHARACTER	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
LINE 1	80	81	82	83	84	85	86	87	88	89	8A	8B	8C	8D	8E	8F
LINE 2	C0	C1	C2	C3	C4	C5	C6	C7	C8	C9	CA	CB	CC	CD	CE	CF